



**WINLIGHT**

WINNER LIGHT CORPORATION CO., LTD.

**LANDSCAPE LIGHTING**

# POST TOP LIGHT





## SPECIFICATION

Parameter	Smart Post Top G3
Type	BGP161
Light Source	Mid Power LED
Power Consumption	27W
Input Voltage	220-240V AC, 50/60 Hz
System lumen output	2300lm @ 3000K CCT 2500lm @ 4000K CCT
System Efficacy	> 85lm/w @ 3000K CCT > 92lm/w @ 4000K CCT
CRI	> 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 4
Optics	Symmetrical Beam
Materials and finishing	Housing: Die-casting Alum., 500hrs salt spray Optical cover: Polycarbonate, Anti-UV Color: Dark Grey RAL7043 / Light Grey RAL9006
Lifetime	50K hours (70% lumen maintenance @ Ta = 35°C)
Mounting Pole Dimensions	Ø60mm, leader cable 0.5m
Luminaire Dimension	Ø578mm x H265mm
Weight	4.5Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 07
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, RoHS, IEC, GB7000



TYPE	POWER	CCT	COLOR	PRICE
BGP161 LED2500/WW PSU 220-240V 9006	27W	3000K	9006 (Light Grey)	13,700
BGP161 LED2500/WW PSU 220-240V 7043	27W	3000K	7043 (Dark Grey)	13,700
BGP161 LED2500/NW PSU 220-240V 9006	27W	4000K	9006 (Light Grey)	13,700
BGP161 LED2500/NW PSU 220-240V 7043	27W	4000K	7043 (Dark Grey)	13,700

\* (ราคาไม่รวมเสาไฟและฐานราก)

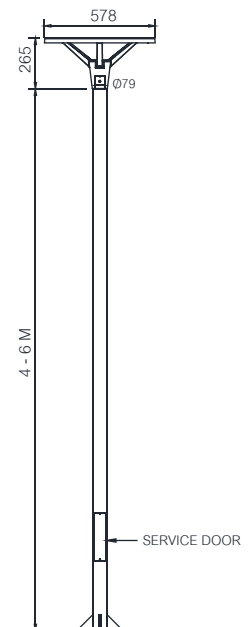

[www.winnerlight.co.th](http://www.winnerlight.co.th)

# POST TOP LIGHT



## SPECIFICATION

Parameter	CitySpirit Street
Type	BDS480
Light Source	Mid Power LED
Power Consumption	37W 71W
Input Voltage	220-240V AC, 50/60 Hz
System lumen output	4200lm 8400lm
CRI	> 70
Connection	Complete with 6m flying cable
Control Interface	PSU: On/Off PSD: DALI-dimming CityTouch ready: Available upon request
Materials and finishing	Die-cast aluminum housing, tempered glass BDS480 Die-cast aluminum housing, tempered glass
Housing body colour	Ultra Dark Grey (RAL7022)
Lifetime	50K hours (70% lumen maintenance @ Ta = 35°C)
Mounting Pole Dimensions	Ø60mm
Weight	13.7Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 09
Operating Temperature	- 40°C to + 50°C
Certifications	CB, CQC





TYPE	POWER	CCT	PRICE
BDS480 LED42/NW PSD 220-240V DW2 MP1 GM	37W	4000K	30,900
BDS480 LED42/NW PSU 220-240V DW2 MP1 GM	37W	4000K	28,200
BDS480 LED42/WW PSD 220-240V DW2 MP1 GM	37W	3000K	30,900
BDS480 LED42/WW PSU 220-240V DW2 MP1 GM	37W	3000K	28,200
BDS480 LED84/NW PSD 220-240V DW2 MP1 GM	71W	4000K	32,800
BDS480 LED84/NW PSU 220-240V DW2 MP1 GM	71W	4000K	29,900
BDS480 LED84/WW PSD 220-240V DW2 MP1 GM	71W	3000K	32,800
BDS480 LED84/WW PSU 220-240V DW2 MP1 GM	71W	3000K	29,900

\* (ราคาไม่รวมเสาไฟและฐานราก)



[www.winnerlight.co.th](http://www.winnerlight.co.th)

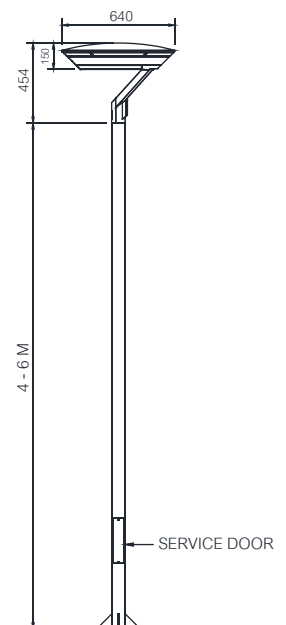

# POST TOP LIGHT




## SPECIFICATION


Parameter	CitySpirit Cone
Type	BDS470
Light Source	Mid Power LED
Power Consumption	High lumen version: 51W Low lumen version: 33W
Input Voltage	220-240V AC, 50/60 Hz
System lumen output	55xLED version: TA & TB: 4300lm, TS: 3900lm 35xLED version: TA & TB: 2700lm, TS: 2500lm
CRI	> 70
Color Consistency	SDCM = 5
Optics	TS: Symmetrical TA: Asymmetrical TB: Road configuration
Materials and finishing	UV-resistant transparent PC texture lampshade, high-pressure casting aluminium light body and upper cover
Housing body colour	Dark Grey (RAL7043)
Lifetime	50K hours (70% lumen maintenance @ Ta = 35°C)
Mounting Pole Dimensions	Ø60mm
Weight	10Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 09
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, RoHS, IEC, GB7000



TYPE	POWER	CCT	PRICE
BDS470 C 35xLED/NW PSU 220-240V TS 7043	33W	4000K	27,700
BDS470 C 35xLED/WW PSU 220-240V TS 7043	33W	3000K	27,900
BDS470 C 35xLED/NW PSU 220-240V TA 7043	33W	4000K	27,700
BDS470 C 35xLED/WW PSU 220-240V TA 7043	33W	3000K	27,900
BDS470 C 35xLED/NW PSU 220-240V TB 7043	33W	4000K	27,700
BDS470 C 35xLED/WW PSU 220-240V TB 7043	33W	3000K	27,900
BDS470 C 55xLED/NW PSU 220-240V TS 7043	51W	4000K	27,700
BDS470 C 55xLED/WW PSU 220-240V TS 7043	51W	3000K	27,900
BDS470 C 55xLED/NW PSU 220-240V TA 7043	51W	4000K	27,700
BDS470 C 55xLED/WW PSU 220-240V TA 7043	51W	3000K	27,900
BDS470 C 55xLED/NW PSU 220-240V TB 7043	51W	4000K	28,100
BDS470 C 55xLED/WW PSU 220-240V TB 7043	51W	3000K	28,100

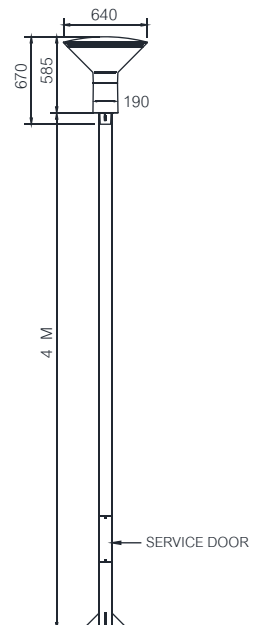

\* (ราคาไม่รวมเสาไฟและฐานราก)



[www.winnerlight.co.th](http://www.winnerlight.co.th)

# POST TOP LIGHT





## SPECIFICATION

Parameter	UNIUrban
Type	BDP461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 3000lm 65W: 6000lm 100W: 10000lm
System Efficacy	≥ 100lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	TS: Symmetrical 90°*90°
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 20cm, 3*1.0mm <sup>2</sup>
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Mounting Pole Dimensions	Ø55-60 outer diameter
Weight	10.7-11.5KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Post-Top



TYPE	POWER	CCT	TILT ANGLE	PRICE
BDP461 LED33/WW 110-277V TS	33W	3000K	N.A	16,000
BDP461 LED33/NW 110-277V TS	33W	4000K	N.A	16,000
BDP461 LED65/WW 110-277V TS	65W	3000K	N.A	18,000
BDP461 LED65/NW 110-277V TS	65W	4000K	N.A	18,000
BDP461 LED100/WW 110-277V TS	100W	3000K	N.A	20,000
BDP461 LED100/NW 110-277V TS	100W	4000K	N.A	20,000

\* ราคาไม่รวมเสาไฟและฐานราก

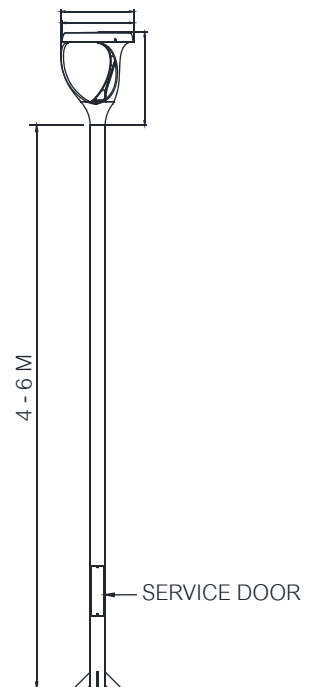

# POST TOP LIGHT




## SPECIFICATION

Parameter	UNIUrban
Type	BGP461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 4000lm 65W: 7800lm 100W: 12000lm
System Efficacy	≥ 120lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	TS: Symmetrical 90°*90° TA: Asymmetrical 150°*75°
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 20cm, 3*1.0mm <sup>2</sup>
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Weight	9.7-10.5KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Side-entry



TYPE	POWER	CCT	TILT ANGLE	PRICE
BGP461 LED40/WW 110-277V TS	33W	3000K	±15°	13,600
BGP461 LED40/NW 110-277V TS	33W	4000K	±15°	13,600
BGP461 LED40/WW 110-277V TA	33W	3000K	±15°	13,600
BGP461 LED40/NW 110-277V TA	33W	4000K	±15°	13,600
BGP461 LED78/WW 110-277V TS	65W	3000K	±15°	15,900
BGP461 LED78/NW 110-277V TS	65W	4000K	±15°	15,900
BGP461 LED78/WW 110-277V TA	65W	3000K	±15°	15,900
BGP461 LED78/NW 110-277V TA	65W	4000K	±15°	15,900
BGP461 LED120/WW 110-277V TS	100W	3000K	±15°	18,000
BGP461 LED120/NW 110-277V TS	100W	4000K	±15°	18,000
BGP461 LED120/WW 110-277V TA	100W	3000K	±15°	18,000
BGP461 LED120/NW 110-277V TA	100W	4000K	±15°	18,000

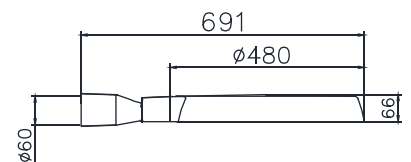

\* ราคาไม่รวมเสาไฟและฐานราก



# POST TOP LIGHT




## SPECIFICATION

Parameter	UNIUrban
Type	BSP461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 4000lm 65W: 7800lm 100W: 12000lm
System Efficacy	≥ 120lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	TS: Symmetrical 90°*90° TA: Asymmetrical 150°*75°
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 60cm, 3*1.0mm <sup>2</sup>
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Weight	8.5-9.3KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Suspend



TYPE	POWER	CCT	TILT ANGLE	PRICE
BSP461 LED40/WW 110-277V TS	33W	3000K	N.A	12,850
BSP461 LED40/NW 110-277V TS	33W	4000K	N.A	12,850
BSP461 LED40/WW 110-277V TA	33W	3000K	N.A	12,850
BSP461 LED40/NW 110-277V TA	33W	4000K	N.A	12,850
BSP461 LED78/WW 110-277V TS	65W	3000K	N.A	14,850
BSP461 LED78/NW 110-277V TS	65W	4000K	N.A	14,850
BSP461 LED78/WW 110-277V TA	65W	3000K	N.A	14,850
BSP461 LED78/NW 110-277V TA	65W	4000K	N.A	14,850
BSP461 LED120/WW 110-277V TS	100W	3000K	N.A	16,950
BSP461 LED120/NW 110-277V TS	100W	4000K	N.A	16,950
BSP461 LED120/WW 110-277V TA	100W	3000K	N.A	16,950
BSP461 LED120/NW 110-277V TA	100W	4000K	N.A	16,950

\* ราคาไม่รวมเสาไฟและฐานราก



ZSP461 Screw-thread 7  
70mm



# POST TOP LIGHT



## SPECIFICATION

Parameter	UNIUrban
Type	BSP461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 4000lm 65W: 7800lm 100W: 12000lm
System Efficacy	≥ 120lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	TS: Symmetrical 90°*90° TA: Asymmetrical 150°*75°
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 60cm, 3*1.0mm <sup>2</sup>
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Weight	8.5-9.3KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Classic Suspend




TYPE	POWER	CCT	TILT ANGLE	PRICE
BSP461 LED40/WW 110-277V TS	33W	3000K	N.A	15,300
BSP461 LED40/NW 110-277V TS	33W	4000K	N.A	15,300
BSP461 LED40/WW 110-277V TA	33W	3000K	N.A	15,300
BSP461 LED40/NW 110-277V TA	33W	4000K	N.A	15,300
BSP461 LED78/WW 110-277V TS	65W	3000K	N.A	17,300
BSP461 LED78/NW 110-277V TS	65W	4000K	N.A	17,300
BSP461 LED78/WW 110-277V TA	65W	3000K	N.A	17,300
BSP461 LED78/NW 110-277V TA	65W	4000K	N.A	17,300
BSP461 LED120/WW 110-277V TS	100W	3000K	N.A	19,400
BSP461 LED120/NW 110-277V TS	100W	4000K	N.A	19,400
BSP461 LED120/WW 110-277V TA	100W	3000K	N.A	19,400
BSP461 LED120/NW 110-277V TA	100W	4000K	N.A	19,400

\* ราคาไม่รวมเสาไฟและฐานราก

ZSP461 Screw-thread 37  
370mm

ZCP461 Dome cover



[www.winnerlight.co.th](http://www.winnerlight.co.th)



# POST TOP LIGHT




## SPECIFICATION

Parameter	UNIUrban
Type	BSS461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 4000lm 65W: 7800lm 100W: 12000lm
System Efficacy	≥ 120lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	PC cover
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 60cm, 3*1.0mm <sup>2</sup>
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Weight	7.7-8.5KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Classic Suspend



TYPE	POWER	CCT	TILT ANGLE	PRICE
BSS461 LED40/WW 110-277V CLASSIC	33W	3000K	N.A	18,200
BSS461 LED40/NW 110-277V CLASSIC	33W	4000K	N.A	18,200
BSS461 LED78/WW 110-277V CLASSIC	65W	3000K	N.A	20,100
BSS461 LED78/NW 110-277V CLASSIC	65W	4000K	N.A	20,100
BSS461 LED120/WW 110-277V CLASSIC	100W	3000K	N.A	22,300
BSS461 LED120/NW 110-277V CLASSIC	100W	4000K	N.A	22,300

\* ราคาไม่รวมเสาไฟและฐานราก

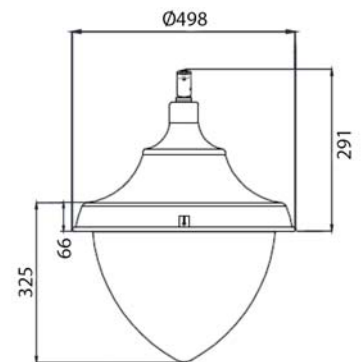

ZSP461 Screw-thread 24  
240mm

ZCP461 Chess cover



[www.winnerlight.co.th](http://www.winnerlight.co.th)





## SPECIFICATION

Parameter	UNIBollard
Type	BCP210/211/212
Light Source	LED
Power Consumption	13W
Input Voltage	100-240V AC, 50/60 Hz
System lumen output	1000lm
System Efficacy	65lm/w
CRI	> 80
Color Temperature	2700K / 3000K / 4000K / 6500K
Optics cover/ lens type	Polycarbonate bowl/ cover opal
Materials and finishing	Housing: Aluminium Optical cover: Polycarbonate Color: Aluminium and white
Surge Rating	2kV/4kV
Cable	Cable 0.3 m with connector 3-pole
Weight	BCP210 = 2.1Kg net weight BCP211 = 2.5Kg net weight BCP212 = 4.3Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 06
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF



TYPE	POWER	H (mm.)	PRICE
BCP210 LED1000/WW 13W 100-240V Rec AL	13W	450	4,840
BCP211 LED1000/WW 13W 100-240V Rec AL	13W	600	5,940
BCP212 LED1000/WW 13W 100-240V Rec AL	13W	1200	7,590

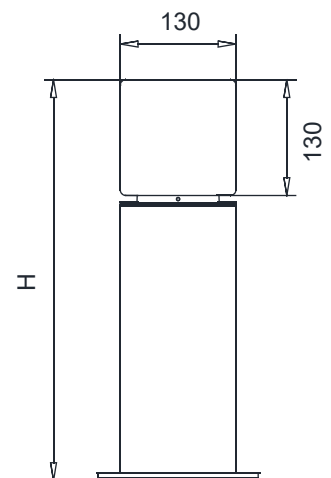

# BOLLARD LIGHT




## SPECIFICATION


Parameter	UNIBollard
Type	BCP310/311/312
Light Source	LED
Power Consumption	15W
Input Voltage	100-240V AC, 50/60 Hz
System lumen output	760lm
System Efficacy	40lm/w
CRI	> 80
Color Temperature	2700K / 3000K / 4000K / 6500K
Optics cover/ lens type	PCF Polycarbonate bowl/cover frosted
Materials and finishing	Housing: Aluminium Optical cover: Polycarbonate Color: Black and Aluminium
Surge Rating	1kV/2kV
Cable	Cable 0.3 m with connector 3-pole
Weight	BCP310 = 1.45Kg net weight BCP311 = 2.5Kg net weight BCP312 = 4.3Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 06
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF



TYPE	POWER	H (mm.)	PRICE
BCP310 LED760/WW 15W 100-240V Cyl BK	15W	300	4,840
BCP311 LED760/WW 15W 100-240V Cyl BK	15W	600	5,940
BCP312 LED760/WW 15W 100-240V Cyl BK	15W	1200	7,590

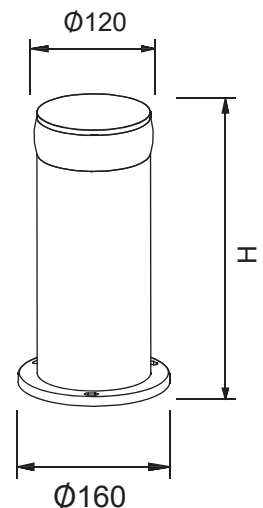

# BOLLARD LIGHT

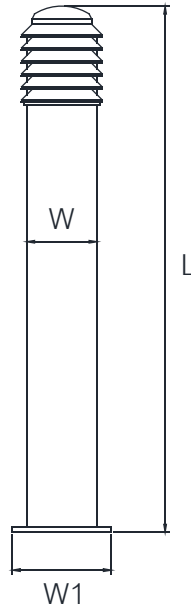

## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH STEEL POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE


- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL100 E27 L500	500	135	190	3,500
WBL100 E27 L1000	1000	135	190	4,000



# BOLLARD LIGHT

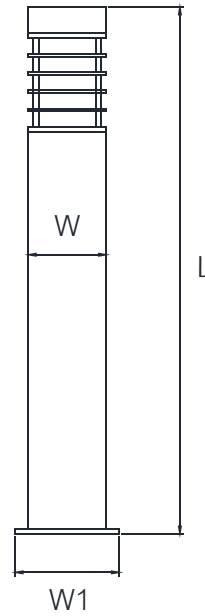

## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH ALUMINIUM POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL ACRYLIC DIFFUSER (OP)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL102 E27 L1000	1000	147	205	4,000



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH STEEL POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL GLASS DIFFUSER (OG)
- FOR CLEAR GLASS DIFFUSER (CG)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL103 E27 L500	500	118	135	3,500
WBL103 E27 L1000	1000	118	135	4,000



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH STEEL POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL GLASS DIFFUSER (OG)
- FOR CLEAR GLASS DIFFUSER (CG)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE


- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL104 E27 L520	520	155	165	3,500
WBL104 E27 L1000	1000	155	165	4,000



# BOLLARD LIGHT

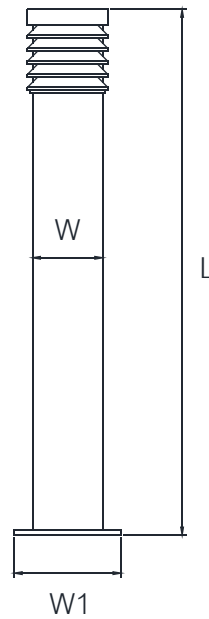

## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH STEEL POLE
- STAINLESS STEEL SCREWS
- UV STABILIZED POLYESTER POWDER COAT

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL106 E27 L480	480	135	190	3,500
WBL106 E27 L980	980	135	190	4,000





# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH STEEL POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL GLASS DIFFUSER (OG)
- FOR CLEAR GLASS DIFFUSER (CG)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL108 E27 L500	500	125	165	3,500
WBL108 E27 L1000	1000	125	165	4,000



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM WITH ALUMINIUM POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

FOR CLEAR ACRYLIC DIFFUSER (CL)

### COLOR

- DARK GRAY

### PROTECTION CLASS

- IP 54

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL109 E27 L350	350	120	170	2,200
WBL109 E27 L650	650	120	170	2,950



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM TOP COVER WITH ALUMINIUM POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

FOR CLEAR GLASS DIFFUSER (CG)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 55

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	PRICE
WBL111 E27 L1000	1000	155	3,000



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM WITH ALUMINIUM POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL ACRYLIC DIFFUSER (OP)

### COLOR

- BLACK , GRAY

### PROTECTION CLASS

- IP 44

### LAMP TYPE


- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL121 E27 L800	800	150	200	4,800



# BOLLARD LIGHT

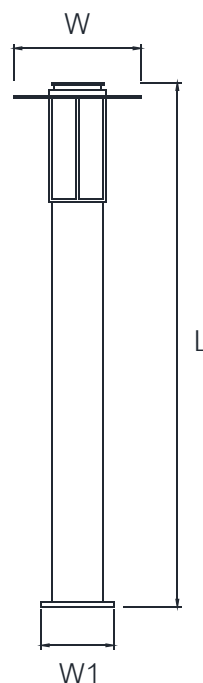

## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM WITH ALUMINIUM POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### DIFFUSER

- FOR OPAL ACRYLIC DIFFUSER (OP)

### COLOR

- BLACK

### PROTECTION CLASS

- IP 54

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	W1	PRICE
WBL122 E27 L800	800	245	140	4,200
WBL122 E27 L1000	1000	245	140	4,600



# BOLLARD LIGHT



## SPECIFICATION

### HOUSING

- CORROSION RESISTANT DIE-CAST ALUMINIUM WITH STEEL POLE
- STAINLESS STEEL SCREWS
- SILICONE GASKET
- UV STABILIZED POLYESTER POWDER COAT

### COLOR

- DARK GRAY

### PROTECTION CLASS

- IP 54

### LAMP TYPE

- 1xE27

### DIMENSIONS (mm.)

MODEL	L	W	PRICE
WBL124 E27 L200	200	108	4,000
WBL124 E27 L640	640	108	4,500





WINNER LIGHT CORPORATION CO., LTD.

37, 39 Soi Ekachai 72, Khlong Bang Phran, Bangbon, Bangkok, 10150 Thailand.

Tax : 0105552124285 Tel : 02-415-7576-7, 081-880-6616 Fax : 02-415-7578

Email : [sale\\_wlc@winnerlight.co.th](mailto:sale_wlc@winnerlight.co.th), [sale.wlc@hotmail.com](mailto:sale.wlc@hotmail.com)

[www.winnerlight.co.th](http://www.winnerlight.co.th)