





	Lamp	Colour temperature	Power		Beam	angle		Cut-off angle	Page
cut out diameter One of the control	LED(CITIZEN)	2700K/3000K	7W	15°	25°	36°	60°	35°	14
rectangular cut out	LED(CITIZEN)	2700K / 3000K	7W	15°	25°	36°	60°	35°	15
rectangular cut out 477142 x 70mm	LED(CITIZEN)	2700K / 3000K	2×7W	15°	25°	36°	60°	35°	16
rectangular cut out 477213 x 70mm	LED(CITIZEN)	2700K / 3000K	3 x 7W	15°	25°	36°	60°	35°	17
rectangular cut out	LED(CITIZEN)	2700K/3000K	7W	15°	25°	36°	60°	35°	18
rectangular cut out 47 102 x 102mm	LED(CITIZEN)	2700K/3000K	15W	2	5° 3	6° 6)°	35°	19



	La	атр Сс	olour temperature	Power	Beam angle	Cut-off angle	Page
cut out diameter			2700K / 3000K	7W	15° 25° 36° 60°	35°	20
cut out diameter	COB LED		2700K / 3000K	15W	25° 36° 60°	35°	21
cut out diameter	COB LED	P54 D(CITIZEN)	2700K/3000K	30W	25° 36° 60°	35°	22
cut out diameter	and the second	O(CITIZEN)	2700K/3000K	7W	15° 25° 36° 60°	35°	23
cut out diameter		O(CITIZEN)	2700K/3000K	7W	15° 25° 36° 60°	35°	24
cut out diameter	COB LEE		2700K / 3000K	10W	25° 36° 60°	35°	25
rectangular cut out	COB LED		2700K/3000K	15W	25° 36° 60°	35°	26

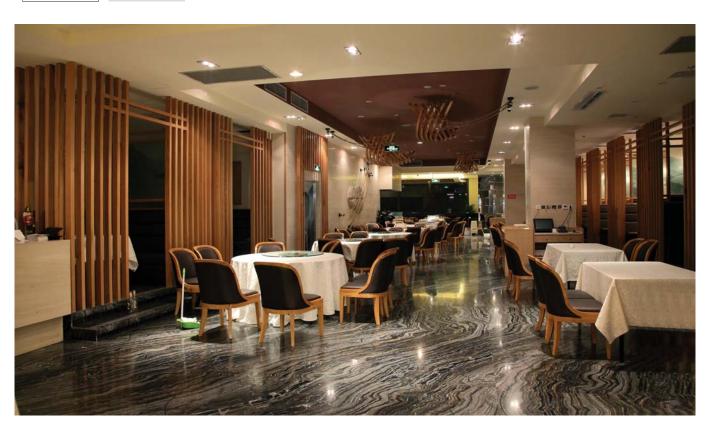

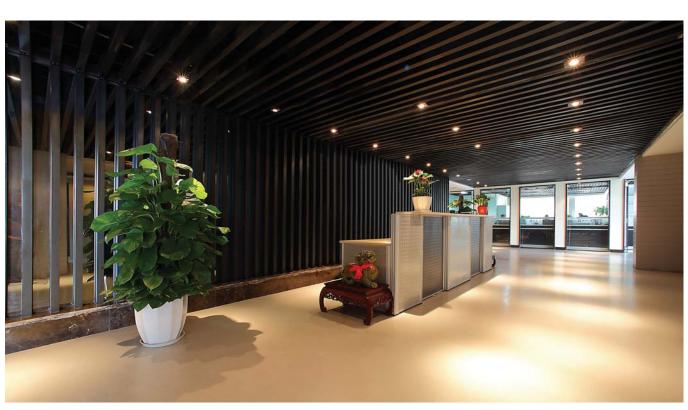







 COB LED(CITIZEN)
 7W
 436

 COB LED(CITIZEN)
 10W
 437

 LED QR-CB51
 7W
 438

 QR-CB51
 50W
 438





 LED QR-CB51
 7W
 442

 QR-CB51
 50W
 442

 LED QPAR16
 7W
 443

 QPAR16
 50W
 443

QPAR16	50W	443
	cut out diameter \$3mm	



COB LED(CITIZEN) 444 7W COB LED(CITIZEN) 445 10W LED QR-CB51 7W QR-CB51 50W 446 LED QPAR16 7W 447 QPAR16 447 50W


cut out diameter 9 83mm	






COB LED(CITIZEN) COB LED(CITIZEN)	7W 10W	470 471
LED QR-CB51	7W	472
QR-CB51	50W	472
LED QPAR16	7W	473
QPAR16	50W	473

QPAR16	5077
	cut out diameter \$\Pi\$ 83mm

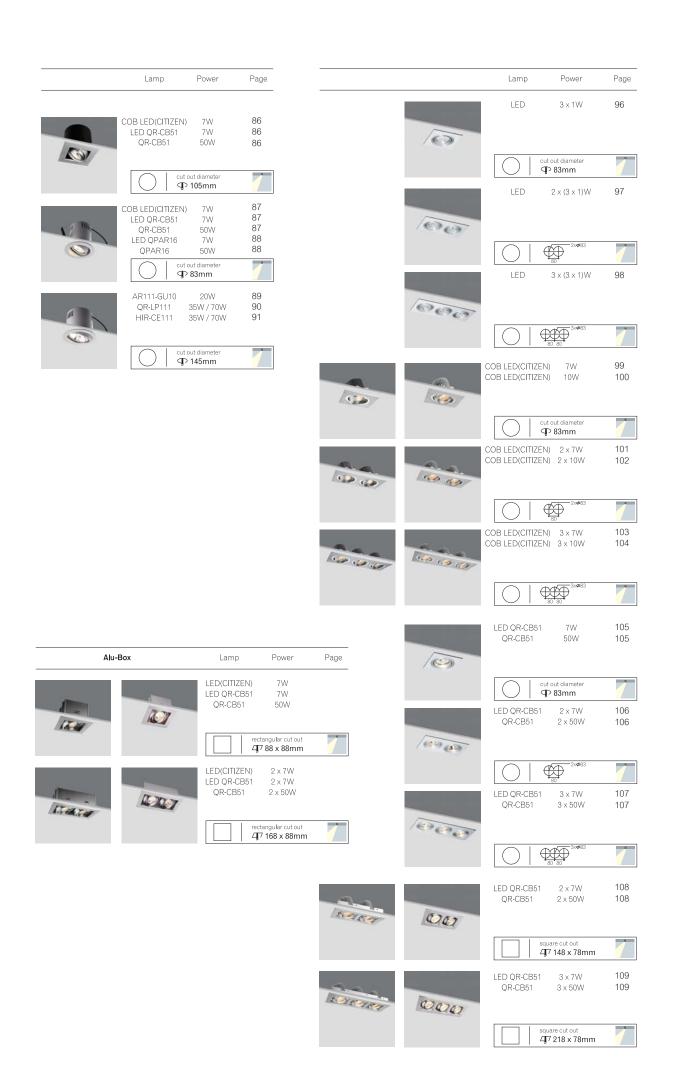





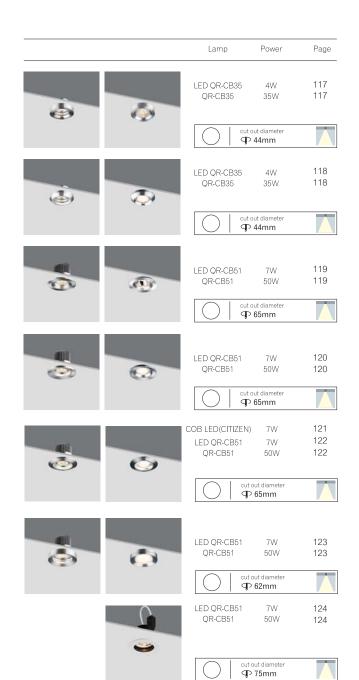

	Lamp	Lamp cap	Power	Beam angle	Cut-off angle	Page
cut out diameter P98mm	LED QR-CB51 QR-CB51 QT12	GU5.3 GU5.3 GY6.35	7W 50W 50W	24° 36° 60° 10° 24° 36° 10° 24° 36°	35° 35° 35°	125 125 126
cut out diameter P 216mm	QPAR38 LED PAR38 HIPAR30 LED PAR30 HIT	E27 E27 E27 E27 G12	120W 17W 70W 12W 150W	12° 30° 10° 40° 10° 40° 25° 30° 40°	40° 40° 40° 40° 40°	131 131 132 132 133
cut out diameter \$\int_{\begin{subarray}{c} \pi \end{subarray}} \frac{171mm}{\pi}\$	QR111 QPAR30 LED PAR30 HIPAR30 HIT	G53 E27 E27 E27 G12	75W 100W 12W 70W 70W	8° 24° 45° 10° 30° 25° 10° 40° 6° 20° 30°	35° 35° 35° 35° 40°	138 139 139 140 141
cut out diameter	QPAR38 LED PAR38 HIPAR30 LED PAR30 HIT	E27 E27 E27 E27 G12	120W 17W 70W 12W 150W	12° 30° 25° 10° 40° 25° 6° 20° 30°	40° 40° 40° 40° 40°	142 142 143 143 144
cut out diameter T 133mm	QT12 HIT-CRI QPAR20 HIPAR20 LED PAR20	GY6.35 G8.5 E27 E27 E27	50W 35W 50W 35W 7W	36° 20° 10° 30° 10° 30° 25°	35° 35° 35° 35° 35°	145 145 146 146 146
cut out diameter \$\sum_{171}\$ 171mm	QPAR30 LED PAR30 HIPAR30 HIT	E27 E27 E27 G12	100W 12W 70W 70W	10° 30° 25° 10° 40° 30°	40° 40° 40° 40°	147 147 147 148
cut out diameter \$\tilde{\Pi}\$ 216mm	QPAR38 LED QPAR38 HIT	E27 E27 G12	120W 17W 150W	12° 30° 25° 24°	40° 40° 40°	149 149 149



	Lamp	Power	Page
and a	LED(CITIZEN)	20W	150
	8°, 16°, 2	4°, 36°	
min	LED(CITIZEN)	30W	151
	8°, 16°, 2	4°, 36°	
	LED(CITIZEN)	30W	152
	8°, 16°, 2	4°, 36°	
7	LED(CITIZEN)	30W	153
	8°, 16°, 2	4°, 36°	
B	LED(CITIZEN)	30W	154
•	12°, 18°,	32°, 36°	
A	LED(CITIZEN)	20W	155
	8°, 16°, 2	4°, 36°	
	LED(CITIZEN)	20W	156
	15°		
	LED(CITIZEN)	30W	157
3	8°, 16°, 2	4°, 36°	




	Lamp	Power	Page
, III.	LED(EDISON) LED(EDISON)	1W 3W	166 166
(Jul	LED(EDISON) LED(EDISON)	2 x 1W 2 x 3W	166 166
Contra	Į.		
10	LED(EDISON) LED(EDISON)	1W 3W	167 167
	LED(EDISON) LED(EDISON)	2 x 1W 2 x 3W	167 167
	LED(EDISON)	2 x 1W	168
1	LED(EDISON)	4 × 1W	168
<u> </u>	K		
1	LED(EDISON) LED(EDISON)	1W 3W	169 169
	COB LED(CITIZEN)	3W	169
U	LED(EDISON)	1W	170 170
	LED(EDISON)	3W	170
T		2 x 1W 2 x 3W	170 170
	-		

	Lamp	Power	Page
1	LED(EDISON)	3 x 1W	171
	COB LED(CITIZEN	N) 1 x 3W	171
	LED(EDISON)	2 x (3 x 1)W	172
	LED(EDISON)	2 x (2 x 1)W	172
	LED(EDISON)	2 x (3 x 1)W	173
	COB LED(CITIZEN	N) 3W	173
H	COB LED(CITIZE	N) 3W	174
	COB LED(CITIZE	N) 3W	174
P	K		

	Lamp	Power	Page
	COB LED(CITIZEN)	3W	175
1			
	LED(EDISON)	2 x 3W	175
	H		
	COB LED(CITIZEN)	3W	176
	V		
	COB LED(CITIZEN)	2 x 3W	176
	!		
	COB LED(CITIZEN) H-PIN	3W 60W	177 177
	H		

	Lamp	Power	Page
L	LED	3 x 1W	178
	LED	2 x (3 x 1)W	178
	H-PIN	40W	
O	H-PIN	40W	179
	LED	5 x 1W	179
	LED LED	$(5 \times 1) + (3 \times 1)W$ $(5 \times 1) + (5 \times 1)W$	180 180
	-		
	LED QPAR16	3 x 1W 50W	181 181
1			
	LED QPAR16	2 x (3 x 1)W 2 x 50W	181 181
=			
	LED QPAR16	2 x (3 x 1)W 2 x 50W	182 182

	Lamp	Power	Page
	LED	3W	183
	LED	2 × 3W	183
	H		
6	LED	3 x 1W	184
1.1	H-PIN	40W	184
	QPAR16	50W	
6	LED TC-DSE H-PIN QPAR16	3 x 1W 9W 40W 50W	185 185 185 185
	LED QPAR16	2 × (3 × 1)W 50W	186
	QFAR10	SUVV	
	LED	3 x 1W	186
	V		

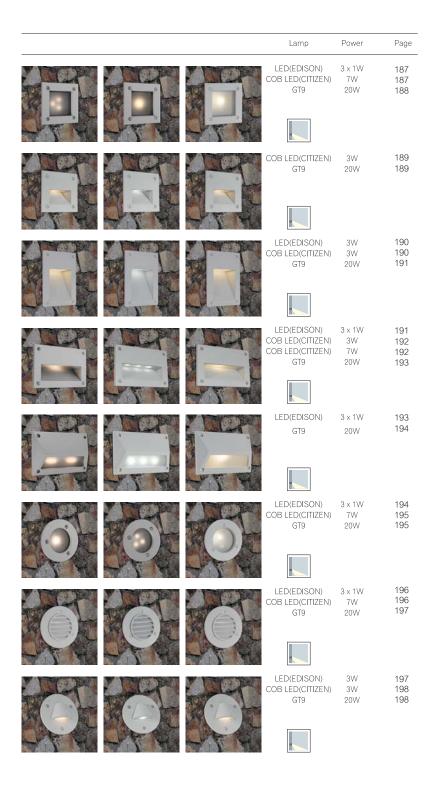

		Lamp	Power	Page
		LED COB LED(CITIZEN	3W) 7W	199-200 199
		LED	3 x 1W	201-202
		LED	2 x (3 x 1)W	203-204
0	3	LED	5 x 1W	205-206
	3	LED	2 x (5 x 1)W	207-208
7		COB LED(CITIZEN) 3×2W	209
		H-PIN	60W	210
		TC-TEL	32W	211-212
		QR-CB51 QPAR16	50W 50W	213 214
		COB LED(CITIZEN		215 215














This product contains an aluminum die-cast front and a pure aluminum heat sink, completes with powder coating;
By using the new generation of CITIZEN COB LED chip, this product creates

By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

A range of PC lens are available with different beam angles;

Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.





DL-R3B0103 AW

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




H-73,J	1 m	3112 lx	0.26 m
60°	2 m	778 lx	0.53 m
PAJ[3 m	346 lx	0.79 m
307	4 m	195 lx	1.05 m
320000	5 m	124 lx	1.32 m
	High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



103,1	1 kn	1397 lx	0.46 m
60°	2 m	349 lx	0.92 m
PAT	3 m	155 lx	1.39 m
309	4 m	87 lx	1.85 m
14000	5 m	56 lx	2.31 m
	High	lluminance	Diameter



W 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43/	100	995 lx	0.65 m
60°	2 m	249 lx	1.30 m
PAL	3 m	111 lx	1.95 m
30°	4 m	62 lx	2.60 m
10000	5 m	40 lx	3.25 m
	High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



	1 m	274 lx	1.15 m
60°	2 m	69 lx	2.31 m
	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	lluminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA












This product contains an aluminum die-cast front and a pure aluminum heat

sink,completes with powder coating; By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance;

A range of PC lens are available with different beam angles; Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.





DL-R3B0115 AW

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








 $7W\ LED\ 2700\mbox{K-}3000\mbox{K}\ /\ \mbox{excl.}\ 180\mbox{mA}\ LED\ \mbox{Driver}\ /\ 37\mbox{V}$



43,1	101	1397 Ix	0.46 m
60° X	2 m	349 lx	0.92 m
<i>*</i> \$4 <u>1</u> [3 m	155 lx	1.39 m
300	4 m	87 lx	1,85 m
140000	5 m	56 lx	2.31 m
	High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



	995 lx	0.65 m
60° 2 m	249 lx	1.30 m
3 m	111 lx	1.95 m
30° - √ 4 m	62 lx	2.60 m
5 m	40 lx	3.25 m
High	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43/	1 m	274 lx	1.15 m
60°	2 m	69 lx	2.31 m
PAL.	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	illuminance	Diameter








TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA AD0103












Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different


QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.







DL-R4B0003 AW DL-R4B0003 AS






















LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 320 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU}5.3$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \,\, 36^{\circ} \, \, / \,\, 3000 \, \text{K} \, / \,\, 810 \text{cd} \, / \,\, \text{CRI:} \, 80 \, / \,\, 40000 \text{hrs} \, \, / \,\, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 4000 \, \text{K} \, \, / \, \, 360 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$














The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.






DL-R4B0004 AW **DL-R4B0004** AS


















Max.100W / excl.Electronic Transformer / G53 / AC12V Max.100W / excl.Electronic Transformer / G53 / AC12V
























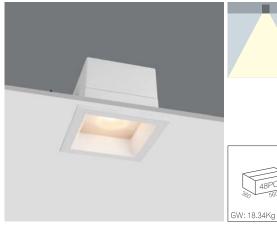




By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; A range of PC lens are available with different beam angles;

Clip installation and adjustable;

Suitable for use in areas like , hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.






DL-R3B0102 AW

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V







7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




43,/	100	995 Ix	0.65 m
60° × (//	2 m	249 lx	1.30 m
	3 m	111 lx	1.95 m
30°	4 m	62 lx	2,60 m
70000st	5 m	40 lx	3.25 m
	High	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V











TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA











GW: 9.7Kg


This product contains an aluminum die-cast front and a pure aluminum heat sink,completes with powder coating;

By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

A range of PC reflectors are available with different beam angles, all completing with high reflecting vacum plated finishing;

Clip installation and adjustable;

Suitable for use in areas like , hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.






DL-R3B0206 AW

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








15W LED 2700K-3000K / excl. 360mA LED Driver / 37V







15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



43/	1 (1)	647 lx	1.15 m
60°	2 m	162 lx	2.31 m
Y.A.L.	3 m	72 lx	3.46 m
30°	4 m	40 lx	4.62 m
Laged_	5 m	26 lx	5.77 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 15W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC lout: 350mA












By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance;

A range of PC lens are available with different beam angles;

Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.






DL-R3B0104 AW DL-R3B0104 NA **DL-R3B0104** MA

7W LED $2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $37\mbox{V}$ 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




43,	1 m	3112 lx	0.26 m
60° X	2 m	778 lx	0.53 m
PXII	3 m	346 lx	0.79 m
30	4 m	195 lx	1.05 m
320000	5 m	124 lx	1.32 m
	High	Illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $7W\ LED\ 2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}\ LED\ Driver$ / $37\mbox{V}$

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



	995 lx	0.65 m
60°	249 lx	1,30 m
3 m	111 lx	1.95 m
30° / 4 m	62 lx	2.60 m
-10000 5 m	40 lx	3.25 m
High	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



13/	100	274 lx	1.15 m
60°	2 m	69 lx	2.31 m
MI	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA

AD0103












By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

A range of PC reflectors are available with different beam angles, all completing with high reflecting vacum plated finishing;

Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.







DL-R3B0105 AW DL-R3B0105 NA **DL-R3B0105** MA

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



1-3.A.	1775 lx	0.65 m
60° 2 m	444 Ix	1.30 m
3 m	197 lx	1.95 m
30° 4 m	111 lx	2.60 m
18000 5 m	71 lx	3.25 m
High	illuminance	Diameter




15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



13	647 lx	1.15 m
60°	162 lx	2.31 m
3 m	72 lx	3.46 m
30° 4 m	40 lx	4.62 m
5 m	26 lx	5.77 m
High	illumina	ance Diameter







OSRAM LED Driver Pout: 15W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC Iout: 350mA












By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

A range of PC reflectors are available with different beam angles, all completing with high reflecting vacum plated finishing;

Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.






DL-R3B0205 AW DL-R3B0205 NA **DL-R3B0205** MA

30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V





	7099 lx	0.46 m
60°	1775 lx	0.92 m
3 m	789 lx	1.39 m
30° - \- 4 m	444 lx	1.85 m
-7/200cd 5 m	284 lx	2,31 m
High	illuminance	Diameter



30W LED 2700K-3000K / excl. 720mA LED Driver / 37V $30W\ LED\ 2700\mbox{K-}3000\mbox{K}$ / excl. $720\mbox{mA}\ LED\ Driver$ / $37\mbox{V}$ 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V









30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V $30W\ \text{LED}\ 2700\mbox{K-}3000\mbox{K}\ /\ \mbox{excl.}\ 720\mbox{mA}\ \mbox{LED}\ \mbox{Driver}\ /\ \ 37\mbox{V}$



13/	101	1378 lx	1.15 m
60°	2 m	345 lx	2.31 m
Y41.	3 m	153 lx	3,46 m
30°	4 m	86 lx	4.62 m
	5 m	55 lx	5.77 m
	High	Illuminance	Diameter







OSRAM LED Driver Pout: 30W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 500 / 600 / 700mA AD0165



TCI LED Driver Pout: 30W Uout: 46VDC Un: 110 ~ 240VAC lout: 700mA












By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; A range of PC lens are available with different beam angles;

Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.







DL-R3B0106 AW DL-R3B0106 NA **DL-R3B0106** MA

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED $2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $37\mbox{V}$ 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $7W\ LED\ 2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}\ LED\ Driver$ / $37\mbox{V}$



H-54,/	100	995 lx	0.65 m
60°	2 m	249 lx	1.30 m
PAL	3 m	111 lx	1.95 m
30	4 m	62 lx	2.60 m
10000	5 m	40 lx	3.25 m
	High	lluminance	Diameter



7W LED $\,2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $\,37\mbox{V}$ 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



13/	100	274 lx	1.15 m
60°	2 m	69 lx	2.31 m
PAL.	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
·	5 m	11 lx	5.77 m
	High	lluminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA












By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; A range of PC lens are available with different beam angles; Clip installation and adjustable;

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.





DL- R3B0107 AW **DL- R3B**0107 NA **DL- R3B**0107 MA

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43,	1 70	3112 lx	0.26 m
60°	2 m	778 Ix	0.53 m
ľX.II	3 m	346 lx	0.79 m
300	4 m	195 lx	1.05 m
3200cd	5 m	124 lx	1.32 m
	High	illuminance	Diameter



AW 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
NA 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
MA 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



__\\\\\\\\\\\\\\\\\\\\\\\\\\\\	1397 lx	0.46 m
60°	349 lx	0.92 m
3 m	155 lx	1.39 m
30° - /- 4 m	87 lx	1.85 m
400cb 5 m	56 lx	2,31 m
High	illuminance	Diameter




7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



1 ⇒,∧		995 Ix	0.65 m
60° × 2 m		249 lx	1.30 m
3 m		111 lx	1.95 m
30° - √- 4 m		62 lx	2.60 m
90000sL 5 m		40 lx	3.25 m
Higi	1	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
 A 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43/	100	274 lx	1.15 m
60°	2 m	69 lx	2.31 m
	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA












By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance;

A range of PC reflectors are available with different beam angles, all completing with high reflecting vacum plated finishing;

Clip installation.

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.






DL-R3B0199 AW **DL-R3B0199** AS

10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V









10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V








10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V



13/	1 _m	662 lx	1.15 m
60°	2 m	166 lx	2.31 m
MAL.	3 m	74 lx	3.46 m
30°	4 m	41 lx	4.62 m
Lagged	5 m	26 lx	5.77 m
	High	illuminance	Diameter








OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA











This product contains an aluminum die-cast front and a pure aluminum heat sink, completes with powder coating;
By using the new generation of CITIZEN COB LED chip, this product creates


By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

A range of PC reflectors are available with different beam angles, all completing with high reflecting vacum plated finishing;

Clip installation and adjustable;

IP54

Suitable for use in areas like, hotel, fancy stores, supermarket and etc. This product is in compliance with CE and RoHS directives.





DL-R3B0216 AW

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



2 m 853 lx 0.92 m 3 m 379 lx 1.39 m 4 m 213 lx 1.85 m 30° 450 5 m 136 lx 2.31 m	43,1	1 (2)	3411 lx	0.46 m
3m 213 lx 1.85 m 30° 4m 136 lx 2.31 m	^{60°} × 1	2 m	853 lx	0.92 m
30° 4 m 136 lx 2.31 m	~\/_[3 m	379 lx	1.39 m
- 3450p3 5 m	300	4 m	213 lx	1.85 m
High illuminance Diameter	345000	5 m	136 lx	2.31 m
		High	lluminance	Diameter




AW

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



A-3, A	1780 lx	0.65 m
60° 2 m	445 lx	1,30 m
3 m	198 lx	1,95 m
30° 4 m	111 lx	2.60 m
18000sL 5 m	71 lx	3.25 m
High	illuminance	Diameter



15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



43/	1 (n	647 lx	1.15 m
60°	2 m	162 lx	2.31 m
MI	3 m	72 lx	3.46 m
30°	4 m	40 lx	4.62 m
- Joed	5 m	26 lx	5.77 m
	High	illuminance	Diameter








TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC lout: 350mA






The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting; LED light source is used; the radiation angle is adjustable and electric

appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS






DL-R3B0001 AW **DL-R3B0001** AS



Max.3 x 1W 3000K-5000K / excl. 350mA LED Driver Max.3 x 1W 3000K-5000K / excl. 350mA LED Driver

626 lx 0.56	m
60° 2 m 157 lx 1.12	m
3 m 70 lx 1.68	m
39 lx 2.24	m
25 lx 2.80	m
High illuminance Diame	ter







NW: 0.5Kg



 \sqrt{F}

00000

30

68

25 ~ 25mm

Д7 106 x 106mm







DL-R3B0080 AW DL-R3B0080 AS

This product contains an aluminum die-cast front and heat sink, completes

with powder coating or oil painting finishing;
By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.

This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




一大力。	101	3112 lx	0.26 m
60° X	2 m	778 lx	0.53 m
PS///	3 m	346 lx	0.79 m
30°	4 m	195 lx	1.05 m
3200cd	5 m	124 lx	1.32 m
	High	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V









7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



101/	1 (1)	274 lx	1,15 m
60°	2 m	69 lx	2.31 m
MI	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
28000	5 m	11 lx	5.77 m
	High	lluminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA










This product contains an aluminum die-cast front and heat sink, completes with powder coating or oil painting finishing;
By using the new generation of CITIZEN COB LED chip,this product creates

extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.

This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.





DL-R3B0336 AW DL-R3B0336 AS

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V







10W LED 2700K-3000K / excl. 240mA LED Driver / 37V

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



13/	100	662 lx	1,15 m
60°	2 m	166 lx	2.31 m
MAL	3 m	74 lx	3.46 m
30°	4 m	41 lx	4.62 m
	5 m	26 lx	5.77 m
	High	lluminance	Diameter





OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA AD0164




TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA












Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.





DL-R4B0001 AS


DL-R4B0001 AW







Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V













LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3


 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 320 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU}5.3$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \,\, 36^{\circ} \, \, / \,\, 3000 \, \text{K} \, / \,\, 810 \text{cd} \, / \,\, \text{CRI:} \, 80 \, / \,\, 40000 \text{hrs} \, \, / \,\, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 4000 \, \text{K} \, \, / \, \, 360 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$














appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS






DL-R3B0002 AW **DL-R3B0002** AS



Max.2 x (3 x 1)W 3000K-5000K / excl. 350mA LED Driver $\mbox{Max.2}\,\mbox{x}\,(\mbox{3}\,\mbox{x}\,\mbox{1})\mbox{W}\,\,\mbox{3000K-5000K}\,\,/\,\,\mbox{excl.}\,\,\mbox{350mA}\,\,\mbox{LED}\,\,\mbox{Driver}$
















This product contains an aluminum die-cast front and heat sink, completes with powder coating or oil painting finishing;
By using the new generation of CITIZEN COB LED chip,this product creates

extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.

This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.






DL-R3B0081 AW **DL-R3B0081** AS

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V



一大艺、	1 m	3112 lx	0.26 m
60° X//	2 m	778 lx	0.53 m
PM.	3 m	346 lx	0.79 m
30°	4 m	195 lx	1.05 m
3200cd	5 m	124 lx	1.32 m
	High	Illuminance	Diameter
	_		




 $2\,\mathrm{x}\,7\mathrm{W}$ LED 2700K-3000K / excl. 180mA LED Driver / 37V $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V


1397 lx 0.46 m 349 lx 0,92 m 155 lx 1,39 m 87 Ix 1.85 m 56 lx 2.31 m



2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



101/	1 (1)	274 lx	1,15 m
60°	2 m	69 lx	2.31 m
MI	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
28000	5 m	11 lx	5.77 m
	High	lluminance	Diameter








TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA









8PCS

DL-R3B0337 AW **DL-R3B0337** AS

This product contains an aluminum die-cast front and heat sink, completes with powder coating or oil painting finishing; By using the new generation of CITIZEN COB LED chip,this product creates

extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.

This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V $2\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V



43,	1 (1)	4976 lx	0.26 m
60° X	2 m	1244 lx	0.53 m
PAJI	3 m	553 lx	0.79 m
30°	4 m	311 lx	1.05 m
500000	5 m	199 lx	1.32 m
	High	illuminance	Diameter
	High	illuminance	Diameter



 $2\,\mathrm{x}$ 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



- 	2377 lx	0.46 m
60° 2 m	594 lx	0.92 m
X	264 lx	1.39 m
30° 4 m	149 lx	1.85 m
240000 5 m	95 lx	2.31 m
High	illuminance	Diameter



2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



H-3,A	n	1215 lx	0.65 m
60°	m	304 lx	1.30 m
X	n	135 lx	1.95 m
30° 4 r	m	76 lx	2.60 m
2500s 5 r	m	49 lx	3,25 m
Hig	gh	luminance	Diameter



2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V

2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



143/	1 m	662 lx	1,15 m
60°	2 m	166 lx	2.31 m
PAL.	3 m	74 lx	3.46 m
30°	4 m	41 lx	4.62 m
	5 m	26 lx	5.77 m
	High	illuminance	Diameter







TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA



NW: 0.47Kg









DL-R4B0002 AS



adjustable and electric appliances are installed externally;

The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different QR-CB51 or LED QR-CB51 light source is used; the radiation angle is

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS



30


89






surface is treated by dusting:


standard.













111111

111111






LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 320 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU}5.3$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \,\, 36^{\circ} \, \, / \,\, 3000 \, \text{K} \, / \,\, 810 \text{cd} \, / \,\, \text{CRI:} \, 80 \, / \,\, 40000 \text{hrs} \, \, / \,\, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 4000 \, \text{K} \, \, / \, \, 360 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$














appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS






DL-R3B0003 AW **DL-R3B0003** AS



Max.3 x (3 x 1)W 3000K-5000K / excl. 350mA LED Driver $\mbox{Max.3} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K} \ / \mbox{ excl. 350mA LED Driver}$




















COB LED(CITIZEN)

This product contains an aluminum die-cast front and heat sink, completes

with powder coating or oil painting finishing; By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.


This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

DL-R3B0082 AW **DL-R3B0082** AS

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $3\,\mathrm{x}\,7\mathrm{W}$ LED 2700K-3000K / excl. 180mA LED Driver / $37\mathrm{V}$








 $3\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $3 \times 7 \text{W}$ LED 2700K-3000K / excl. 180mA LED Driver / 37V








 $3 \times 7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43/	1 (1)	274 lx	1,15 m
60° X	2 m	69 lx	2.31 m
MI	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
28000	5 m	11 lx	5.77 m
	High	Iluminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA





00000

00000

NW: 1.13Kg







COB LED(CITIZEN)

301

8

25 − 25mm

ДГ 303 x 106mm

DL-R3B0338 AW **DL-R3B0338** AS

This product contains an aluminum die-cast front and heat sink, completes with powder coating or oil painting finishing; By using the new generation of CITIZEN COB LED chip,this product creates


extreme low heat and offers an excellent lumen performance;

This product completes with high light transmittance PC lens, available with several different beam angles.

This product is with springs for recessed mounting.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.









 $3\,\mathrm{x}$ 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V







3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



143,/	1 (1)	1215 lx	0.65 m
60°	2 m	304 lx	1.30 m
PAL.	3 m	135 lx	1.95 m
30°	4 m	76 lx	2.60 m
125005	5 m	49 lx	3.25 m
	High	Illuminance	Diameter



3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V

 $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / $37\mathrm{V}$



A3A	71	662 lx	1.15 m
60°	m	166 lx	2.31 m
A	m	74 lx	3.46 m
30°	П	41 lx	4.62 m
509ed 51	m	26 lx	5,77 m
Hig	gh	lluminance	Diameter







OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA












Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different combinations;


QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS






DL- R4B0003 AW **DL- R4B0003** AS


















LED OR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \,\, 36^{\circ} \, \, / \,\, 3000 \text{K} \, / \,\, 810 \text{cd} \, / \,\, \text{CRI:} \, 80 \, / \,\, 40000 \text{hrs} \, \, / \,\, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 1640 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / $\, \text{GU}5.3$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



13,1	100	1531 lx	0.42 m
60° X	2 m	383 lx	0.86 m
PX/[[3 m	170 lx	1,30 m
30°	4 m	96 lx	1.72 m
/ _{550cd}	5 m	61 lx	2.15 m
	High	Illuminance	Diameter





The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-LP111 light source is used; the radiation angle is adjustable and electric

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS





5 ~ 25mm − 25mm

ДГ 169 х 165mm



QR-LP111(PHILIPS)

DL-R4B0004 AW **DL-R4B0004** AS







Max.75W / excl.Electronic Transformer / G53 / AC12V

surface is treated by dusting;

appliances are installed externally;


combinations:













Max.100W / excl.Electronic Transformer / G53 / AC12V Max.100W / excl.Electronic Transformer / G53 / AC12V




























The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting; Three optional parts, honeycomb net, fully toughened frosted glass and clear

glass, are available, and users can choose different parts to form different

QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

DL- R4B0005 AW **DL- R4B0005** AS

















Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V Max.2 x 100W / excl. Electronic Transformer / G53 / AC12V

0.85 m

1,30 m

1.72 m


2.15 m

333 lx
































DL-R4B0006 AW







Max.3 x 75W $\,/\,$ excl.Electronic Transformer $\,/\,$ G53 $\,/\,$ AC12V

surface is treated by dusting;

appliances are installed externally;

standard.


The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the


Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different QR-LP111 light source is used; the radiation angle is adjustable and electric


It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS













Max.3 \times 100W / excl.Electronic Transformer / G53 / AC12V Max.3 x 100W / excl.Electronic Transformer / G53 / AC12V


0.14 m


45127 lx





13	1,01	8332 lx	0.43 m
60°	2 m	2083 Ix	0.85 m
PXII.	3 m	926 lx	1.30 m
300	4 m	521 lx	1.72 m
9500gd	5 m	333 lx	2.15 m
	High	illuminance	Diamete












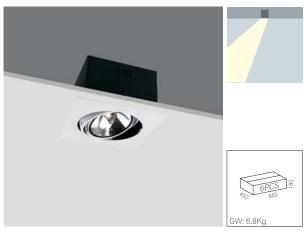

The lamp body and face cover are made of iron, the surface is treated by dusting.
QR-LP111 light source is used; the radiation angle is adjustable and electric

appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS

 $\overline{\mathbb{F}}$ NW: 0.95Kg **25mm** 5 ~ 25mm **Д**7 170 х 165mm













Max.75W / excl.Electronic Transformer / G53 / AC12V











Max.100W / excl.Electronic Transformer / G53 / AC12V Max.100W / excl.Electronic Transformer / G53 / AC12V

0.81 m

1.62 m


2.44 m


3.25 m


4.06 m illuminance Diameter
























The lamp body and face cover are made of iron, the surface is treated by dusting.

HIR-CE111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS





DL- R5B0080 AW **DL- R5B0080** AS





Max.35W / excl. Electronic Ballast / Gx8.5













Max.70W / excl. Electronic Ballast / Gx8.5 Max.70W / excl. Electronic Ballast / Gx8.5
























‴ 5 ~ 25mm

Д7 330 х 170mm

OR-LP111(PHILIPS)

DL-R4B0103 AW **DL-R4B0103** AS






322 lx

appliances are installed externally;


standard.




Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V

The lamp body and face cover are made of iron, the surface is treated by $\operatorname{QR-LP111}$ light source is used; the radiation angle is adjustable and electric

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS








Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V
























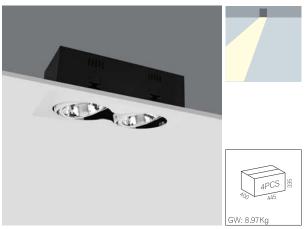





HIR-CE111(PHILIPS)

DL- R5B0052 AW **DL- R5B0052** AS








Max.2 x 35W / excl. Electronic Ballast / Gx8.5 Max.2 x 35W / excl. Electronic Ballast / Gx8.5


The lamp body and face cover are made of iron, the surface is treated by HIR-CE111 light source is used; the radiation angle is adjustable and electric

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS




appliances are installed externally;

standard.











Max.2 x 70W / excl. Electronic Ballast / Gx8.5 Max.2 x 70W / excl. Electronic Ballast / Gx8.5



























The lamp body and face cover are made of iron, the surface is treated by

dusting. QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment to solutable on holes, department solutes, various rainchines solves, garments stores, superfine goods stores, art galleries, entertainment places, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS


NW: 2.03Kg **25mm** 5 ~ 25mm ДГ7 485 x 170mm





DL-R4B0104 AW **DL-R4B0104** AS


















Max.3 x 100W / excl. Electronic Transformer / G53 / AC12V Max.3 x 100W / excl.Electronic Transformer / G53 / AC12V







illuminanc


296 lx

107 lx


2.44 m 3.25 m

4.06 m illuminance Diameter













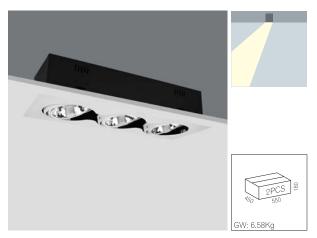

The lamp body and face cover are made of iron, the surface is treated by dusting.

HIR-CE111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS





DL-R5B0053 AW **DL-R5B0053** AS






Max.3 x 35W / excl. Electronic Ballast / Gx8.5

















Max.3 x 70W / excl. Electronic Ballast / Gx8.5 Max.3 x 70W / excl. Electronic Ballast / Gx8.5























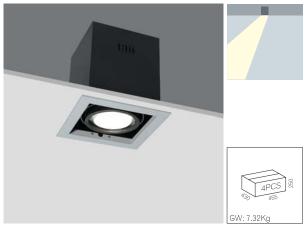

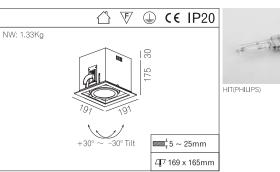

The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different


HIT light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.

DL-R5B0001 AW DL-R5B0001 AS

Max.70W 7300lm / excl. Electronic Ballast / G12 Max.70W 7300lm / excl. Electronic Ballast / G12










747 lx

2.19 m












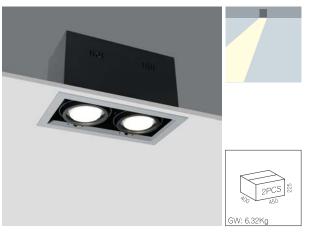









Max.2 x 70W 7300Im / excl. Electronic Ballast / G12

appliances are installed externally;

standard.











The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting; Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different HIT light source is used; the radiation angle is adjustable and electric

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS


























DL-R5B0003 AW **DL-R5B0003** AS







The face cover, inner ring and outer ring are made of pure aluminum and $% \left(1\right) =\left(1\right) \left(1\right)$ shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;


Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

HIT light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.


 $\mbox{Max.3} \times \mbox{70W}$ 7300lm / excl. Electronic Ballast / G12 Max.3 x 70W 7300lm / excl. Electronic Ballast / G12


















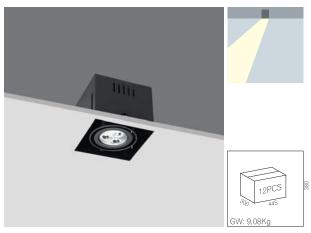

The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting; LED light source is used; the radiation angle is adjustable and electric

appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS






DL-R3B0004 AW DL-R3B0004 AB



Max.3 x 1W 3000K-5000K / excl. 350mA LED Driver Max.3 x 1W 3000K-5000K / excl. 350mA LED Driver














This product contains a pure aluminum body, aluminum die-cast heat sink and front; completes with powder coating or oil painting finishing;
By using the new generation of CITIZEN LED chip, this product creates extreme

By using the new generation of CITIZEN LED chip, this product creates extreme low heat and offers an excellent lumen performance.

This product completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.






DL-R3B0348 AW **DL-R3B0348** AS

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








W

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



- \ -\-\-__\	2377 lx	0.46 m
60°	594 lx	0.92 m
	264 lx	1.39 m
30° / 4 m	149 lx	1.85 m
2400c0 5 m	95 lx	2.31 m
High	lluminance	Diameter



A.C.

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




H3,	1215 lx	0.65 m
60° 2 m	304 lx	1.30 m
3 m	135 lx	1.95 m
30° - 4 m	76 lx	2.60 m
12500b 5 m	49 lx	3.25 m
High	lluminance	Diameter



AW

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V











TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA








The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different combinations;

QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;


It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS





DL-R4B0007 AW **DL-R4B0007** AS







Max.50W / excl. Electronic Transformer / GU5.3 / AC12V













LED OR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3


7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3


7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 1640 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3
















DL-R3B0005 AW **DL-R3B0005** AS



LED light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment

The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS

 $\label{eq:max2} \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{W} \mbox{ 3000K-5000K / excl. 350mA LED Driver} \\ \mbox{Max.2} \times (3 \times 1) \mbox{Max.2} \times (3 \times 1) \mbox{Max.2} \\ \mbox{Max.2} \times (3 \times 1) \mbox{Max.2} \times (3 \times 1) \mbox{Max.2} \\ \mbox{Max.2} \times (3 \times 1) \mbox{Ma$


43.	100	626 lx	0.56 m
60°	2 m	157 lx	1.12 m
<u>*</u> **/_[3 m	70 lx	1,68 m
30°	4 m	39 lx	2.24 m
650cd	5 m	25 lx	2.80 m
	High	illuminance	Diameter


surface is treated by dusting;











Д7 209 x 104mm

DL-R3B0349 AW **DL-R3B0349** AS

By using the new generation of CITIZEN LED chip, this product creates extreme $\,$ low heat and offers an excellent lumen performance.

front; completes with powder coating or oil painting finishing;


This product completes with high light transmittance PC lens, available with several different beam angles.

This product contains a pure aluminum body, aluminum die-cast heat sink and

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

 $2\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V 2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








 $2\,\mathrm{x}\,10\mathrm{W}$ LED 2700K-3000K / excl. 240mA LED Driver / 37V $2\,\mathrm{x}\,10\mathrm{W}$ LED 2700K-3000K / excl. 240mA LED Driver / 37V




1-53/	1 m	1215 lx	0.65 m
60°	2 m	304 lx	1.30 m
~ 1	3 m	135 lx	1.95 m
30°	4 m	76 lx	2.60 m
92500N	5 m	49 lx	3.25 m
	High	illuminance	Diameter
	-		



 $2\,\mathrm{x}\,10\mathrm{W}$ LED $\,2700\mathrm{K}\text{-}3000\mathrm{K}$ / excl. 240mA LED Driver / $\,37\mathrm{V}$ $2\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V









OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA










The face cover, inner ring and outer ring are made of aluminium alloy and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting:

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different


QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.







DL-R4B0008 AW DL-R4B0008 AS



















LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 60^{\circ} \,$ / $\, 2700 \text{K} \, / \, \, 320 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3


7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W}\,/\,60^\circ$ / $4000 \text{K}\,/\,360 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3




43,/	1 m	1531 Ix	0.42 m
60° X []	2 m	383 lx	0.86 m
184.[[]	3 m	170 lx	1,30 m
30°	4 m	96 lx	1.72 m
1550cd	5 m	61 lx	2.15 m
	High	Huminance	Diameter










LED light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS





DL- R3B0006 AW **DL- R3B0006** AS



 $\text{Max.3} \times (3 \times 1) \text{W} \ 3000 \text{K-5000K} \ / \ \text{excl.} \ 350 \text{mA LED Driver}$ Max.3 x (3 x 1)W 3000K-5000K / excl. 350mA LED Driver
















This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme

low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated, a range of PC reflectors are available with different interchangable beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.






DL-R3B0350 AW DL-R3B0350 AS

3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V




一大学,」	100	4976 Ix	0.26 m
60° X	2 m	1244 lx	0.53 m
PXII	3 m	553 lx	0.79 m
30°	4 m	311 lx	1.05 m
5000cd	5 m	199 lx	1.32 m
	High	illuminance	Diameter



 $3\,\mathrm{x}$ 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V








3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / 37V








3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V

3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V










OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA








Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-CB51 or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.






DL-R4B0009 AW **DL-**R4B0009







Max.3 x 50W / excl. Electronic Transformer / GU5.3 / AC12V


















LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 320 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$


7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 3000 \text{K} \, / \, \, 810 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W}\,/\,60^{\circ}$ / $4000 \text{K}\,/\,360 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3
















DL-R4B0010 AW **DL-R4B0010** AS










Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different


QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;


It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.


Max.75W / excl.Electronic Transformer / G53 / AC12V Max.75W / excl.Electronic Transformer / G53 / AC12V


一大马、	1 _m	28978 lx	0.14 m
60°	2 m	7245 lx	0.28 m
<u>~~.[]</u>	3 m	3220 lx	0.42 m
30°	4 m	1811 Ix	0.56 m
29000cd	5 m	1159 Ix	0.70 m
	High	illuminance	Diameter
	N	E4.47 L.	0.42 m












Max.100W / excl.Electronic Transformer / G53 / AC12V Max.100W / excl.Electronic Transformer / G53 / AC12V










8332 lx


0.43 m















The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS standard.


NW: 1.69Kg 30 **5 ∼ 25mm** 5 **25mm** ДГ 330 x 164mm





DL- R4B0011 AW **DL**- R4B0011



Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V Max.2 x 75W $\,/\,$ excl.Electronic Transformer $\,/\,$ G53 $\,/\,$ AC12V















 $Max.2 \times 100W$ / excl.Electronic Transformer / G53 / AC12V Max.2 x 100W / excl.Electronic Transformer / G53 / AC12V

0.14 m































DL- R4B0012 AW **DL- R4B0012** AS

 $\mbox{Max.3} \times 75\mbox{W}$ / excl. Electronic Tran sformer / G53 / AC12V Max.3 \times 75W / excl.Electronic Transformer / G53 / AC12V

The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

QR-LP111 light source is used; the radiation angle is adjustable and electric

It is suitable for hotels, department stores, various franchise stores, garment $% \left(1\right) =\left(1\right) \left(1\right) \left$ stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS








surface is treated by dusting;

appliances are installed externally;

combinations;
















Max.3 x 100W $\,/\,$ excl.Electronic Transformer $\,/\,$ G53 $\,/\,$ AC12V Max.3 x 100W / excl.Electronic Transformer / G53 / AC12V






















 \sqrt{F}

30

NW: 1.62Kg

C€ IP20

25 5 ~ 25mm

Д7 164 х 164mm







COB LED(CITIZEN)

DL- R3B0123 AW **DL- R3B0123** AS

15W LED 2700K-3000K / excl 360mA LED Driver / 37V

low heat and offers an excellent lumen performance.

CE and RoHS in compliance and approved.

different beam angles.


This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme


The reflector of product is made of pure aluminum and chrome plated, completes with high light transmittance PC lens, available with several

Suitable for use in areas like hotels, restaurants, department stores, homes etc.

15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








15W LED 2700K-3000K / excl. 360mA LED Driver / 37V


15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V




43,/	1 (1)	1780 lx	0.65 m
60° X	2 m	445 lx	1.30 m
M	3 m	198 lx	1,95 m
30°	4 m	111 lx	2.60 m
18000	5 m	71 lx	3.25 m
	High	Illuminance	Diameter



15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V











TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC lout: 350mA







This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing;

By using the new generation of CITIZEN LED chip, this product creates extreme low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated,completes with high light transmittance PC lens, available with several different beam angles.


Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

DL- R3B0351 AW **DL- R3B0351** AS

20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V



人 动。	1 m	14766 lx	0.17 m
60°	2 m	3692 lx	0.35 m
PX.[]	3 m	1461 lx	0.50 m
30°	4 m	923 lx	0.67 m
1,4800cd	5 m	591 lx	0.85 m
	High	illuminance	Diameter



20W LED 2700K-3000K / excl. 480mA LED Driver / 37V

20W LED 2700K-3000K / excl. 480mA LED Driver / 37V



20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V




143,1	1 kn	5076 Ix	0.42 m
60°	2 m	1269 Ix	0.86 m
PAI	3 m	564 lx	1.30 m
30 /	4 m	317 lx	1.72 m
5400ca	5 m	203 lx	2,15 m
	High	Illuminance	Diameter



20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V



H3, 1	2546 lx	0.57 m
60° 2 m	637 lx	1.15 m
3 m	283 lx	1.95 m
30° 4 m	159 lx	2.47 m
26000s 5 m	102 lx	3.16 m
High	illuminance	Diameter



20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V



	m	1028 lx	1.15 m
60°	m	257 lx	2.31 m
X/1 31	m	114 lx	3.46 m
30°	m	64 lx	4.62 m
9089cd 5	m	41 lx	5.77 m
Hi	gh	lluminance	Diameter







TCI LED Driver Pout: 20W Uout: 45VDC Un: 110 ~ 240VAC Iout: 500mA



The face cover and the lamp base are made of aluminum alloy and is molded

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS

through die-casting, the surface is treated by dusting.

This product has adjusting functions; QPAR16 or LED QPAR16 light source is used.

stores, homes, etc.

standard.







DL- R4A0010 AW **DL- R4A0010** AS **DL- R4A0010** WH

Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz








7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 2700K / 450cd / CRI: 80 / 40000hrs / GU10


7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 3000K / 500cd / CRI: 80 / 40000hrs / GU10

7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10
















QPAR16(PHILIPS)



LED QPAR16(PHILIPS)







ДГ 330 x 164mm

DL- R3B0124 AW **DL- R3B0124** AS


This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing;
By using the new generation of CITIZEN LED chip, this product creates extreme low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated, completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

 $2\times15W$ LED 2700K-3000K / excl. 360mA LED Driver / 37V $2\times15W$ LED 2700K-3000K / excl. 360mA LED Driver / 37V









AW 2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V AS 2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V



2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V







2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V




13,	1780 lx	0.65 m
60° 2 m	445 lx	1.30 m
3 m	198 lx	1,95 m
30° - /- 4 m	111 lx	2.60 m
2000 5 m	71 lx	3.25 m
High	illuminance	Diameter



2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 2 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V









OSRAM LED Driver Pout: 15W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC lout: 350mA





−30° Tilt

25mm ± 5 ~ 25mm ДГ 330 x 164mm



COB LED(CITIZEN)

DL- R3B0352 AW **DL-** R3B0352

This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme


low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated,completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

2 x 20W LED 2700K-3000K / excl, 480mA LED Driver / 37V $2\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V








 $2\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V $2\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V



2 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 2 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V








2 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 2 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V




103, 1	2546 lx	0.57 m
60° 2 m	637 lx	1,15 m
3 m	283 Ix	1.95 m
30° / 4 m	159 lx	2.47 m
26000 5 m	102 lx	3.16 m
High	illuminance	Diameter



2 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V $2\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V









NW: 2.61Kg

OSRAM LED Driver Pout: 30W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 500 / 600 / 700mA AD0165



TCI LED Driver Pout: 20W Uout: 45VDC Un: 110 ~ 240VAC lout: 500mA

AD0101







DL- R3B0355 AW **DL- R3B0355** AS

This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme

low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated,completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V $2\times30W$ LED 2700K-3000K / excl. 720mA LED Driver / 37V



一大方。	1 m	15876 lx	0.17 m
60°	2 m	3969 lx	0.35 m
PYI	3 m	1764 lx	0.50 m
30°	4 m	992 lx	0.67 m
1,6000cd	5 m	635 lx	0.85 m
	High	illuminance	Diameter





 $2\,\mathrm{x}\,30\mathrm{W}$ LED 2700K-3000K / excl. 720mA LED Driver / 37V $2\times30W$ LED 2700K-3000K / excl. 720mA LED Driver / 37V



2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V







2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V




	3097 lx	0.57 m
60°	774 lx	1.15 m
3 m	344 lx	1.95 m
30° - / 4 m	194 lx	2.47 m
\$1500sL 5 m	124 lx	3.16 m
High	illuminance	Diameter



2 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V $2\times30W$ LED 2700K-3000K / excl. 720mA LED Driver / 37V









OSRAM LED Driver Pout: 30W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 500 / 600 / 700mA

AD0165



TCI LED Driver Pout: 30W Uout: 46VDC Un: 110 ~ 240VAC lout: 700mA









This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing;


By using the new generation of CITIZEN LED chip, this product creates extreme low heat and offers an excellent lumen performance.


The reflector of product is made of pure aluminum and chrome plated, completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

DL-R3B0125 AW $3\times15W$ LED 2700K-3000K / excl. 360mA LED Driver / 37V **DL-R3B0125** AS 3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








 $3\,\mathrm{x}\,15\mathrm{W}$ LED 2700K-3000K / excl. 360mA LED Driver / 37V $3\times15\text{W}$ LED 2700K-3000K / excl. 360mA LED Driver / 37V



3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V








3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V




	1780 lx	0.65 m
60°	445 lx	1.30 m
3 m	198 lx	1.95 m
30° - / 4 m	111 lx	2.60 m
/8000x 5 m	71 lx	3.25 m
High	illuminance	Diameter



3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V 3 x 15W LED 2700K-3000K / excl. 360mA LED Driver / 37V











TCI LED Driver Pout: 15W Uout: 43VDC Un: 100 ~ 240VAC lout: 350mA









DL-R3B0353 AS

This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme

low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated, completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

DL-R3B0353 AW 3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V $3\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V



一大艺、	1 _m	14766 lx	0.17 m
60° X//	2 m	3692 lx	0.35 m
Y.U	3 m	1461 lx	0.50 m
30°	4 m	923 lx	0.67 m
1,4800cd	5 m	591 lx	0.85 m
	High	illuminance	Diameter




 $3\,\mathrm{x}\,20\mathrm{W}$ LED 2700K-3000K / excl. 480mA LED Driver / $37\mathrm{V}$ $3 \times 20 \text{W}$ LED 2700K-3000K / excl. 480mA LED Driver / 37V



3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V







3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V 3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V



13,/	1 m	2546 lx	0.57 m
60° × 4	2 m	637 lx	1.15 m
$\times 1$	3 m	283 lx	1.95 m
30°	4 m	159 Ix	2.47 m
26000	5 m	102 lx	3.16 m
	High	Iluminance	Diameter



3 x 20W LED 2700K-3000K / excl. 480mA LED Driver / 37V $3\times20W$ LED 2700K-3000K / excl. 480mA LED Driver / 37V



43/	1 _m	1028 lx	1.15 m
30°	2 m	257 lx	2.31 m
	3 m	114 lx	3.46 m
	4 m	64 Ix	4.62 m
	5 m	41 lx	5.77 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 30W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 500 / 600 / 700mA



TCI LED Driver Pout: 20W Uout: 45VDC Un: 110 ~ 240VAC lout: 500mA







25 − 25mm ДГ 482 x 164mm

-30° Tilt

DL-R3B0356 AW **DL-**R3B0356

This product contains a pure aluminum body, aluminum die-cast heat sink and outer ring; completes with powder coating or oil painting finishing; By using the new generation of CITIZEN LED chip, this product creates extreme


low heat and offers an excellent lumen performance.

The reflector of product is made of pure aluminum and chrome plated, completes with high light transmittance PC lens, available with several different beam angles.

Suitable for use in areas like hotels, restaurants, department stores, homes etc. CE and RoHS in compliance and approved.

3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V $3\times30W$ LED 2700K-3000K / excl. 720mA LED Driver / 37V







 $3\,\mathrm{x}\,30\mathrm{W}$ LED 2700K-3000K / excl. 720mA LED Driver / $37\mathrm{V}$ $3\times30W$ LED 2700K-3000K / excl. 720mA LED Driver / 37V



3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V







3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V



13,	3097 lx	0.57 m
60° 2 m	774 lx	1.15 m
3 m	344 lx	1.95 m
30° - 4 m	194 lx	2,47 m
\$1500×L5 m	124 lx	3.16 m
High	illuminance	Diameter



3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V 3 x 30W LED 2700K-3000K / excl. 720mA LED Driver / 37V



43/	1 m	1378 lx	1.15 m
60°	2 m	345 lx	2.31 m
	3 m	153 lx	3,46 m
30°	4 m	86 lx	4.62 m
1409cd	5 m	55 lx	5.77 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 30W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 500 / 600 / 700mA AD0165



TCI LED Driver Pout: 30W Uout: 46VDC Un: 110 ~ 240VAC lout: 700mA



NW: 0.24Kg









QT12(PHILIPS)

‴ 5 ~ 25mm **Д**7 76 x 76mm

DL- R4B0029 AW **DL- R4B0029** AS **DL- R4B0029** WH



Max.50W / excl. Electronic Transformer / GY6.35 / AC12V Max.50W / excl. Electronic Transformer / GY6.35 / AC12V Max.50W / excl. Electronic Transformer / GY6.35 / AC12V

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V


The main body are made of aluminium alloy or stainaless steel and molded

There are several finishing available, such as texture white, matt white, texture

A specular aluminium reflector is provided. The fully frosted glass helps to achieve the effect of anti-flog and anti-UV. QT12 or QR-CB51 or LED QR-CB51 light source is used,electric appliances are

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS



through die-casting.

silver,nickle brush.


installed externally.

stores, homes, etc.

QR-CB51(PHILIPS)























7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 60^{\circ} \,$ / $\, 3000 \text{K} \, / \, \, 341 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3

 $7 \, \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \, \text{K} \,$ / $\, 1640 \, \text{cd}$ / CRI: 80 / $\, 40000 \, \text{hrs}$ / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 $7 \text{W} \, / \, \, 60^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 360 \text{cd}$ / CRI: $80 \, / \, \, 40000 \text{hrs}$ / GU5.3



-t-3, An	1531 lx	0.42 m
60°	383 lx	0.86 m
3 m	170 lx	1.30 m
30° - √- 4 m	96 lx	1.72 m
/550cd 5 m	61 lx	2,15 m
High	illuminance	Diameter







NW: 0.31Kg







25 5 ~ 25mm **₽** 83mm

DL- R3B0236 AW **DL- R3B0236** AS **DL- R3B0236** WH 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

through die-casting, the surface is treated by dusting.

This product has fixing function;

stores, homes, etc.

standard.


The face cover and the lamp base are made of aluminum alloy and is molded

This product is CE certified and all materials are in conformity with RoHS

COB LED light source is used, electric appliances are installed externally. It is suitable for various franchise stores, garment stores, superfine goods





43,	100	3112 lx	0.26 m
600 XXII	2 m	778 lx	0.53 m
PAII	3 m	346 lx	0.79 m
300	4 m	195 lx	1,05 m
\$200ca	5 m	124 lx	1.32 m
	High	illuminance	Diameter



7W LED $2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $37\mbox{V}$ 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



153,/	1\m	995 lx	0.65 m
60°	2 m	249 lx	1,30 m
PAL	3 m	111 lx	1.95 m
30"	4 m	62 lx	2.60 m
10000	5 m	40 lx	3.25 m
	High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



H3/	274 lx	1,15 m
60° 2 m	69 lx	2.31 m
3 m	30 lx	3.46 m
30° 4 m	17 lx	4.62 m
5 m	11 lx	5,77 m
High	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA









The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has fixing function;

COB LED light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS

NW: 0.31Kg **5 ~ 25mm** − 25mm **₽** 83mm



DL- R3B0236 AW **DL- R3B0236** AS **DL- R3B0236** WH

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $7W\ LED\ 2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}\ LED\ Driver$ / $37\mbox{V}$ 7W LED $2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $37\mbox{V}$



A		
	3112 lx	0.26 m
60° 2 m	778 lx	0.53 m
X / / / 3 m	346 lx	0.79 m
30° 4 m	195 lx	1.05 m
\$200cd 5 m	124 lx	1.32 m
High	illuminance	Diameter




7W LED $2700\mbox{K-}3000\mbox{K}$ / excl. $180\mbox{mA}$ LED Driver / $37\mbox{V}$

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



H.3,1	1 m	1397 lx	0.46 m
60"	2 m	349 lx	0.92 m
PAJE	3 m	155 lx	1.39 m
300	4 m	87 lx	1.85 m
	5 m	56 lx	2.31 m
	High	Illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



13,	995 lx	0.65 m
60° 2 m	249 lx	1.30 m
3 m	111 lx	1.95 m
30° - 4 m	62 lx	2.60 m
70000 5 m	40 lx	3.25 m
High	illuminance	Diameter




7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



	100	274 lx	1.15 m
60° X//	2 m	69 lx	2.31 m
M	3 m	30 lx	3.46 m
30 4	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
1	High	lluminance	Diameter







ES LED Driver Pout: 7W Uout: 30 ~ 40VDC Un: 100 ~ 240VAC Iout: 180mA AD0169

TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA









DL- R3B0237 AW

DL- R3B0237 AS

DL- R3B0237 WH

The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has fixing function;


COB LED light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS standard.

10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V







10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V








10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V



H3,/	1 km	1215 lx	0.65 m
60°	2 m	304 lx	1.30 m
	3 m	135 lx	1.95 m
30°	4 m	76 lx	2.60 m
1250ch 5	5 m	49 lx	3.25 m
H	High	uminance	Diameter



10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V 10W LED 2700K-3000K / excl. 300mA LED Driver / 37V



43/	1 m	662 lx	1,15 m
60°	2 m	166 lx	2.31 m
MI.	3 m	74 lx	3.46 m
300	4 m	41 lx	4.62 m
	5 m	26 lx	5.77 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 290 / 350 / 420mA



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA










The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has adjusting functions;

QR-CB51 or LED QR-CB51 light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.






DL- R4B0030 AS **DL- R4B0030** WH


DL- R4B0030 AW Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V





一大大	100	13086 lx	0.17 m
60° X	2 m	3272 lx	0.35 m
Y.L	3 m	1457 Ix	0.52 m
300	4 m	818 lx	0.70 m
1900Qcd	5 m	523 lx	0.87 m
	High	illuminance	Diameter













LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 3000 \, \text{K} \, \, / \, \, 810 \, \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \, \text{hrs} \, \, / \, \, \, \, \text{GU5.3}$ $7 \text{W} \, / \, \, 60^{\circ} \,$ / $\, 3000 \text{K} \, / \, \, 341 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3

 $7 \text{W}\,/\,\,24^\circ\,$ / $4000 \text{K}\,$ / $\,1640 \text{cd}\,$ / CRI: 80 / $\,40000 \text{hrs}\,$ / $\,GU5.3$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



- 	1531 Ix	0.42 m
60°	383 Ix	0.86 m
3 m	170 lx	1.30 m
30° - /- 4 m	96 lx	1,72 m
/550cd 5 m	61 Ix	2.15 m
High	illuminance	Diameter







 $0^{\circ}\sim 30^{\circ}$ Tilt

NW: 0.26Kg










⊕ C€ IP20

25 − 25mm **₽** 83mm

DL- R4A0002 AW **DL- R4A0002** AS **DL- R4A0002** WH









LED QPAR16(PHILIPS)

7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10

The face cover and the lamp base are made of aluminum alloy and is molded

It is suitable for various franchise stores, garment stores, superfine goods This product is CE certified and all materials are in conformity with RoHS

through die-casting, the surface is treated by dusting.

This product has adjusting functions; QPAR16 or LED QPAR16 light source is used.

standard.


 $7 \text{W} \, / \, \, 40^{\circ} \, \, / \, \, 2700 \text{K} \, / \, \, 450 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU10}$

7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 $7 \text{W} \, / \, \, 40^{\circ} \,$ / $\, 3000 \text{K} \, / \, \, 500 \text{cd}$ / CRI: $80 \, / \, \, 40000 \text{hrs}$ / GU10


7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10















NW: 0.27Kg



30° Tilt

\$3mm







DL- R3B0240 AW **DL- R3B0240** AS

DL- R3B0240 WH

The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has adjusting functions;

COB LED light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.:

This product is CE certified and all materials are in conformity with RoHS standard.

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
7W LED 2700K-3000K / excl. 180mA LED Driver / 37V
7W LED 2700K-3000K / excl. 180mA LED Driver / 27V

3112 lx

778 lx

346 lx

195 lx

124 lx

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V






W 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

AS 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V






W 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

/H 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



- -	995 lx	0.65 m
60°	249 lx	1.30 m
3 m	111 lx	1.95 m
30° - / 4 m	62 lx	2.60 m
70000N 5 m	40 lx	3.25 m
High	illuminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



-	274 lx	1.15 m
60°	69 lx	2.31 m
3 m	30 lx	3,46 m
30° 4 m	17 lx	4.62 m
289ed 5 m	11 lx	5.77 m
High	illuminance	Diameter









TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA









DL- R3B0241 WH

DL- R3B0241 AW

DL- R3B0241 AS

The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has adjusting functions;

COB LED light source is used, electric appliances are installed externally.


It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS standard.

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




一大学。	1 m	4976 lx	0.26 m
60° × ()	2 m	1244 lx	0.53 m
图料	3 m	553 Ix	0.79 m
30°	4 m	311 lx	1.05 m
500000	5 m	199 lx	1.32 m
	High	illuminance	Diameter



10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




人 [3,]	1 (1)	2377 lx	0.46 m
60° × / [2 m	594 lx	0.92 m
~\.[3 m	264 lx	1.39 m
300	4 m	149 lx	1.85 m
24000	5 m	95 lx	2.31 m
	High	Illuminance	Diameter



10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



1215 Ix 0.65 m 304 lx 1,30 m 135 lx 1.95 m 76 lx 2.60 m 49 Ix 3.25 m



10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



43/	1 m	662 lx	1.15 m
60°	2 m	166 lx	2.31 m
	3 m	74 lx	3.46 m
30°	4 m	41 lx	4.62 m
	5 m	26 lx	5.77 m
	High	Illuminance	Diameter





OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC lout: 290 / 350 / 420mA AD0164




TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC lout: 290mA












The face cover and the lamp base are made of aluminum alloy and is molded

through die-casting, the surface is treated by dusting.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.

This product is CE certified and all materials are in conformity with RoHS standard.






LED QPAR16(PHILIPS)


DL- R4A0004 AS DL- R4A0004 WH

DL- R4A0004 AW



Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz







7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 2700K / 450cd / CRI: 80 / 40000hrs / GU10

7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 3000K / 500cd / CRI: 80 / 40000hrs / GU10

7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10















 $0^{\circ}\sim 30^{\circ}$ Tilt

NW: 0.16Kg








QPAR16(PHILIPS


25 5 ~ 25mm **₽** 83mm

DL- R4A0004 AW Max.50W / GU10 / 230V~50Hz **DL- R4A0004** AS DL- R4A0004 WH



Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz





LED QPAR16(PHILIPS)

7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 2700K / 450cd / CRI: 80 / 40000hrs / GU10

The face cover and the lamp base are made of aluminum alloy and is molded

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS

through die-casting, the surface is treated by dusting.

This product has adjusting functions; QPAR16 or LED QPAR16 light source is used.


stores, homes, etc.;

standard.

7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 3000K / 500cd / CRI: 80 / 40000hrs / GU10


7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10

























This product has adjusting functions;

COB LED light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.

This product is CE certified and all materials are in conformity with RoHS standard.





DL- R3B0396 AW **DL- R3B0396** AS **DL- R3B0396** WH

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




43,	1 m	3112 lx	0.26 m
60° X	2 m	778 lx	0.53 m
PXII	3 m	346 lx	0.79 m
300	4 m	195 lx	1.05 m
\$20000	5 m	124 lx	1.32 m
	High	illuminance	Diameter




7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



H-13,/	1 (n	995 lx	0.65 m
60°	2 m	249 lx	1.30 m
	3 m	111 lx	1.95 m
30°	4 m	62 lx	2.60 m
10000	5 m	40 lx	3.25 m
	High	Illuminance	Diameter




7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V













TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA

AD0103









DL- R3B0400 AS **DL- R3B0400** WH

The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting.

This product has adjusting functions;

COB LED light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




43.A	4976 lx	0.26 m
60°	1244 lx	0.53 m
3 m	553 lx	0.79 m
30° - /- 4 m	311 lx	1.05 m
5000cd 5 m	199 lx	1.32 m
High	illuminance	Diameter



10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V








10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



-1-3,1	1215 lx	0.65 m
60°	304 lx	1.30 m
3 m	135 lx	1.95 m
30° / 4 m	76 lx	2.60 m
/250cs 5 m	49 lx	3.25 m
High	luminance	Diameter



10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



	X n	662 lx	1.15 m
60°	m	166 lx	2.31 m
^/	m	74 lx	3.46 m
30° -\4	m	41 lx	4.62 m
688ed_5	m	26 lx	5.77 m
Hi	gh	lluminance	Diameter







TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA












This product has adjusting functions;

QR-CB51 or LED QR-CB51 light source is used, electric appliances are installed externally.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.








DL- R4B0038 AW **DL- R4B0038** AS **DL- R4B0038** WH


Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V


















LED OR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 60^{\circ} \, / \, \, 2700 \text{K} \, / \, \, 320 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, / \, \, \text{GU5.3}$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 3000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: $80 \, / \, \, 40000 \text{hrs}$ / GU5.3 $7 \text{W}\,/\,60^{\circ}$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \text{W}\,/\,\,24^\circ\,$ / $4000 \text{K}\,$ / $\,1640 \text{cd}\,$ / CRI: 80 / $\,40000 \text{hrs}\,$ / $\,GU5.3$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3














The face cover and the lamp base are made of aluminum alloy and is molded through die-casting, the surface is treated by dusting. This product has adjusting functions;

QPAR16 or LED QPAR16 light source is used.

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.


This product is CE certified and all materials are in conformity with RoHS standard.






LED QPAR16(PHILIPS)

DL- R4A0010 AW **DL- R4A0010** AS DL- R4A0010 WH







7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10 $7 \text{W} \, / \, \, 40^{\circ} \, \, / \, \, 2700 \text{K} \, / \, \, 450 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU10}$

7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 $7 \text{W} \, / \, \, 40^{\circ} \,$ / $\, 3000 \text{K} \, / \, \, 500 \text{cd}$ / CRI: $80 \, / \, \, 40000 \text{hrs}$ / GU10

7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10


3.64 m






















The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines;


The surface is varnished after brushing;

The radiation angle is adjustable;

QR-CB51, LED QR-CB51 or COB LED light source is used, the electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.






DL- R3B0258 AW **DL- R3B0258** AS **DL- R3B0258** BV

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



151	1 _m	995 lx	0.65 m
60°	2 m	249 lx	1.30 m
PAL.	3 m	111 lx	1.95 m
30° A	4 m	62 lx	2.60 m
10000st	5 m	40 lx	3.25 m
	High	Illuminance	Diameter





DL- R4B0076 AW **DL- R4B0076** AS **DL- R4B0076** BV

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

4389 Ix


1097 lx

488 Ix 275 lx 0.43 m

0.85 m 1,23 m

1.55 m


















LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W}\,/\,60^\circ$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \text{W}\,/\,\,24^\circ$ / $4000 \text{K}\,/\,\,1640 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 4000 \text{K} \, / \, \, 810 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$ 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



ES LED Driver Pout: 7W Uout: 30 ~ 40VDC Un: 100 ~ 240VAC Iout: 180mA



TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA AD0103



	1531 lx	0.42 m
60° 2 m	383 Ix	0.86 m
3 m	170 lx	1.30 m
30° / 4 m	96 lx	1.72 m
550cd 5 m	61 lx	2.15 m
High	illuminance	Diameter












The face cover and the lamp base are made of aluminum alloy and molded through die-casting, the surface is treated by dusting.

The radiation angle is adjustable;

QR-CB51, LED QR-CB51 or COB LED light source is used, the electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.

This product is CE certified and all materials are in conformity with RoHS standard.





DL- R3B0257 AW **DL- R3B0257** AS

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




DL- R4B0091 AW **DL-R4B0091** AS **DL-R4B0091** BV

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V Max.50W / excl. Electronic Transformer / GU5.3 / AC12V






















LED QR-CB51(PHILIPS)

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 2700 \text{K} \,$ / $\, 1450 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3









TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA

AD0103



NW: 0.31Kg



 $\overline{\mathbb{A}}$

30

120

0° ~ 30° Tilt

⊕ C€ IP20

25mm 5 ~ 25mm **₽** 83mm








DL- R4A0025 AW **DL- R4A0025** AS DL- R4A0025 WH

Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz Max.50W / GU10 / 230V~50Hz







QPAR16(PHILIPS

LED QPAR16(PHILIPS)

66 lx 1.95 m 2.60 m

7W / 25° / 2700K / 1050cd / CRI: 80 / 40000hrs / GU10

24 lx

7W / 25° / 3000K / 1200cd / CRI: 80 / 40000hrs / GU10 $7 \text{W} \, / \, \, 40^{\circ} \, \, / \, \, 3000 \text{K} \, / \, \, 500 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU10}$

7W / 40° / 2700K / 450cd / CRI: 80 / 40000hrs / GU10

3.25 m

The face cover and the lamp base are made of aluminum alloy and molded

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS

through die-casting, the surface is treated by dusting.

The radiation angle is adjustable; QPAR16 or LED QPAR16 light source is used;

stores, homes, etc.;


7W / 25° / 4000K / 1200cd / CRI: 80 / 40000hrs / GU10 7W / 40° / 4000K / 500cd / CRI: 80 / 40000hrs / GU10


























DL- R4A0024 AW **DL- R4A0024** AS **DL- R4A0024** WH Max.20W / GU10 / 230V~50Hz

The lamp body is made of pure aluminum and molded through spinning forming, the face cover is made of aluminum alloy and molded through diecasting; the surface is treated by dusting.

HIR-CE111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.

Max.20W / GU10 / 230V~50Hz Max.20W / GU10 / 230V~50Hz










The lamp body is made of pure aluminum and molded through spinning forming, the face cover is made of aluminum alloy and molded through diecasting; the surface is treated by dusting.

QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

0.14 m





DL- R4B0090 AW **DL- R4B0090** AS **DL- R4B0090** WH


Max.75W / excl.Electronic Transformer / G53 / AC12V Max.75W / excl.Electronic Transformer / G53 / AC12V Max.75W / excl.Electronic Transformer / G53 / AC12V


















Max.100W / excl.Electronic Transformer / G53 / AC12V Max.100W / excl.Electronic Transformer / G53 / AC12V




























The lamp body is made of pure aluminum and molded through spinning forming, the face cover is made of aluminum alloy and molded through diecasting; the surface is treated by dusting.


HIR-CE111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

0.14 m

0.28 m







DL- R5B0031 AW Max.35W / excl.Electronic Ballast / Gx8.5 **DL- R5B0031** AS Max.35W / excl.Electronic Ballast / Gx8.5 **DL- R5B0031** WH Max.35W / excl.Electronic Ballast / Gx8.5































DL- R3B0093 AW

DL- R3B0093 AS

COB LED(CITIZEN)

The lamp body is made of pure aluminum and shaped by CNC machine. The surface is varnished after brushing.


All luminaires use Citizen.COB LED with high CRI.

The radiation angle is adjustable and electric appliances are installed externally.

It is suitable for hotels,department stores,various franchise stores,garment stores,superfine goods stores,art galleries,entertainment places,homes,etc. This product is CE certified and all materials are in conformity with RoHS standard.

7W LED 3000K-5000K / excl. 180mA LED Driver / 37V 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V








7W LED 3000K-5000K / excl. 180mA LED Driver / 37V 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V








7W LED 3000K-5000K / excl. 180mA LED Driver / 37V 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V




	995 lx	0.65 m
60°	249 lx	1.30 m
3 m	111 lx	1.95 m
30° - 4 m	62 lx	2.60 m
9000cd 5 m	40 lx	3.25 m
	illuminance	Diameter



7W LED 3000K-5000K / excl. 180mA LED Driver / 37V 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V











TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA









This product is made of pure aluminium and the surface is varnished after brushing;

A built-in GU5.3 ceramic lamp base is used QR-CB51 or LED QR-CB51 are available; the electric appliances are installed externally;

The angle of the inner ring and the outer ring are adjustable;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.








QR-CB51(PHILIPS)


























LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 3000 \, \text{K} \, / \, \, 341 \text{cd} \, \, / \, \, \, \text{CRI:} \, 80 \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \, \text{GU5.3}$

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3













47 168 x 88mm



COB LED(CITIZEN)

The lamp body is made of pure aluminum and shaped by CNC machine. The surface is varnished after brushing.


All luminaires use Citizen.COB LED with high CRI.

The radiation angle is adjustable and electric appliances are installed externally.

It is suitable for hotels,department stores,various franchise stores,garment stores,superfine goods stores,art galleries,entertainment places,homes,etc. This product is CE certified and all materials are in conformity with RoHS standard.

DL- R3B0094 BV 2 x 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V








 $2 \times 7 \text{W}$ LED 3000K-5000K / excl. 180mA LED Driver / 37V









2 x 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V







2 x 7W LED 3000K-5000K / excl. 180mA LED Driver / 37V



13/	ļn	274 lx	1,15 m
60° / 2	m	69 lx	2.31 m
	m	30 lx	3.46 m
30° 4	m	17 lx	4.62 m
28004_5	m	11 lx	5.77 m
H	iah	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA














A built-in GU5.3 ceramic lamp base is used QR-CB51 or LED QR-CB51 are available; the electric appliances are installed externally;

The angle of the inner ring and the outer ring are adjustable;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.





DL- R4B0023 BV





0.43 m

0.85 m

Max.2 x 50W / excl. Electronic Transformer / GU5.3 / AC12V








4389 Ix

1097 Ix









LED QR-CB51(PHILIPS)

 $7 \, \text{W} \, / \, \, 24^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 1450 \text{cd} \, \, / \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$ 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3


 $7 \text{W}\,/\,60^{\circ}$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 810 \text{cd}$ / $\, \text{CRI:} \, 80$ / $\, 40000 \text{hrs}$ / $\, \text{GU5.3}$


7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



43,1	1 m	1531 Ix	0.42 m
60°	2 m	383 lx	0.86 m
<i> </i>	3 m	170 lx	1.30 m
30°	4 m	96 lx	1,72 m
/ _{550cd}	5 m	61 lx	2.15 m
	High	illuminance	Diameter








The main body parts are made of aluminium and then shaped by CNC

machines; the surface is varnished after brushing; LED light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods

stores, homes, etc.;
This product is CE certified and all materials are in conformity with RoHS





DL- R3B0010 BV 3 x 1W / excl. 350mA LED Driver












The main body parts are made of aluminium and then shaped by CNC machines; the surface is varnished after brushing: LED light source is used; the radiation angle is adjustable and electric

appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is $\overrightarrow{\text{CE}}$ certified and all materials are in conformity with RoHS standard.





DL-R3B0011 BV 2 x (3 x 1)W / excl. 350mA LED Driver








The main body parts are made of aluminium and then shaped by CNC machines; the surface is varnished after brushing; LED light source is used; the radiation angle is adjustable and electric

appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.;

This product is CE certified and all materials are in conformity with RoHS standard.





DL- R3B0012 BV 3 x (3 x 1)W / excl. 350mA LED Driver











Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc.

extreme low heat and offers an excellent lumen performance;

This product is in compliance with CE and RoHS directives.

Clip installation;

This product contains an aluminum front and a pure aluminum heat sink, completes with powder coating or oil painting finishing:
By using the new generation of CITIZEN COB LED chip,this product creates



⊕ C€ IP20 NW: 0.35Kg 0°_~ 30° Tilt 22 **25mm** 5 ~ 25mm $0^{\circ} \sim 358^{\circ}$ Horizontally

₽ 83mm




COB LED(CITIZEN)

DL-R3B0096 BV

7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V








7W LED 2700K-3000K / excl. 180mA LED Driver / 37V












TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA

AD0103






This product contains an aluminum front and a pure aluminum heat sink, completes with powder coating or oil painting finishing;

By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.







DL- R3B0390 BV

10W LED 2700K-3000K / excl. 240mA LED Driver / 37V









10W LED 2700K-3000K / excl. 240mA LED Driver / 37V









10W LED 2700K-3000K / excl. 240mA LED Driver / 37V







10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



13/	1 kn	662 lx	1,15 m
60°	2 m	166 lx	2.31 m
	3 m	74 lx	3.46 m
30°	4 m	41 lx	4.62 m
	5 m	26 lx	5.77 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 10W Uout: 27 ~ 54VDC Un: 220 ~ 240VAC Iout: 290 / 350 / 420mA AD0164



TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA










This product contains an aluminum front and a pure aluminum heat sink,completes with powder coating or oil painting finishing; By using the new generation of CITIZEN COB LED chip,this product creates extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like , hotel, fancy stores,theatre,gallery and etc. This product is in compliance with CE and RoHS directives.





DL- R3B0097 BV

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V




大学。	1 m	3112 lx	0.26 m
60° X []	2 m	778 lx	0.53 m
Y.J.	3 m	346 lx	0.79 m
300	4 m	195 lx	1.05 m
\$200cd	5 m	124 lx	1,32 m
	High	illuminance	Diameter



 $2\,x\,7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V




13,	1397 Ix	0.46 m
60° / 2 m	349 lx	0.92 m
3 m	155 lx	1.39 m
30° - √- 4 m	87 lx	1,85 m
400cd 5 m	56 lx	2.31 m
High	illuminance	Diameter



2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



43/	100	995 Ix	0.65 m
60° × //	2 m	249 Ix	1.30 m
<u>/</u> ///	3 m	111 lx	1,95 m
30°	4 m	62 lx	2.60 m
100000	5 m	40 lx	3.25 m
	High	illuminance	Diameter



2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



13/	1 m	274 lx	1.15 m
60° ×	2 m	69 lx	2.31 m
MI	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA










This product contains an aluminum front and a pure aluminum heat sink, completes with powder coating or oil painting finishing;

By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like , hotel, fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.





DL- R3B0391 BV

2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




大沙 。」	1 _m	4976 lx	0.26 m
60°	2 m	1244 lx	0.53 m
PX#	3 m	553 lx	0.79 m
300	4 m	311 lx	1.05 m
\$000cd	5 m	199 lx	1.32 m
	High	illuminance	Diameter



2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




43,1	1 m	2377 lx	0.46 m
60°	2 m	594 lx	0.92 m
PXII	3 m	264 lx	1,39 m
300	4 m	149 lx	1.85 m
24000	5 m	95 lx	2.31 m
	High	illuminance	Diameter



2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



-1-3,A	1215 lx	0.65 m
60° 2 m	304 lx	1,30 m
3 m	135 lx	1.95 m
30° 4 m	76 lx	2.60 m
1250cs 5 m	49 lx	3.25 m
High	illuminance	Diameter



2 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



H3/	1\m	662 lx	1,15 m
60°	2 m	166 lx	2.31 m
PAL	3 m	74 lx	3.46 m
300	4 m	41 lx	4.62 m
L Daed	5 m	26 lx	5.77 m
	High	i l uminance	Diameter








TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA












QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS standard.

Max.2 x 50W / excl. Electronic Transformer / GU5.3 / AC12V





QR-CB51(PHILIPS)

DL- R4B0020 BV


















LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



143,1	1 m	1531 lx	0.42 m
60°	2 m	383 lx	0.86 m
PXII	3 m	170 lx	1,30 m
30°	4 m	96 lx	1.72 m
1550cd	5 m	61 lx	2.15 m
	High	Huminanca	Diameter











This product contains an aluminum front and a pure aluminum heat sink, completes with powder coating or oil painting finishing;
By using the new generation of CITIZEN COB LED chip,this product creates

By using the new generation of CITIZEN COB LED chip, this product created extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like , hotel, fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.

NW: 0.62Kg 0° ~ 30° Tilt 0° ~ 3x ≠83 80 80 80

 $0^{\circ} \sim 358^{\circ}$ Horizontally

≠5 ~ 25mm

3 x 🗣 83mm



DL- R3B0392 BV

 $3\times10W$ LED 2700K-3000K / excl. 240mA LED Driver / $37\mathrm{V}$




	4976 lx	0.26 m
60° 2 m	1244 lx	0.53 m
	553 lx	0.79 m
30° / 4 m	311 lx	1.05 m
5000cd 5 m	199 lx	1.32 m
High	illuminance	Diameter



BV 3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V




	2377 lx	0.46 m
60°	594 lx	0.92 m
3 m	264 Ix	1.39 m
30° 4 m	149 lx	1.85 m
2400pd 5 m	95 lx	2.31 m
High	illuminance	Diameter



BV 3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



13,	1215 lx	0.65 m
60° 2 m	304 lx	1,30 m
3 _m	135 lx	1.95 m
30° - 4 m	76 lx	2.60 m
2500s 5 m	49 lx	3.25 m
High	lluminance	Diameter



3 x 10W LED 2700K-3000K / excl. 240mA LED Driver / 37V



	662 lx	1,15 m
60°	166 lx	2,31 m
3 m	74 lx	3.46 m
30° - 4 m	41 lx	4.62 m
5 m	26 lx	5.77 m
High	illuminance	Diameter








TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA












QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.

This product is CE certified and all materials are in conformity with ${\sf RoHS}$ standard.



₽ 83mm



DL-R4B0019 BV







Max.50W / excl. Electronic Transformer / GU5.3 / AC12V








4389 lx









LED QR-CB51(PHILIPS)

 $7 \text{W} \, / \, \, 24^{\circ} \, \, / \, \, 2700 \text{K} \, \, / \, \, 1450 \text{cd} \, \, / \, \, \text{CRI:} \, 80 \, \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$ $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 2700 \text{K} \, / \, \, 763 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$


7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 4000 \, \text{K} \, \, / \, \, 360 \, \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \, \text{hrs} \, \, / \, \, \, \, \, \text{GU5.3}$



-t-3, A.	1531 lx	0.42 m
60°	383 lx	0.86 m
3 m	170 lx	1.30 m
30° - /- 4 m	96 lx	1.72 m
/550co 5 m	61 lx	2.15 m
High	illuminance	Diameter















QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS standard.















Max.2 x 50W / excl. Electronic Transformer / GU5.3 / AC12V













LED QR-CB51(PHILIPS)

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 2700 \text{K} \,$ / $\, 1450 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 3000 \, \text{K} \, / \, \, 341 \text{cd} \, \, / \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$

 $7 \, \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \, \text{K} \,$ / $\, 1640 \, \text{cd}$ / CRI: 80 / $\, 40000 \, \text{hrs}$ / $\, \text{GU}5.3$ $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



143,/	1 m	1531 lx	0.42 m
60°	2 m	383 lx	0.86 m
PXIII	3 m	170 lx	1.30 m
30°	4 m	96 lx	1.72 m
4550cd	5 m	61 lx	2.15 m
	High	Huminance	Diameter








3 x 🗣 83mm

The main body parts are made of aluminium and then shaped by CNC machines; the surface is varnished after brushing;

QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with ${\sf RoHS}$ standard.





DL- R4B0021 BV Max.3 x 50W / excl. Electronic Transformer / GU5.3 / AC12V

13086 Jx

3272 lx

1457 Ix


523 Ix

0.17 m


0.35 m

0.52 m 0.70 m


0.87 m
















LED QR-CB51(PHILIPS)

 $7 \, \text{W} \, / \, \, 24^{\circ} \, / \, \, 2700 \, \text{K} \, / \, \, 1450 \text{cd} \, / \, \, \text{CRI:} \, \, 80 \, / \, \, 40000 \text{hrs} \, / \, \, \text{GU5.3}$ 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3


7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 60^{\circ} \,$ / $3000 \text{K} \, / \, \, 341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \text{W} \, / \,\, 24^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 1640 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 4000 \text{K} \, / \, \, 810 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



43,/	100	1531 Ix	0.42 m
60°	2 m	383 lx	0.86 m
Ž(J)	3 m	170 lx	1.30 m
30 - 1	4 m	96 lx	1.72 m
/550cd	5 m	61 lx	2.15 m
	High	illuminance	Diameter












This product is made of pure aluminium and the surface is varnished after brushing:

A built-in GU5.3 ceramic lamp base is used and QR-CB51 or LED QR-CB51 light source should be used; the electric appliances are installed externally; The angle of the inner ring is adjustable;

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.





QR-CB51(PHILIPS)

DL-R4B0072 BV









Max.2 x 50W / excl. Electronic Transformer / GU5.3 / AC12V















7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 320 \, \text{cd} \, \, / \, \, \, \text{CRI:} \, 80 \, \, / \, \, \, 40000 \, \text{hrs} \, \, / \, \, \, \, \text{GU5.3}$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \,\, 36^{\circ} \, \, / \,\, 3000 \text{K} \, / \,\, 810 \text{cd} \, / \,\, \text{CRI:} \, 80 \, / \,\, 40000 \text{hrs} \, \, / \,\, \text{GU5.3}$ $7 \text{W}\,/\,60^\circ$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \, \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \, \text{K} \,$ / $\, 1640 \, \text{cd}$ / CRI: 80 / $\, 40000 \, \text{hrs}$ / $\, \text{GU} 5.3$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3
















This product is made of pure aluminium and the surface is varnished after brushing;

A built-in GU5.3 ceramic lamp base is used and QR-CB51 or LED QR-CB51 light source should be used; the electric appliances are installed externally; The angle of the inner ring is adjustable;

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS standard.





QR-CB51(PHILIPS)

DL- R4B0073 BV














Max.3 x 50W / excl. Electronic Transformer / GU5.3 / AC12V

















LED OR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 3000 \text{K} \,$ / $\, 810 \text{cd}$ / $\, \text{CRI:} \, 80$ / $\, 40000 \text{hrs}$ / $\, \text{GU5.3}$ 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

 $7 \text{W} \, / \,\, 24^{\circ} \,$ / $4000 \text{K} \,$ / 1640 cd / CRI: 80 / 40000 hrs / GU5.37W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3















The face cover, inner ring and outer ring are made of pure aluminum and shaped by extrusion; the main body box is made of cold rolled sheet; the surface is treated by dusting;

Three optional parts, honeycomb net, fully toughened frosted glass and clear glass, are available, and users can choose different parts to form different

combinations;
QR-LP111 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, entertainment places, homes, etc.; This product is CE certified and all materials are in conformity with RoHS

Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V


Max.2 x 75W / excl.Electronic Transformer / G53 / AC12V

0.14 m

C€ IP20 NW: 2.09Kg 30 2 **‴** 5 ~ 25mm ДГ 335 x 165mm



DL- R4B0005 AW **DL- R4B0005** AS




















 $Max.2 \times 100W$ / excl.Electronic Transformer / G53 / AC12V $Max.2 \times 100W$ / excl. Electronic Transformer / G53 / AC12V



























This product is made of iron and formed by punching, welding and fine machining; the surface is treated by dusting;

QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods


This product is CE certified and all materials are in conformity with RoHS standard.





DL- R4B0065 AW **DL- R4B0065** AS


























LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \,\, 36^{\circ} \,\, / \,\, 3000 \, \text{K} \,\, / \,\, 810 \text{cd} \,\, / \,\, \text{CRI:} \,\, 80 \,\, / \,\, 40000 \text{hrs} \,\, / \,\, \text{GU5.3}$


 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 3000 \, \text{K} \, / \, \, 341 \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \, \text{GU5.3}$

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 1640 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / $\, \text{GU}5.3$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3

7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



153,1	100	1531 lx	0.42 m
60°	2 m	383 lx	0.86 m
	3 m	170 lx	1.30 m
300	4 m	96 lx	1.72 m
1550cd	.5 m	61 lx	2.15 m
	High	illuminance	Diameter











This product is made of iron and formed by punching, welding and fine machining; the surface is treated by dusting;

QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle is adjustable and electric appliances are installed externally;

It is suitable for various franchise stores, garment stores, superfine goods stores, homes, etc.

This product is CE certified and all materials are in conformity with RoHS standard.

Max.2 x 50W / excl. Electronic Transformer / GU5.3 / AC12V

Max.2 \times 50W / excl. Electronic Transformer / GU5.3 / AC12V


818 lx

523 Ix

0.52 m

0.70 m

0.87 m






DL- R4B0066 AW **DL- R4B0066** AS

















LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3


 $7 \, \text{W} \, / \, \, 60^{\circ} \,$ / $\, 2700 \, \text{K} \,$ / $\, 320 \, \text{cd}$ / $\, \text{CRI:} \, 80$ / $\, 40000 \, \text{hrs}$ / $\, \text{GU5.3}$

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 3000 \text{K} \,$ / $\, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 $7 \text{W}\,/\,60^{\circ}$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



- 	1531 lx	0.42 m
60°	383 lx	0.86 m
3 m	170 lx	1.30 m
30° - /- 4 m	96 lx	1.72 m
/550cd 5 m	61 lx	2.15 m
High	illuminance	Diameter
















DL- R4B0067 AW **DL- R4B0067** AS









This product is made of iron and formed by punching, welding and fine

QR-CB51 light source or LED QR-CB51 light source is used; the radiation angle

It is suitable for various franchise stores, garment stores, superfine goods

This product is CE certified and all materials are in conformity with RoHS

machining; the surface is treated by dusting;

stores, homes, etc.

standard.


is adjustable and electric appliances are installed externally;




1097 lx

488 Ix

0.85 m









LED QR-CB51(PHILIPS)

7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3


 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 3000 \, \text{K} \, \, / \, \, 341 \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \, \text{hrs} \, \, / \, \, \, \, \, \text{GU5.3}$

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3


7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



143,/	1 m	1531 lx	0.42 m
60°	2 m	383 Ix	0.86 m
	3 m	170 lx	1.30 m
30°	4 m	96 lx	1,72 m
/550cd	5 m	61 lx	2.15 m
	High	Illuminanca	Diameter













Clip installation; Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc.

sink, completes with powder coating or oil painting finishing;


extreme low heat and offers an excellent lumen performance;

This product is in compliance with CE and RoHS directives.

This product contains an aluminum die-cast front and a pure aluminum heat

By using the new generation of SHARP COB LED chip, this product creates







DL- R3B0142 WH

DL- R3B0142 AW

9W LED 2700K-3000K / excl. 250mA LED Driver / 37V 9W LED 2700K-3000K / excl. 250mA LED Driver / 37V 9W LED 2700K-3000K / excl. 250mA LED Driver / 37V




43,1	100	2244 lx	0.46 m
60° X	2 m	561 lx	0.92 m
PSAID	3 m	249 lx	1,39 m
30°	4 m	140 lx	1.85 m
23000	5 m	90 lx	2.31 m
	High	lluminance	Diameter



9W LED 2700K-3000K / excl. 250mA LED Driver / 37V 9W LED 2700K-3000K / excl. 250mA LED Driver / 37V 9W LED 2700K-3000K / excl. 250mA LED Driver / 37V



13,/	1 kn	848 lx	0.73 m
60"	2 m	212 lx	1,46 m
	3 m	94 lx	2.18 m
30°	4 m	53 lx	2.91 m
1800	5 m	34 lx	3.64 m
	High	illuminance	Diameter





OSRAM LED Driver Pout: 10W
Uout: 27 ~ 54VDC
Un: 220 ~ 240VAC
lout: 290 / 350 / 420mA AD0164




TCI LED Driver Pout: 10W Uout: 43VDC Un: 100 ~ 240VAC Iout: 290mA













DL- R3B0315 AW **DL- R3B0315** AS **DL- R3B0315** WH

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $2\,\mathrm{x}\,7\mathrm{W}$ LED 2700K-3000K / excl. 180mA LED Driver / 37V $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

The main body is made of steel and a pure aluminum heat sink, completes with powder coating or oil painting finishing: By using the new generation of CITIZEN COB LED chip,this product creates


Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc.

extreme low heat and offers an excellent lumen performance;

This product is in compliance with CE and RoHS directives.

Clip installation;







 $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



-\-_\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	1397 lx	0.46 m
60°	349 lx	0.92 m
3 m	155 lx	1.39 m
30° / 4 m	87 lx	1.85 m
400c 5 m	56 Ix	2,31 m
High	illuminance	Diameter




2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

 $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



454/	1 m	995 lx	0.65 m
60° X	2 m	249 lx	1.30 m
Y.L.	3 m	111 lx	1.95 m
30°	4 m	62 lx	2.60 m
10000	5 m	40 lx	3.25 m
	High	Illuminance	Diameter



2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

2 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

 $2\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V



45/	1 m	274 lx	1.15 m
60° X	2 m	69 lx	2.31 m
ř#L	3 m	30 lx	3.46 m
30°	4 m	17 lx	4.62 m
	5 m	11 lx	5.77 m
	High	illuminance	Diameter







TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC lout: 180mA










The main body is made of steel and a pure aluminum heat sink, completes with powder coating or oil painting finishing;

By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.





DL- R3B0317 AW **DL- R3B0317** AS DL-R3B0317 WH

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V 3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V $3\,x\,7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V




→	y n	3112 lx	0.26 m
60°	m	778 lx	0.53 m
X	m	346 lx	0,79 m
30°	m	195 lx	1.05 m
3200cd 5	m	124 lx	1.32 m
Hi	gh	illuminance	Diameter




 $3\,\mathrm{x}\,7\mathrm{W}$ LED 2700K-3000K / excl. 180mA LED Driver / $37\mathrm{V}$ 3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V







3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

 $3\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V

 $3\times7W$ LED 2700K-3000K / excl. 180mA LED Driver / 37V



人 动,/	100	995 lx	0,65 m
60°	2 m	249 lx	1.30 m
$\triangle L$	3 m	111 lx	1.95 m
30°	4 m	62 lx	2.60 m
100001	5 m	40 lx	3,25 m
	High	i l uminance	Diameter




3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V

3 x 7W LED 2700K-3000K / excl. 180mA LED Driver / 37V












TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA






The lamp body is made of pure aluminum and molded through extrusion, and then shaped by CNC machines; the aluminium surface is varnished after

QR-CB35 or LED QR-CB35 light source is used and the electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, homes,

This product is CE certified and all materials are in conformity with RoHS standard.












Max.35W / excl. Electronic Transformer / G4 / AC12V

4W / 24° / 2700K / 580cd / CRI: 80 / 25000hrs / G4 4W / 24° / 4000K / 700cd / CRI: 80 / 25000hrs / G4































This product contains an aluminum front and a pure aluminum heat sink, the aluminum surface is varnished after brushing:
By using the new generation of CITIZEN COB LED chip,this product creates

extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like • hotel• fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.

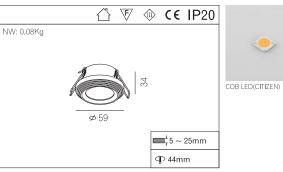



DL- R3B0264 BV

3W LED 2700K-3000K / excl. 300mA LED Driver / 9V



人 动,/	1 m	568 lx	0.50 m
60° X / [2 m	142 lx	1.00 m
$^{\wedge}\!\!\times\!$	3 m	63 lx	1,50 m
300	4 m	36 lx	2.00 m
6000	5 m	23 lx	2.50 m
	High	illuminance	Diameter



3W LED 2700K-3000K / excl. 300mA LED Driver / 9V




13,	424 Ix	0.81 m
60° 2 m	106 lx	1.62 m
3 m	47 Ix	2.44 m
30° 4 m	27 Ix	3.25 m
450cd 5 m	17 lx	4.06 m
High	illuminance	Diameter












The lamp body is made of pure aluminum and molded through extrusion, and then shaped by CNC machines; the aluminium surface is varnished after

QR-CB51 or LED QR-CB51 light source is used and the electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, homes,

This product is CE certified and all materials are in conformity with RoHS standard.











Max.50W / excl. Electronic Transformer / GU5.3 / AC12V













LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \,$ / $\, 3000 \, \text{K} \,$ / $\, 341 \, \text{cd}$ / $\, \text{CRI:} \, 80$ / $\, 40000 \, \text{hrs}$ / $\, \text{GU5.3}$


 $7 \, \text{W} \, / \, \, 24^{\circ} \, \, / \, \, 4000 \, \text{K} \, \, / \, \, 1640 \, \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \, \text{hrs} \, \, / \, \, \, \, \, \text{GU5.3}$ 7W / 36° / 4000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



13,/	101	1531 Ix	0.42 m
60° X []	2 m	383 lx	0.86 m
PYJ[3 m	170 lx	1.30 m
300	4 m	96 lx	1.72 m
1550cd	5 m	61 lx	2.15 m
	High	Huminonon	Diamotor







The lamp body is made of pure aluminum and molded through extrusion, and then shaped by CNC machines; the aluminium surface is varnished after

QR-CB51 or LED QR-CB51 light source is used and the electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

NW: 0.1Kg 92 **5 ~ 25mm** − 25mm **₽** 65mm



QR-CB51(PHILIPS)

DL- R4B0054 BV







Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

0.17 m


13086 lx














LED QR-CB51(PHILIPS)

 $7 \text{W} \, / \, \, 24^{\circ} \, \, / \, \, 2700 \text{K} \, \, / \, \, 1450 \text{cd} \, \, / \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$ 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 4000 \text{K} \, / \, \, 810 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$ 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3











This product contains an aluminum front and a pure aluminum heat sink, the aluminum surface is varnished after brushing; By using the new generation of CITIZEN COB LED chip,this product creates

extreme low heat and offers an excellent lumen performance; Clip installation;

Suitable for use in areas like • hotel • fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.





DL- R3B0271 BV






14	<u> </u>	01101	0.00
	1\m	3112 lx	0.26 m
60"	2 m	778 lx	0.53 m
^{.1	3 m	346 lx	0.79 m
30"	4 m	195 lx	1.05 m
3200cd	5 m	124 lx	1.32 m
	High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



	1397 lx	0.46 m
60°	349 lx	0.92 m
3 m	155 lx	1.39 m
30° 4 m	87 lx	1.85 m
400cd 5 m	56 lx	2.31 m
High	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



- -	m	995 lx	0.65 m
60°	2 m	249 lx	1.30 m
	3 m	111 lx	1.95 m
300	ł m	62 lx	2.60 m
100000 5	i m	40 lx	3,25 m
H	ligh	lluminance	Diameter



7W LED 2700K-3000K / excl. 180mA LED Driver / 37V



143/	100	274 lx	1.15 m
600 X/	2 m	69 lx	2.31 m
MAII.	3 m	30 lx	3.46 m
300	4 m	17 lx	4.62 m
28000	5 m	11 lx	5.77 m
1	High	lluminance	Diameter








TCI LED Driver Pout: 7W Uout: 36.6VDC Un: 100 ~ 240VAC Iout: 180mA






The lamp body is made of pure aluminum and molded through extrusion, and then shaped by CNC machines; the aluminium surface is varnished after

QR-CB51 or LED QR-CB51 light source is used and the electric appliances are installed externally;

It is suitable for hotels, department stores, various franchise stores, homes,

This product is CE certified and all materials are in conformity with RoHS standard.













Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

0.17 m

0.35 m


13086 lx


3272 lx













LED QR-CB51(PHILIPS)


 $7 \, \text{W} \, / \, \, 24^{\circ} \,$ / $\, 2700 \, \text{K} \,$ / $\, 1450 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \,$ / $\, 3000 \, \text{K} \,$ / $\, 341 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \, \text{K} \,$ / $\, 810 \, \text{cd}$ / $\, \text{CRI:} \, 80$ / $\, 40000 \, \text{hrs}$ / $\, \text{GU5.3}$ 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3




H-3.M	1531 lx	0.42 m
60° 2 m	383 lx	0.86 m
3 m	170 lx	1,30 m
30° - / 4 m	96 Ix	1.72 m
4550cd 5 m	61 lx	2.15 m
High	illuminance	Diameter









QR-CB51 or LED QR-CB51 light source is used and the electric appliances are installed externally;


It is suitable for hotels, department stores, various franchise stores, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

0.17 m


13086 lx

























LED QR-CB51(PHILIPS)


7W / 24° / 2700K / 1450cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 3000K / 341cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 4000K / 1640cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W} \, / \, \, 36^{\circ} \, \, / \, \, 4000 \text{K} \, / \, \, 810 \text{cd} \, / \, \, \text{CRI:} \, 80 \, / \, \, 40000 \text{hrs} \, \, / \, \, \text{GU5.3}$ 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3












Aluminum die-cast body, varnishing after brushing; A build-in GU5.3 ceramic lamp base is used and QR-CB51 light source should

The angle of the inner ring is asjustable.

Clip installation;

Suitable for use in areas like, hotel, fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.























LED QR-CB51(PHILIPS)


 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 2700 \text{K} \,$ / $\, 1450 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / $\, \text{GU}5.3$ 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W}\,/\,60^\circ$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \text{W} \, / \, \, 24^{\circ} \,$ / $\, 4000 \text{K} \,$ / $\, 1640 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / $\, \text{GU}5.3$ $7 \text{W} \, / \, \, 36^{\circ} \,$ / $\, 4000 \text{K} \, / \, \, 810 \text{cd}$ / CRI: 80 / $\, 40000 \text{hrs}$ / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



13.A	1531 lx	0.42 m
60°	383 lx	0.86 m
3 m	170 lx	1,30 m
30° - /- 4 m	96 lx	1.72 m
4550cd 5 m	61 lx	2.15 m
High	illuminance	Diameter















GW: 5.12Kg

The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^\circ/24^\circ/36^\circ$. LED QR-CB51 or QR-CB51 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.

Max.50W / excl. Electronic Transformer / GU5.3 / AC12V

0.17 m

0.35 m

0.85 m


1.23 m

1.55 m

1,89 m

13086 Ix

3272 lx





QR-CB51(PHILIPS)




















LED QR-CB51(PHILIPS)



 $7 \, \text{W} \, / \, \, 24^{\circ} \, \, / \, \, 2700 \, \text{K} \, \, / \, \, 1450 \text{cd} \, \, / \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \text{GU5.3}$ 7W / 36° / 2700K / 763cd / CRI: 80 / 40000hrs / GU5.3 7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \, \text{W} \, / \, \, 60^{\circ} \, \, / \, \, 3000 \, \text{K} \, \, / \, \, 341 \text{cd} \, \, / \, \, \, \text{CRI:} \, \, 80 \, \, / \, \, \, 40000 \text{hrs} \, \, / \, \, \, \, \text{GU5.3}$

 $7 \text{W}\,/\,\,24^\circ\,$ / $4000 \text{K}\,$ / $1640 \text{cd}\,$ / $\text{CRI:}\,80$ / $40000 \text{hrs}\,$ / GU5.3 $7 \text{W}\,/\,36^\circ$ / $4000 \text{K}\,/\,810 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3



43,A	1531 lx	0.42 m
60°	383 lx	0.86 m
3 m	170 lx	1.30 m
30° - /- 4 m	96 lx	1.72 m
/550cd 5 m	61 Ix	2.15 m
High	illuminance	Diameter





NW: 0.37Kg



 ∇

Ø115

Ⅲ 5 ~ 25mm **₽** 98mm





The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 10°. QT12 light source is used and the electric appliances are installed externally.

Vertical Lighting, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.




QT12(PHILIPS)



DL- R4B0079 AW Max.50W 910Im / excl. Electronic Transformer / GY6.35 / AC12V













The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $24^\circ\!.$ OT12 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.






QT12(PHILIPS)


DL- R4B0095 AW











 ∇









The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed.

QT32 light source is used and the electric appliances are installed externally.

Vertical Lighting, unadjustable.


It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.





DL- R4A0018 AW

Max.100W 1470Im / E27 / 230V~50Hz





QT32(PHILIPS)







The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^\circ/24^\circ/45^\circ$. QR-LP111 light source is used and the electric appliances are installed externally.

Vertical Lighting, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard



Ø187



QR-LP111(PHILIPS)

777 5 ~ 25mm

Ф 171mm

6PCS


DL- R4B0087 AW





























The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^{\circ}/30^{\circ}$. QPAR30 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.



25mm 5 ~ 25mm

₽ 171mm




6PCS

DL- R4B0088 AW











2596 lx 0.53 m 649 Ix 1.06 m 288 Ix 1.59 m 162 lx 104 lx 2.65 m


12W / 25° / 2700K / CRI: 80 / 45000hrs / E27







153,/	100	3247 Ix	0.46 m
60° X/	2 m	812 lx	0.92 m
YXI.	3 m	361 lx	1.39 m
30°	4 m	203 lx	1,85 m
\$25000	5 m	130 lx	2.31 m
	High	illuminance	Diameter











The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^\circ/40^\circ$. HIPAR30 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.






25 5 ~ 25mm

⊈ 171mm





DL- R5B0021 AW






Max.70W / excl. Electronic Ballast / E27




























The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 20° . HIT light source is used and the electric appliances are installed externally.

Vertical Lighting, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








HIT(PHILIPS)

DL- R5B0022 AW





Max.70W 7300lm / excl. Electronic Ballast / G12










DL- R5B0038 AW

The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 50° . HIT light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.


It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








HIT(PHILIPS)



+3/	1 _m	7857 Ix	0.92 m
60°	2 m	1964 Ix	1.85 m
	3 m	873 lx	2.77 m
30°	4 m	491 lx	3.70 m
8009sd	5 m	314 lx	4.62 m
	High	illuminance	Diameter











The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $12^{\rm s}/30^{\rm s}$. QPAR38 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.



25 5 ~ 25mm

⊈ 216mm

Ø231




4PCS









Max.120W / E27 / 220V~50Hz












18W / 25° / 2700K / CRI: 80 / 45000hrs / E27















It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.

The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^{\circ}/40^{\circ}$. HIPAR30 light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.



⊕ C€ IP20 NW: 0.91Kg 280 Ø231 **25** − 25mm **₽** 216mm




HIPAR30(PHILIPS)


DL- R5B0027 AW



















LED PAR30(PHILIPS)



	3247 lx	0.46 m
60°	812 lx	0.92 m
3 m	361 lx	1.39 m
30° - / 4 m	203 lx	1.85 m
\$250co 5 m	130 lx	2.31 m
High	illuminance	Diameter

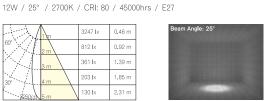









The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 20°.

HIT light source used and the electric appliances are installed externally. Variable lighting used and the second control of the control of th

Vertical Lighting, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








DL- R5B0028 AW















The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 50° . HIT light source is used and the electric appliances are installed externally. Vertical Lighting , unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.










HIT(PHILIPS)

DL- R5B0037 AW

Max.150W 14000lm / excl. Electronic Ballast / G12














The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, GU5.3 lamp holder available for LED QR-CB51 and Halogen QR-CB51, various beam angles to salt different light sources. electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








QR-CB51(PHILIPS)










Max.50W / excl. Electronic Transformer / GU5.3 / AC12V


0.17 m

0.35 m

13086 Ix


3272 lx













LED QR-CB51(PHILIPS)




7W / 60° / 2700K / 320cd / CRI: 80 / 40000hrs / GU5.3

7W / 24° / 3000K / 1550cd / CRI: 80 / 40000hrs / GU5.3 7W / 36° / 3000K / 810cd / CRI: 80 / 40000hrs / GU5.3 $7 \text{W}\,/\,60^\circ$ / $3000 \text{K}\,/\,341 \text{cd}$ / CRI: 80 / 40000 hrs / GU5.3

 $7 \text{W}\,/\,\,24^\circ\,$ / $4000 \text{K}\,$ / $1640 \text{cd}\,$ / CRI: 80 / $40000 \text{hrs}\,$ / GU5.3

 $7 \text{W} \, / \,\, 36^{\circ} \,\, / \,\, 4000 \text{K} \,\, / \,\, 810 \text{cd} \,\, / \,\, \text{CRI:} \,\, 80 \,\, / \,\, 40000 \text{hrs} \,\, / \,\, \text{GU5.3}$ 7W / 60° / 4000K / 360cd / CRI: 80 / 40000hrs / GU5.3

13,1	101	1531 lx	0.42 m
60°	2 m	383 lx	0.86 m
PXI	3 m	170 lx	1.30 m
30°	4 m	96 lx	1.72 m
/ _{550cd}	5 m	61 lx	2.15 m
	High	Illuminance	Diameter












The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed , ${\sf GY6.35}$ lamp holder available for QT12, various beam angles to suit different light sources.

electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.

Max.50W 910Im / excl. Electronic Transformer / GY6.35 / AC12V








DL- R4B0085 AW













The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed , GY6.35 lamp holder available for QT12, various beam angles to suit different light sources. electric appliances are installed externally. Adjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.



350° Horizontally


₽ 133mm




6PCS

DL- R4B0092 AW

Max.50W 910Im / excl. Electronic Transformer / GY6.35 / AC12V













The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted painting. Specular aluminium reflector is installed and the beam angle is 36°.

R63 light source is used and the electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.









Max.60W 680Im / E27 / 220V~50Hz














The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, 68.5 lamp holder available for HIT-CRI, various beam angles to suit different light sources.

electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








R5B0018 AW

Max.35W 3500lm / excl. Electronic Ballast / G8.5














The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for QPAR20 and HIPAR20, various beam angles to suit different light sources, electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.





350° Horizontally

₽ 133mm



QPAR20(PHILIPS)






Max.50W / E27 / 230V~50Hz












HIPAR20(PHILIPS)









一大学、	1 _m	21896 lx	0.17 m
60° X//	2 m	5474 lx	0.35 m
Y.[]	3 m	2433 lx	0.52 m
30°	4 m	1369 lx	0.70 m
22000cd	5 m	876 lx	0.87 m
	High	illuminance	Diameter









LED PAR20(PHILIPS)
















The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, G53 lamp holder available for QR-LP111, various beam angles to suit different light sources.

electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.







DL- R4B0089 AW












Max.75W / excl.Electronic Transformer / G53 / AC12V




















The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for OPAR30 and HIPAR30, various beam angles to suit different light sources. electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.





Ø187

350° Horizontally


25mm 5 ~ 25mm

₽ 171mm




DL- R4A0019 AW






Max.75W / E27 / 220V~50Hz




























The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for OPAR30 and HIPAR30, various beam angles to suit different light sources. electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








HIPAR30(PHILIPS)


DL- R5B0023 AW







Max.70W / excl. Electronic Ballast / E27













LED PAR30(PHILIPS)





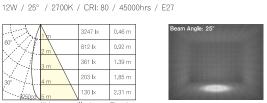









The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, G12 lamp holder available for HIT, various beam angles to suit different light sources.

electric appliances are installed externally.


It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.







DL-R5B0024 AW Max.70W 7300Im / excl. Electronic Ballast / G12













The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, G12 lamp holder available for HIT, various beam angles to suit different light sources. electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.

















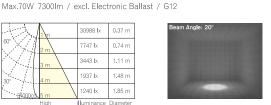

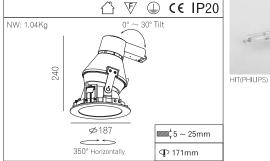














The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for OPAR38 and HIPAR30, various beam angles to suit different light sources. electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE $\,$ certified and all materials are in conformity with RoHS standard.





₽ 216mm

350° Horizontally



QPAR38(PHILIPS)







Max.120W / E27 / 220V~50Hz

9196 Ix

2299 Ix


0.21 m

0.43 m



18W / 25° / 2700K / CRI: 80 / 45000hrs / E27










153/	100	5139 lx	0.46 m
60°	2 m	1285 Ix	0.92 m
	3 m	571 lx	1.39 m
30°	4 m	321 lx	1,85 m
F150cc	5 m	206 lx	2.31 m
	High	illuminance	Diameter











The lamp body is made of aluminium alloy th \$\mathbb{Z}\$ough die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^\circ/40^\circ$. HIPAR30 light source is used and the electric appliances are installed externally.

externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE $\,$ certified and all materials are in conformity with RoHS standard.







DL-R5B0029 AW











12W / 25° / 2700K / CRI: 80 / 45000hrs / E27








LED PAR30(PHILIPS)



43,	3247 Ix	0.46 m
60° 2 m	812 lx	0.92 m
3 m	361 lx	1.39 m
30° /- 4 m	203 lx	1.85 m
\$250co 5 m	130 lx	2.31 m
High	illuminance	Diameter














The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, G12 lamp holder available for HIT, various beam angles to suit different light sources.

electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE $\,$ certified and all materials are in conformity with RoHS standard.









DL-R5B0030 AW

Max.150W 14000lm / excl. Electronic Ballast / G12












The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, G12 lamp holder available for HIT, various beam angles to suit different light sources, electric appliances are installed externally.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.







4PCS



Max.150W 14000lm / excl. Electronic Ballast / G12













DL- R4B0086 AW


The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted painting. Specular aluminium reflector is installed and the beam angle is 36°. OT12 light source is used and the electric appliances are installed externally. Wall washer, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.






Max.50W 910Im / excl. Electronic Transformer / GY6.35 / AC12V









QT12(PHILIPS)






The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted painting. Specular aluminium reflector is installed and the beam angle is 36°. HIT-CRI light source is used and the electric appliances are installed externally. Wall washer, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.








HIT-CRI(PHILIPS)



Max.35W 3500lm / excl. Electronic Ballast / G8.5













The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for QPAR20 and HIPAR20, various beam angles to suit different light sources. electric appliances are installed externally. Wall washer, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.



₽ 133mm



6PCS

DL-R5B0020 AW





Max.50W / E27 / 230V~50Hz











HIPAR20(PHILIPS)











Max.35W / excl. Electronic Ballast / E27
















	1595 Ix	0.46 m
60° / 2 m	399 Ix	0.92 m
3 m	177 lx	1.39 m
30° /- 4 m	100 lx	1.85 m
2000cd 5 m	64 Ix	2.31 m
High	illuminance	Diameter







Ø187

350° Horizontally

NW: 0.98Kg

225





The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted. Specular aluminium reflector is installed, E27 lamp holder available for QPAR30 and HIPAR30, various beam angles to suit different light sources. electric appliances are installed externally. Wall washer, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.





Ⅲ 5 ~ 25mm

Ф 171mm




QPAR30(PHILIPS)


DL- R5B0025 AW












LED PAR30(PHILIPS)





12W / 25° / 2700K / CRI: 80 / 45000hrs / E27






HIPAR30(PHILIPS)



Max.70W / excl. Electronic Ballast / E27















DL- R5B0026 AW


The lamp body is made of aluminium alloy through die-casting, and then shaped by CNC. The finish is sandblasted painting. Specular aluminium reflector is installed and the beam angle is 30° . HIT light source is used and the electric appliances are installed externally. Wall washer, unadjustable.


It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.






Max.70W 7300lm / excl. Electronic Ballast / G12







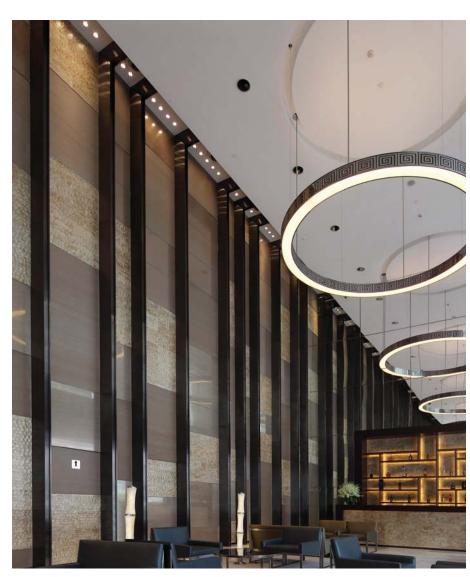





≠231

350° Horizontally

NW: 1.21Kg

262

⊕ C€ IP20

25 − 25mm

₽ 216mm





)L-R4A0023 AW

The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is $10^\circ/30^\circ$. QPAR38 light source is used and the electric appliances are installed externally

externally.
Wall washer, unadjustable.


It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.



QPAR38(PHILIPS)



Max.120W / E27 / 220V~50Hz







			marrian and	Diamotor
		1\m	3086 lx	0.53 m
200	60 / [2 m	772 lx	1.06 m
30°		3 m	343 lx	1.59 m
	300	4 m	193 lx	2.12 m
	4000cd	5 m	123 lx	2.65 m



LED PAR38(PHILIPS)

18W / 25° / 2700K / CRI: 80 / 45000hrs / E27












R5B0032 AW

The lamp body is made of aluminium alloy through die-casting , and then shaped by CNC. The finish is sandblasted painting . Specular aluminium reflector is installed and the beam angle is 24° . HIT light source is used and the electric appliances are installed externally. Wall washer, unadjustable.

It is suitable for star-rated hotels, classic club, franchise stores, homes, etc... The products is CE certified and all materials are in conformity with RoHS standard.







Max.150W 14000lm / excl. Electronic Ballast / G12

	31494 lx	0.44 m
60°	7874 Ix	0.87 m
3 m	3499 Ix	1.31 m
30° 4 m	1968 lx	1.74 m
40000cd 5 m	1260 lx	2.18 m
High	illuminance	Diameter













DL-T3A0006 XW **DL- T3A0006** AW

Aluminum die-cast body, powder coating finishing.

By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen

This product contains a combination of PMMA lens and aluminum reflector to achieve narraw beam performance.

Available with different beam angle interchangable reflectors.

Horizontal rotation 350°, vertical rotation plus or minus 90° and mounting with 3

Suitable for use in areas like fancy stores, theatre, gallery and etc.

This product is in compliance with CE and RoHS directives.

NW: 0.98Kg 90° Tilt



DL- T3A0006 YB

20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V



43,	1 _m	14766 lx	0.17 m
	2 m	3692 lx	0.35 m
PALI	3 m	1461 lx	0.50 m
30°	4 m	923 lx	0.67 m
1,4800cd	5 m	591 lx	0.85 m
		illuminance	Diameter







AB0119 YB

20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V



20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V




- -	5076 lx	0.42 m
60" 2 m	1269 lx	0.86 m
	564 lx	1,30 m
30° /- 4 m	317 lx	1.72 m
5100cd 5 m	203 lx	2.15 m
High	illuminance	Diameter




20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V 20W LED 2700K-3000K / With 480mA LED Driver / 37V




H3, 1	2546 lx	0.57 m
60° 2 m	637 lx	1.15 m
3 m	283 lx	1,95 m
30° - 1 4 m	159 lx	2.47 m
260004 5 m	102 lx	3.16 m
High	illuminance	Diameter












24° and 36° Interchangeable reflector













DL-T3A0007 XW DL-T3A0007 AW DL-T3A0007 YB

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V

Aluminum die-cast body, powder coating finishing. By using the new generation of CITIZEN COB LED chip,

achieve narraw beam performance.

Available with different beam angle interchangable reflectors.

Suitable for use in areas like fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.


performance;

this product creates extreme low heat and offers an excellent lumen

This product contains a combination of PMMA lens and aluminum reflector to

Horizontal rotation 350°, vertical rotation plus or minus 90° and mounting with 3












AB0121 YB

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V







30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V




43,1	3097 lx	0.57 m
60° 2 m	774 lx	1.15 m
3 m	344 Ix	1.95 m
30° 4 m	194 lx	2.47 m
\$1500sL 5 m	124 lx	3.16 m
High	illuminance	Diameter




十七分,/	1\m	3097 lx	0.57 m
60°	2 m	774 lx	1.15 m
PAL.	3 m	344 lx	1.95 m
30°	4 m	194 lx	2.47 m
315009	5 m	124 lx	3.16 m
	High	illuminance	Diameter





8° and 16° Interchangeable reflector



24° and 36° Interchangeable reflector





NW: 1.14Kg









DL-T3A0040 XW DL-T3A0040 AW **DL-T3A0040** YB

Aluminum die-cast body, powder coating finishing.

By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen

This product contains a combination of PMMA lens and aluminum reflector to achieve narraw beam performance.

A range of reflectors are available with different beam angles, completing with high reflecting specular anodizing plated finishing. Adjustable direction, and mounting with 3 circuit track.

Suitable for use in areas like fancy stores, show rooms, gallery, museum etc. This product is in compliance with CE and RoHS directives.

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



一大沙、	100	15876 lx	0.17 m
60°	2 m	3969 lx	0.35 m
PXII	3 m	1764 lx	0.50 m
30°	4 m	992 lx	0.67 m
1,6000cd	5 m	635 lx	0.85 m
		illuminance	Diameter




30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V





	7468 lx	0.42 m
60° 2 m	1867 lx	0.86 m
X/ 1 3 m	830 lx	1.30 m
30° 4 m	467 lx	1.72 m
7500cd 5 m	299 lx	2.15 m
High	illuminance	Diameter






H3, /	3097 lx	0.57 m
60° 2 m	774 lx	1.15 m
3 m	344 Ix	1,95 m
30° 4 m	194 lx	2.47 m
\$1500b 5 m	124 lx	3.16 m
High	illuminance	Diameter





8° and 16° Interchangeable reflector




24° and 36° Interchangeable reflector













DL-T3A0046 XW

DL-T3A0046 AW

DL-T3A0046 YB

Pure Aluminum body and heatsink, powder coating finishing By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen performance.

This product contains a combination of PMMA lens and aluminum reflector to achieve narraw beam performance.


A range of reflectors are available with different beam angles. completing with high reflecting specular anodizing plated finishing. Adjustable direction, and mounting with 3 circuit track.

Suitable for use in areas like fancy stores, show rooms, gallery, museum etc. This product is in compliance with CE and RoHS directives.

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



一大办。	1 m	15876 Ix	0.17 m
(%) (%)	2 m	3969 Ix	0.35 m
Y.J.]	3 m	1764 lx	0.50 m
30°	4 m	992 lx	0.67 m
16000cd	5 m	635 lx	0.85 m
	High	illuminance	Diameter




30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V




上去 ,/	1 m	7468 Ix	0.42 m
60° × / /	2 m	1867 Ix	0.86 m
PXII.	3 m	830 lx	1.30 m
30°	4 m	467 lx	1.72 m
750000	5 m	299 lx	2.15 m
	High	illuminance	Diameter






13/	1 m	3097 Ix	0.57 m
60° X.//	2 m	774 lx	1.15 m
YXI.	3 m	344 lx	1.95 m
30°	4 m	194 lx	2.47 m
315009	5 m	124 lx	3.16 m
	High	Illuminance	Diameter





8° and 16° Interchangeable reflector




24° and 36° Interchangeable reflector













DL- T3A0049 XW **DL- T3A0049** AW **DL- T3A0049** YB

This product contains a aluminum die-cast body and pure aluminum heat sink, completes with powder coating finishing;

By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen performance;

. A range of aluminum reflectors are available with different beam angles, completing with high reflecting specular anodizing plated finishing Adjustable direction, and mounting with 3 circuit track;

Suitable for use in areas like fancy stores, show rooms, gallery, museum etc. This product is in compliance with CE and RoHS directives.

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



人 动。	1 m	9443 lx	0.21 m
60°	2 m	2361 lx	0.42 m
ř×41	3 m	1049 lx	0.63 m
30°	4 m	590 lx	0.84 m
9500cd	5 m	378 lx	1.05 m
	High	illuminance	Diameter



30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V





30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V





H-3, //	3097 lx	0.57 m
60° × 1 2 m	774 lx	1,15 m
3 m	344 lx	1.95 m
30° - 4 m	194 lx	2.47 m
\$1500x 5 m	124 lx	3.16 m
High	illuminance	Diameter






12° / 18° / 32° / 36° Interchangeable reflector













DL-T3A0050 XW

DL-T3A0050 AW

DL-T3A0050 YB

Aluminum die-cast body and powder coating finishing: By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen

A range of aluminum reflectors are available with different beam angles, completing with high reflecting specular anodizing plated finishing Adjustable direction, and mounting with 3 circuit track;

Suitable for use in areas like fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.

20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V



人 动。	100	14766 lx	0.17 m
60°	2 m	3692 lx	0.35 m
XI	3 m	1461 lx	0.50 m
	4 m	923 lx	0.67 m
1,4800cd	5 m	591 lx	0.85 m
		illuminance	Diameter




20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V



20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V 20W LED 2700K-3000K / With 500mA LED Driver / 37V












H3,/	100	2546 lx	0.57 m
60°	2 m	637 lx	1.15 m
YAL]	3 m	283 lx	1.95 m
300	4 m	159 lx	2.47 m
260004	5 m	102 lx	3.16 m
	High	illuminance	Diameter





8° and 16° Interchangeable reflector




24° and 36° Interchangeable reflector













DL-T3A0051 AW **DL-T3A0051** YB

DL-T3A0051 XW

Aluminum die-cast body and powder coating finishing; By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen

A range of aluminum reflectors are available with different beam angles, completing with high reflecting specular anodizing plated finishing Adjustable direction, and mounting with 3 circuit track;

Suitable for use in areas like fancy stores, theatre, gallery and etc. This product is in compliance with CE and RoHS directives.



143	1m	7722 lx	0.26 m
60°	2 m	193 lx	0.53 m
	3 m	858 lx	0.79 m
300	4 m	483 lx	1.05 m
/1800cd	5 m	309 lx	1.32 m
	High	illuminance	Diameter
















DL-T3A0052 XW

DL-T3A0052 AW

DL-T3A0052 YB

COB LED(CITIZEN)

Aluminum die-cast body, powder coating finishing.

By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen performance.


This product contains a combination of PMMA lens and aluminum reflector to achieve narraw beam performance.

A range of reflectors are available with different beam angles. completing with high reflecting specular anodizing plated finishing. Adjustable direction, and mounting with 3 circuit track.

Suitable for use in areas like fancy stores, show rooms, gallery, museum etc. This product is in compliance with CE and RoHS directives.

30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V









30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V



30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V 30W LED 2700K-3000K / With 700mA LED Driver / 37V












15,/	1 (1)	3097 Ix	0.57 m
60°)×(//	2 m	774 lx	1.15 m
M	3 m	344 lx	1,95 m
30°	4 m	194 lx	2.47 m
31500	5 m	124 lx	3.16 m
	High	Illuminance	Diameter





8° and 16° Interchangeable reflector



24° and 36° Interchangeable reflector










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting.

QR-LP111 light source is used; electric appliances are installed inter-nally and the radiation angle is adjustable;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.





DL- C4A0003 AW **DL-C4A0003** AS


Max.75W / With Electronic Transformer / G53 / 230V~50Hz Max.75W / With Electronic Transformer / G53 / 230V \sim 50Hz
















Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz

















	111911	marrin larroo	Diamotor
トラ /	100	2668 Ix	0.81 m
60° X [2 m	667 Ix	1.62 m
\wedge / \downarrow	3 m	296 lx	2.44 m
30°	4 m	167 lx	3,25 m
2750cd	5 m	107 lx	4.06 m
	High	illuminance	Diameter












Adopt CITIZEN LED with Nichia chip, wich is stable and reliable with high luminous flux. stacked aluminium fins with copper tube to aggrandize the area

Shaped by CNC machines. The surface is treated by dusting or brushed

and speed up the heat dissipation to rising hot air to speed up the circulation and convection, dissipates internal heat while maximizing light lifespan to prevent lamp and fixture damage.

It is suitable for hotels, department stores, various franchise stores, garment stores, su-perfine goods stores, art galleries, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHs







DL-C3A0115 XW

30W LED 2700K-3000K / With 720mA LED Driver / 37V





aluminium.












The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting. QR-LP111 light source is used; electric appliances are installed internally and

the radiation angle is adjustable.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.







DL-C4A0010 AW **DL-C4A**0010 AS


Max.75W / With Electronic Transformer / G53 / 230V~50Hz Max.75W / With Electronic Transformer / G53 / 230V~50Hz















Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.100W / With Electronic Transformer / G53 / 230V~50Hz


































DL-C4A0011 AW

DL-C4A0011 AS

OR-LP111(PHILIPS)

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting.

QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.


Max.2 x 75W / With Electronic Transformer / G53 / 230V~50Hz Max.2 x 75W / With Electronic Transformer / G53 / 230V \sim 50Hz

Max.2 x 100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.2 x 100W / With Electronic Transformer / G53 / 230V~50Hz











C4A0012 AW **C4A0012** AS

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting.

QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

Max.3 \times 75W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.3 x 75W / With Electronic Transformer / G53 / 230V \sim 50Hz

Max.3 x 100W / With Electronic Transformer / G53 / 230V~50Hz Max.3 x 100W / With Electronic Transformer / G53 / 230V \sim 50Hz










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting.

QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.







DL-C4A0013 AW **DL-C4A0013** AS

Max.75W / With Electronic Transformer / G53 / 230V~50Hz Max.75W / With Electronic Transformer / G53 / 230V \sim 50Hz


















Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz
































the radiation angle is adjustable.

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting. QR-LP111 light source is used; electric appliances are installed internally and

It is suitable for hotels, department stores, various franchise stores, garment





DL-C4A0014 AW **DL-C4A0014** AS

Max.2 x 75W / With Electronic Transformer / G53 / 230V~50Hz Max.2 x 75W / With Electronic Transformer / G53 / 230V \sim 50Hz

Max.2 x 100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.2 x 100W / With Electronic Transformer / G53 / 230V~50Hz






The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting.

QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable.

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.







C4A0015 AW $\rm Max.3 \times 75W$ / With Electronic Transformer / G53 / 230V~50Hz **C4A0015** AS Max.3 x 75W / With Electronic Transformer / G53 / 230V~50Hz

> Max.3 x 100W / With Electronic Transformer / G53 / 230V~50Hz Max.3 x 100W / With Electronic Transformer / G53 / 230V \sim 50Hz









The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting or brush


QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

Max.75W / With Electronic Transformer / G53 / 230V~50Hz


Max.75W / With Electronic Transformer / G53 / 230V~50Hz






DL- C4A0016 AW **DL-C4A0016** AS


















Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz Max.100W / With Electronic Transformer / G53 / 230V \sim 50Hz


































OR-LP111(PHILIPS)

DL-C4A0017 AW **DL-C4A0017** AS

Max.2 x 75W / With Electronic Transformer / G53 / 230V~50Hz Max.2 x 75W / With Electronic Transformer / G53 / 230V \sim 50Hz

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting or brush QR-LP111 light source is used; electric appliances are installed internally and

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes, This product is CE certified and all materials are in conformity with RoHS

the radiation angle is adjustable;


standard.

Max.2 x 100W / With Electronic Transformer / G53 / 230V~50Hz Max.2 x 100W / With Electronic Transformer / G53 / 230V~50Hz











C4A0018 AW C4A0018 AS

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by dusting or brush aluminum.

QR-LP111 light source is used; electric appliances are installed internally and the radiation angle is adjustable;

It is suitable for hotels, department stores, various franchise stores, garment stores, superfine goods stores, art galleries, enter-tainment places, homes,

This product is CE certified and all materials are in conformity with RoHS standard.

 $\rm Max.3 \times 75W$ / With Electronic Transformer / G53 / 230V~50Hz Max.3 \times 75W / With Electronic Transformer / G53 / 230V \sim 50Hz

Max.3 x 100W / With Electronic Transformer / G53 / 230V~50Hz Max.3 x 100W / With Electronic Transformer / G53 / 230V \sim 50Hz












The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. The acrylic tube is made of PC, molded by extrusion and internally treated by sandblasting, with good light transmission; High power LED light source is used, and electric appliances are installed

internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS





DL-W3A0001 BV

1W Power LED White / With 350mA LED Driver / AC230V~50Hz

3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz









DL-W3A0002 BV

NW: 0.7Kg



The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. The acrylic tube is made of PC, molded by extrusion and internally treated by sandblasting, with good light transmission; High power LED light source is used, and electric appliances are installed

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS

2 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz

DL-W3A0002 BV 2 x 3W Power LED White / With 700mA LED Driver / AC230V~50Hz












High power LED light source is used, and electric appliances are installed internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL-W3A0003 BV

1W Power LED White / With 350mA LED Driver / AC230V~50Hz

DL-W3A0003 BV

3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz











DL-W3A0004 BV

2 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz

The produc is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. Single direction light-remitting or double direction light-remitting is available

High power LED light source is used, and electric appliances are installed

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS

as an option;




LED(EDISON)

DL-W3A0004 BV

 $2\times3W$ Power LED White / With 700mA LED Driver / AC230V \sim 50Hz




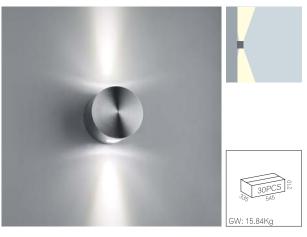

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. Light transmission lens is made of PMMA material with transmittance rate as 93%, and the available angle options are 15°, 30°, 45°.


High power LED light sources is used (two light sources or four light sources are available as options), and electric appliances are installed internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.



LED(EDISON)


DL- W3A0005 BV 2 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz

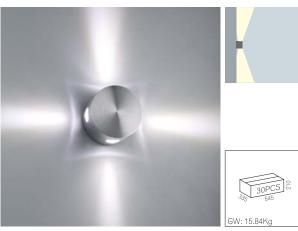

The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. Light transmission lens is made of PMMA material with transmittance rate as 93%, and the available angle options are 15°, 30°, 45°.

High power LED light sources is used (two light sources or four light sources are available as options), and electric appliances are installed internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS






DL- W3A0006 BV 4 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz





The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. High power LED light source is used, and electric appliances are installed

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.






DL-W3A0009 BV **DL-W3A0009** AW

DL-W3A0009 BV DL-W3A0009 AW 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 1W Power LED White / With 350mA LED Driver / AC230V~50Hz

3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz

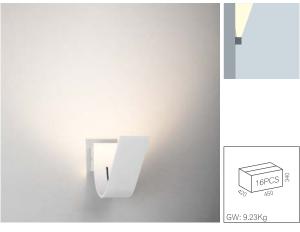


The main body is made of pure aluminum through high-precision CNC process.

The surface is treated by dusting .All luminaires use Citizen. COB LED with high CRI.

With ultra-thin lamp body design, simplicity streamline and gentle lit effect.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL-W3A0118 AW **DL-W3A0118** AB

3W LED 3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 3000K / With 300mA LED Driver / AC230V~50Hz










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. Single direction light-remitting or double direction light-remitting is available; High power LED light source is used, and electric appliances are installed internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.






DL-W3A0007 BV 1W Power LED White / With 350mA LED Driver / AC230V~50Hz

3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz











The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. Single direction light-remitting or double direction light-remitting is available; High power LED light source is used, and electric appliances are installed

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.

DL-W3A0008 BV 2 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz


DL-W3A0008 BV 2 x 3W Power LED White / With 700mA LED Driver / AC230V~50Hz












It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL-W3A0010 BV **DL-W3A0010** AS

DL-W3A0106 BV

DL-W3A0106 AS

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz








The main body is made of pure aluminum through high-precision CNC process

The surface is varnished after brushing.All luminaires use Citizen COB LED with high CRI.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS





COB LED(CITIZEN)

1 x 3W LED 3000K / With 350mA LED Driver / AC230V~50Hz $1\times3W$ LED 3000K/ With 350mA LED Driver / AC230V $\sim\!50\text{Hz}$










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. The high power LED light source combination consists of 6PCS light sources, forming single direction light-remitting or double direction light-remitting as options, and the electric appliances are installed internally;

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL- W3A0011 BV **DL- W3A0011** AS

2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz $2 \times (3 \times 1)$ W Power LED White / With 350mA LED Driver / AC230V \sim 50Hz










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. The high power LED light source combination consists of 4PCS light sources double direction light-remitting as options, and the electric appliances are installed internally;

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





 $2 \times (2 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $2\,\mathrm{x}\,(2\,\mathrm{x}\,1)\mathrm{W}$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz










The product is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is varnished after brushing. The high power LED light source combination consisting of 3PCS light sources, forming single direction light-remitting or double direction lightremitting as options, and the electric appliances are installed internally;


It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.





DL-W3A0070 AW

 $2 \times (3 \times 1)$ W LED 3000K / With 350mA LED Driver / AC230V~50Hz








The main body is made of pure aluminum through high-precision $\ensuremath{\mathsf{CNC}}$ process.

The surface is varnished after brushing.All luminaires use Citizen COB LED with high CRI.


It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS






DL-W3A0124 BV DL-W3A0124 AW 3W LED 3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 3000K / With 300mA LED Driver / AC230V $\sim\!50\text{Hz}$





The main body is made of pure aluminum and treated my dusting. It's designed with ultra-thin housing, simplicity streamline, and gentle lit effect. High CRI Citizen LED light source is used.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.






DL-W3A0114 AS **DL- W3A0114** AW 3W LED 3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 3000K / With 300mA LED Driver / AC230V~50Hz















DL-W3A0115 AS **DL-W3A0115** AW This product is made of pure aluminum and treated by dusting. All luminaires use Citizen COB LED with high CRI. With ultra-thin lamp body design, simplicity streamline and gentle lit effect.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS


3W LED 3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 3000K/ With 300mA LED Driver / AC230V~50Hz







It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL- W3A0113 AS **DL- W3A0113** AW

3W LED 3000K / With 300mA LED Driver / AC230V~50Hz $3W\ LED\ 3000\mbox{K/}\ With\ 300\mbox{mA}\ LED\ Driver\ /\ AC230\mbox{V}{\sim}50\mbox{Hz}$








The product is made of pure aluminum and molded through exrusion, and then shaped by CNC machines.The surface is treated by dusting. Inside Gold color finishing to show special lighting effect. LED chip is used , and electric appliances are installed internally.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS





DL- W3A0074 AB **DL- W3A0074** AW

 $2\times3W$ Power LED White / With 700mA LED Driver / AC230V \sim 50Hz $2\times3W$ Power LED White / With 700mA LED Driver / AC230V $\sim\!50Hz$












The surface is treated by dusting .All luminaires use Citizen. COB LED with high CRI.

With ultra-thin lamp body design, simplicity streamline and gentle lit effect.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.





DL- W3A0117 AB **DL-W3A0117** AW

2 x 3W LED 3000K / With 300mA LED Driver / AC230V~50Hz $2 \times 3W$ LED 3000K / With 300mA LED Driver / AC230V \sim 50Hz








The surface is treated by dusting .All luminaires use Citizen. COB LED with high CRI.

The main body is made of pure aluminum through high-precision CNC

With ultra-thin lamp body design, simplicity streamline and gentle lit effect.

process.

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard.






DL- W3A0116 AB DL-W3A0116 AW


 $2 \times 3W$ LED 3000K / With 300mA LED Driver / AC230V \sim 50Hz $2\times3W$ LED 3000K/ With 300mA LED Driver / AC230V $\sim\!50\text{Hz}$







It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS standard





DL- W4A0105 AB **DL- W4A0105** AW

DL- W3A0136 AB


DL- W3A0136 AW

Max.60W / G9 / AC230V~50Hz Max.60W / G9 / AC230V~50Hz











gentle lit effect.


standard.

 $2\times3W$ LED 3000K/ With 300mA LED Driver / AC230V $\sim\!50\text{Hz}$ $2\times3W$ LED 3000K/ With 300mA LED Driver / AC230V $\sim\!50\text{Hz}$

The product is made of pure aluminum and molded through extrusion,and then through high-precision CNC process. The surface is treated by dusting. All luminaires use Citizen COB LED with high CRI. simplicity streamline and

It is suitable for bars, star-rated hotels, entertainment places, homes, etc. This product is CE certified and all materials are in conformity with RoHS



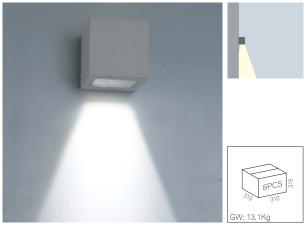


The lamp body is made of pure aluminum and is molded through extrusion. and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class is IP54.

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.


It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0018 OS **DL- W3A0018** OB **DL- W3A0018** OW

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz

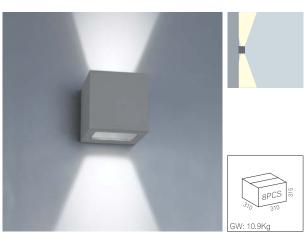


The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED or H-PIN light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0019 OS DL- W3A0019 OB **DL- W3A0019** OW

2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz 2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz $2 \times (3 \times 1)$ W Power LED White / With 350mA LED Driver / AC230V \sim 50Hz

H-PIN(PHILIPS)

DL- W4A0001 OS Max.40W / G9 / AC230V~50Hz **DL- W4A0001** OB Max.40W / G9 / AC230V~50Hz **DL- W4A0001** OW Max.40W / G9 / AC230V~50Hz










The lamp body is made of pure aluminum and is molded through extrusion. and then shaped by CNC machines; the surface is treated by two processes of

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class is IP54

H-PIN light source is used.


It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W4A0002 OW

DL-W4A0002 OS Max.40W / G9 / AC230V~50Hz DL-W4A0002 OB Max.40W / G9 / AC230V~50Hz Max.40W / G9 / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W3A0020 OS

DL-W3A0020 OB

DL-W3A0020 OW


5 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $5\,x\,1W\,$ Power LED $\,$ White / With 350mA LED Driver / AC230V $\sim\!50Hz$ $5\times1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$













LED(EDISON)



LED(EDISON)

DL-W3A0021 OS DL-W3A0021 OB **DL-W3A0021** OW 8 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $8\times1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$ $8\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V~50Hz

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class $% \left(1\right) =\left(1\right) \left(1\right)$

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.

electrostatic dusting.


is IP54.



LED(EDISON)

DL-W3A0026 OS **DL-W3A0026** OB **DL-W3A0026** OW

10 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 10 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 10 x 1W Power LED White / With 350mA LED Driver / AC230V \sim 50Hz

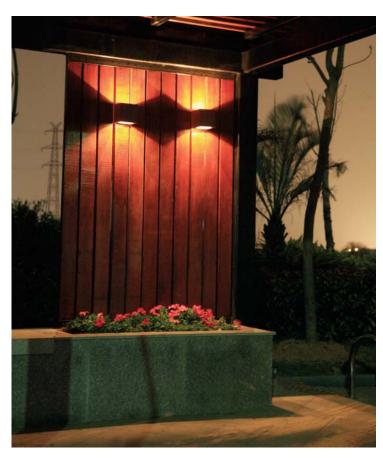













Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0022 OS DL- W3A0022 OB **DL- W3A0022** OW

 $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $3\times1W$ Power LED White / With 350mA LED Driver / AC230V~50Hz $3\times1W$ Power LED White / With 350mA LED Driver / AC230V $\!\sim\!50\text{Hz}$



DL-W4A0003 OS **DL-W4A0003** OB **DL- W4A0003** OW

Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED or QPAR16 light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0023 OS DL- W3A0023 OB **DL- W3A0023** OW

2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz $2\,x\,(3\,x\,1)W\,$ Power LED $\,$ White $\,/\,$ With 350mA LED Driver $\,/\,$ AC230V $\!\sim\!50Hz$ $2\times(3\times1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz



DL-W4A0004 OS DL- W4A0004 OB **DL- W4A0004** OW

2 x Max.50W / GU10 / AC230V~50Hz 2 x Max.50W / GU10 / AC230V~50Hz 2 x Max.50W / GU10 / AC230V~50Hz










The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class $% \left(1\right) =\left(1\right) \left(1\right)$ is IP54.

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0024 OS **DL- W3A0024** OB





DL- W4A0009 OS 2 x Max.50W / GU10 / AC230V~50Hz **DL-W4A0009** OB 2 x Max.50W / GU10 / AC230V~50Hz **DL- W4A0009** OW 2 x Max.50W / GU10 / AC230V~50Hz






The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.


It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0012 OS DL- W3A0012 OB **DL-W3A0012** OW

3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz

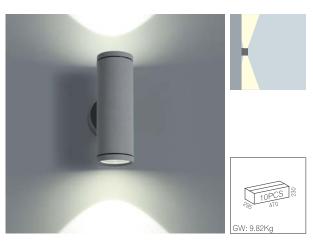


The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated $\,$ by two processes of electrostatic dusting. Under the cover clear optical toughened glass is installed; silica gel waterproof

gasket which is resistant to high temperature is installed; the protection class This product uses LED light source which is of energy saving and low

consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W3A0013 OS **DL-W3A0013** OB **DL-W3A0013** OW

2 x (3 x 1W) Power LED White / With 700mA LED Driver / AC230V~50Hz $2\,x$ (3 x 1W) Power LED White / With 700mA LED Driver / AC230V $\sim\!50Hz$ $2\times(3\times1W)\,$ Power LED White / With 700mA LED Driver / AC230V \sim 50Hz










The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W3A0014 OS DL-W3A0014 OB **DL-W3A0014** OW

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$








The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated $\frac{1}{2}$ by two processes of electrostatic dusting. Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses H-PIN or QPAR16 light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W4A0010 OS Max.40W / G9 / AC230V~50Hz **DL-W4A0010** OB Max.40W / G9 / AC230V~50Hz **DL-W4A0010** OW Max.40W / G9 / AC230V~50Hz



DL-W4A0006 OS **DL-W4A0006** OB **DL-W4A0006** OW

Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz










The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED or TC-DSE light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W3A0015 OS **DL-W3A0015** OB **DL-W3A0015** OW

 $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $3\times1W$ Power LED White / With 350mA LED Driver / AC230V $\!\sim\!50\text{Hz}$



DL-W2A0003 OS **DL-W2A0003** OB **DL-W2A0003** OW

Max.9W / E27 / AC230V~50Hz Max.9W / E27 / AC230V~50Hz Max.9W / E27 / AC230V~50Hz








The cover and the lamp body are made of aluminum alloy and are molded through die-casting, and then shaped by CNC machines; the surface is treated $\,$ by two processes of electrostatic dusting.

Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses H-PIN or QPAR16 light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL-W4A0011 OS **DL-W4A0011** OB **DL-W4A0011** OW

Max.40W / G9 / AC230V~50Hz Max.40W / G9 / AC230V~50Hz Max.40W / G9 / AC230V~50Hz



DL-W4A0007 OS **DL-W4A0007** OB **DL-W4A0007** OW

Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz Max.50W / GU10 / AC230V~50Hz

www.winnerlight.co.th












Under the cover clear optical toughened glass is installed; silica gel waterproof gasket which is resistant to high temperature is installed; the protection class

This product uses LED or QPAR16 light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.





DL- W3A0016 OS **DL- W3A0016** OB **DL-W3A0016** OW

2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz 2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz 2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz



DL- W4A0005 os **DL-** W4A0005 OB **DL- W4A0005** OW

Max.2 x 50W / GU10 / AC230V~50Hz Max.2 x 50W / GU10 / AC230V~50Hz Max.2 x 50W / GU10 / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of electrostatic dusting.

PC light transmission housing is used; above and under the housing silica gel waterproof gaskets which are resistant to high temperature are installed; the protection class is IP54.

This product uses LED light source which is of energy saving and low consumption, and electric appliances are installed internally.

It is suitable for exterior corridor, passage- way and so on. All materials are in conformity with RoHS standard, and are CE certified.






DL-W3A0017 OS 3W Power LED White / With 700mA LED Driver / AC230V~50Hz **DL- W3A0017** OB 3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz **DL- W3A0017** OW 3W Power LED White / With 700mA LED Driver / AC230V~50Hz













DL-R3A0009 os DL-R3A0009 OB DL-R3A0009 OW The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

Embedded installed frame made of PP fireproof material through injection molding is supplied with the product.

The cover is equipped with 10mm thick sandblasted fully toughened glass; silica gel waterproof gaskets which are resistant to high temperature are installed around the glass and under the cover; the protection class is IP55. LED is used for this product; electric appliances are installed internally.


It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS

 $3\times1W$ Power LED White / With 350mA LED Driver / AC230V~50Hz $3\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$ 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz











DL-R3A0018 OS **DL-R3A0018** OB **DL-R3A0018** OW The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

Embedded installed frame made of PP fireproof material through injection molding is supplied with the product.

The cover is equipped with 10mm thick sandblasted fully toughened glass; silica gel waterproof gaskets which are resistant to high temperature are installed around the glass and under the cover; the protection class is IP55. CITIZEN COB LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.


7W LED 2700K-3000K / With 180mA LED Driver / AC230V \sim 50Hz 7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz 7W LED 2700K-3000K / With 180mA LED Driver / AC230V \sim 50Hz












Embedded installed frame made of PP fireproof material through injection molding is supplied with the product.

The cover is equipped with 10mm thick sandblasted fully toughened glass; silica gel waterproof gaskets which are resistant to high temperature are installed around the glass and under the cover; the protection class is IP55. QT9 is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.





DL-R4A0143 OB **DL-R4A0143** OW


DL-R4A0143 OS

20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V







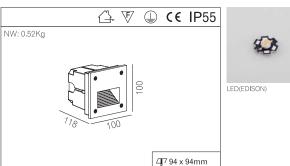

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The cover side is equipped with sandblasted fully toughened glass with woven design and the four sides are sealed with glass glue. Silica gel waterproof gaskets which are resistant to high temperature are installed around the glass and under the cover; the protection class is IP55.

 $\ensuremath{\mathsf{LED}}$ is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS

R3A0001 OS 3W Power LED White / With 700mA LED Driver / AC230V~50Hz **R3A0001** OB 3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz **R3A0001** OW 3W Power LED White / With 700mA LED Driver / AC230V~50Hz











COB LED(CITIZEN)


DL-R3A0019 OS **DL-R3A0019** OW

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The cover side is equipped with sandblasted fully toughened glass with woven design and the four sides are sealed with glass glue. Silica gel waterproof gaskets which are resistant to high temperature are installed around the glass and under the cover; the protection class is IP55.

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.



3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz


The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of










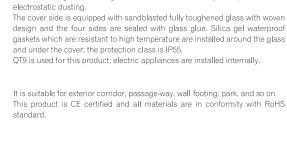





DL-R4A0135 OS DL-R4A0135 OW DL-R4A0135 OW 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V



NW: 0.65Kg






The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven $\ design; Silica \ gel \ waterproof \ gaskets \ which \ are \ resistant \ to \ high \ temperature$ are installed under the cover; the protection class is IP55.


LED is used for this product; electric appliances are installed internally.


It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS



ДГ7 145 x 95mm

DL- R3A0007 OS 3W Power LED White / With 700mA LED Driver / AC230V~50Hz **DL- R3A0007** OB 3W Power LED White / With 700mA LED Driver / AC230V~50Hz **DL- R3A0007** OW 3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz

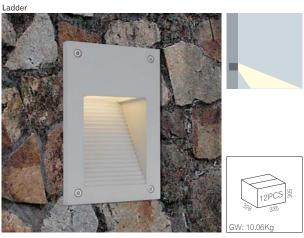





DL-R3A0013 OS

DL-R3A0013 OB

DL- R3A0013 OW

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55.

CITIZEN COB LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.


3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V $\sim\!50 \text{Hz}$ 3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz













QT9(PHILIPS)

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55.

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.


DL- R4A0141 OS 20W / excl. Electronic Transformer / G4 / AC12V DL- R4A0141 OB 20W / excl. Electronic Transformer / G4 / AC12V **DL- R4A0141** OW 20W / excl. Electronic Transformer / G4 / AC12V

Ladder











DL- R3A0006 OS

DL- R3A0006 OB

DL- R3A0006 OW

LED(EDISON)

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55.

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.

 $3\times1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz


3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz












The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55.

COB LED light source is used, and electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS





DL- R3A0014 OS DL-R3A0014 OB **DL-R3A0014** OW

3W LED 2700K-3000K / With 350mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 350mA LED Driver / AC230V \sim 50Hz 3W LED 2700K-3000K / With 350mA LED Driver / AC230V $\!\sim\!50\text{Hz}$








The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55.

COB LED light source is used, and electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with $\ensuremath{\mathsf{RoHS}}$ standard.





DL-R3A0015 OS **DL-R3A0015** OB **DL-R3A0015** OW


2 x 3W LED 2700K-3000K / With 350mA LED Driver / AC230V~50Hz $2\times3W$ LED 2700K-3000K / With 350mA LED Driver / AC230V $\!\sim\!50\text{Hz}$ $2\times3W$ LED 2700K-3000K / With 350mA LED Driver / AC230V $\sim\!50\text{Hz}$













The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The step cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gaskets which are resistant to high temperature are installed under the cover; the protection class is IP55

QT9 is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.



DL-R4A0140 OB **DL-R4A0140** OW

20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V









Д7 95 x 145mm



DL-R3A0008 OS **DL-R3A0008** OB DL-R3A0008 OW

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The convex cone cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.

 $3\times1W\,$ Power LED $\,$ White / With 350mA LED Driver / AC230V $\!\sim\!50Hz$ $3\times1W$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$ 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz










The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The convex cone cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55. QT9 is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS





DL- R4A0142 OS DL- R4A0142 OB **DL- R4A0142** OW


20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V









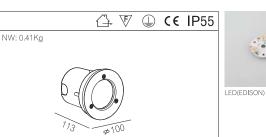

₽ 95mm



DL- R3A0004 OS **DL- R3A0004** OB **DL- R3A0004** OW The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting. The cover is equipped with sandblasted fully toughened glass with woven

design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$ $3 \times 1W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz





NW: 0.3Kg

NW: 0.30Kg











DL- R3A0011 OS

DL- R3A0011 OB

DL- R3A0011 OW

COB LED(CITIZEN)

₽ 95mm

7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz 7W LED 2700K-3000K / With 180mA LED Driver / AC230V \sim 50Hz

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of

The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is

COB LED light source is used, and electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS

installed under the cover; the protection class is IP55.

electrostatic dusting.

standard.

7W LED 2700K-3000K / With 180mA LED Driver / AC230V \sim 50Hz









₽ 95mm

QT9(PHILIPS)

DL- R4A0138 OS **DL- R4A0138** OB **DL- R4A0138** OW

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

QT9 is used for this product; electric appliances are installed internally.


It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.












The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

LED is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS





DL- R3A0005 OS 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz **DL- R3A0005** OB 3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz **DL-R3A0005** OW $3\,x\,1W\,$ Power LED $\,$ White / With 350mA LED Driver / AC230V $\sim\!50Hz$






The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

COB LED light source is used, and electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.





DL- R3A0012 OS 7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz **DL-R3A0012** OB 7W LED 2700K-3000K / With 180mA LED Driver / AC230V $\sim\!50 \text{Hz}$ **DL-R3A0012** OW 7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz








The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of

The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

QT9 is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS





DL-R4A0139 OS DL-R4A0139 OB **DL-R4A0139** OW 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V








The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting. The convex cone cover is equipped with fully toughened glass with woven

design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

 $\ensuremath{\mathsf{LED}}$ is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.





DL-R3A0003 OS **DL-R3A0003** OB **DL-R3A0003** OW


3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz











₽ 95mm



DL-R3A0010 OS DL-R3A0010 OB **DL-R3A0010** OW

The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The cover is equipped with sandblasted fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

COB LED light source is used, and electric appliances are installed internally.


It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS

3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V $\sim\!50\text{Hz}$











DL-R4A0137 OS DL-R4A0137 OB DL-R4A0137 OW The cover frame and the lamp body are made of aluminum alloy and are molded through die-casting; the surface is treated by two processes of electrostatic dusting.

The convex cone cover is equipped with fully toughened glass with woven design; Silica gel waterproof gasket which is resistant to high temperature is installed under the cover; the protection class is IP55.

QT9 is used for this product; electric appliances are installed internally.

It is suitable for exterior corridor, passage-way, wall footing, park, and so on This product is CE certified and all materials are in conformity with RoHS standard.

20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V 20W / excl. Electronic Transformer / G4 / AC12V











3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of

PC light transmission housing is used; above and under the housing silica gel waterproof gaskets which are resistant to high temperature are installed; the

High power LED is used, electric appliances are installed internally; this

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines; the surface is treated by two processes of

PC light transmission housing is used; above and under the housing silica gel waterproof gaskets which are resistant to high temperature are installed; the

High power LED is used, electric appliances are installed internally; this


It is suitable for residential area, villa, park, outdoor leisure area, holiday village This product is CE certified and all materials are in conformity with RoHS

electrostatic dusting.

protection class is IP55.

standard.

product has models for different heights.













DL-L3A0018 OS


DL-L3A0018 OB

DL-L3A0002 os 3W Power LED White / With 700mA LED Driver / AC230V~50Hz DL-L3A0002 OB 3W Power LED White / With 700mA LED Driver / AC230V \sim 50Hz

electrostatic dusting.

protection class is IP55.

product has models for different heights.





LED(EDISON)


7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz 7W LED 2700K-3000K / With 180mA LED Driver / AC230V \sim 50Hz












PC light transmission housing is used; above and under the housing silica gel waterproof gaskets which are resistant to high temperature are installed; the

protection class is IP55. High power LED is used, electric appliances are installed internally; this product has models for different heights.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS





DL-L3A0003 OS **DL-L3A0003** OB

3W Power LED White / With 700mA LED Driver / AC230V~50Hz 3W Power LED White / With 700mA LED Driver / AC230V~50Hz





NW: 2.25Kg







DL- L3A0004 os DL- L3A0004 OB

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.

With 3 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

and so on.
This product is CE certified and all materials are in conformity with RoHS standard.

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3\times1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the

It is suitable for residential area, villa, park, outdoor leisure area, holiday village This product is CE certified and all materials are in conformity with RoHS


With 3 pieces LED light source and built-in electronic appliance.













DL- L3A0005 OS DL- L3A0005 OB

 $3\,x\,1W$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$ $3\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$

electrostatic dusting.

protection class is IP55.

standard.


www.winnerlight.co.th 201












8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.
With 3 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS





DL- L3A0006 OS **DL- L3A0006** OB

3 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $3\,x\,1W\,$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$











protection class is IP55. With 3 pieces LED light source and built-in electronic appliance.


The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the

electrostatic dusting.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS





DL-L3A0007 OS **DL-L3A0007** OB $2 \times (3 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz 2 x (3 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.

With 3 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.





DL-L3A0008 OS DL-L3A0008 OB


 $2 \times (3 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $2\times(3\times1)W$ Power LED White / With 350mA LED Driver / AC230V $\sim\!50Hz$













DL- L3A0009 OS

DL- L3A0009 OB

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.
With 3 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS

 $2 \times (3 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $2 \times (3 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz













DL-L3A0010 OS DL-L3A0010 OB which is resistant to high temperature is installed around the glass; the protection class is IP55. With 5 pieces LED light source and built-in electronic appliance.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

electrostatic dusting.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS

⊕ C€ IP55 NW: 3.5Kg



 $5\times1W\,$ Power LED White / With 350mA LED Driver / AC230V~50Hz 5 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.

With 5 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.






DL-L3A0011 OS **DL-L3A0011** OB 5 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz 5 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz













DL- L3A0012 OS

DL- L3A0012 OB

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of


8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.
With 5 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS

5 x 1W Power LED White / With 350mA LED Driver / AC230V~50Hz $5 \times 1 W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz



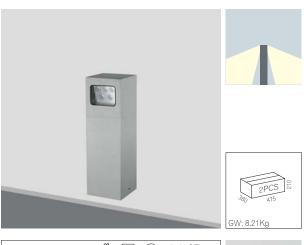




The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.

With 10 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.


This product is CE certified and all materials are in conformity with RoHS standard.





DL-L3A0013 OS DL-L3A0013 OB 2 x (5 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz $2 \times (5 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz







The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket which is resistant to high temperature is installed around the glass; the protection class is IP55.

With 10 pieces LED light source and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.

2 x (5 x 1)W Power LED White / With 350mA LED Driver / AC230V~50Hz















The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

8mm Clear optical toughened glass is installed. Silica gel waterproof gasket

electrostatic dusting.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS






DL- L3A0015 OS **DL- L3A0015** OB


 $2 \times (5 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz $2 \times (5 \times 1)W$ Power LED White / With 350mA LED Driver / AC230V \sim 50Hz



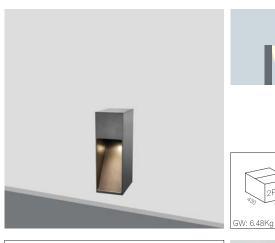








By using Edison high power LED chip, together with its custmized LED lens, this product creates an excellent lumen performance; Waterproof rate: IP55

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.





DL- L3A0036 OS **DL- L3A0036** OB 3 x 2W LED 2700K-3000K / With 500mA LED Driver / AC230V~50Hz $3\times2W$ LED 2700K-3000K / With 500mA LED Driver / AC230V $\sim\!50Hz$








This product contains a pure aluminum body, completes with powder coating finishing;
By using Edison high power LED chip, together with its custmized LED lens,

this product creates an excellent lumen performance; Waterproof rate: IP55

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.






DL- L3A0037 OS DL- L3A0037 OB $3\times2W$ LED 2700K-3000K / With 500mA LED Driver / AC230V $\sim\!50Hz$ $3\times2\text{W LED}\ 2700\text{K-}3000\text{K}$ / With 500mA LED Driver / AC230V $\sim\!50\text{Hz}$













DL- L4A0005 OS

DL- L4A0005 OB

DL-L4A0006 OS

DL- L4A0006 OB

H-PIN(PHILIPS)

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

the protection class is IP55.

H-PIN light source is used.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.


Max.25W 230Im / G9 / AC230V~50Hz

Max.25W 230Im / G9 / AC230V~50Hz











H-PIN(PHILIPS)

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

the protection class is IP55.

H-PIN light source is used.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.

Max.25W 230Im / G9 / AC230V~50Hz

Max.25W 230Im / G9 / AC230V~50Hz



The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

It is suitable for residential area, villa, park, outdoor leisure area, holiday village This product is CE certified and all materials are in conformity with RoHS











electrostatic dusting. the protection class is IP55.

standard.

TC-TEL is used and built-in electronic appliance.

electrostatic dusting the protection class is IP55.


standard.

TC-TEL is used and built-in electronic appliance.

32W / With Electronic Ballast / GX24q-3 / AC230V~50Hz

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of

It is suitable for residential area, villa, park, outdoor leisure area, holiday village This product is CE certified and all materials are in conformity with RoHS





DL-L2B0003 OB

TC-TEL(PHILIPS)



NW: 7.28Kg









DL-L2B0001 os 32W / With Electronic Ballast / GX24q-3 / AC230V~50Hz **DL-L2B0001** OB


32W / With Electronic Ballast / GX24q-3 / AC230V~50Hz













DL- L2B0002 OS

DL- L2B0002 OB

The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting. the protection class is IP55.

TC-TEL is used and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

and so on.
This product is CE certified and all materials are in conformity with RoHS standard.

32W / With Electronic Ballast / GX24q-3 / AC230V~50Hz

32W / With Electronic Ballast / GX24q-3 / AC230V~50Hz












The lamp body is made of pure aluminum and is molded through extrusion. and then shaped by CNC machines. The surface is treated by two processes of

QR-CB51 light source is used, and electric appliances are installed internally. It is suitable for residential area, villa, park, outdoor leisure area, holiday village This product is CE certified and all materials are in conformity with RoHS





DL-L4A0004 OB

DL-L4A0004 os

Max.50W / With Electronic Transformer / GU5.3 / AC230V~50Hz Max.50W / With Electronic Transformer / GU5.3 / AC230V~50Hz



7W / GU5.3 / AC230V~50Hz 7W / GU5.3 / AC230V~50Hz

the protection class is IP55.

standard.








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

the protection class is IP55.

QR-CB51 light source is used, and electric appliances are installed internally.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village

This product is CE certified and all materials are in conformity with RoHS standard.





QR-CB51 (PHILIPS)

GW: 8.7Kg

DL-L4A0003 os **DL-L4A0003** OB

Max.50W / With Electronic Transformer / GU5.3 / AC230V~50Hz Max.50W / With Electronic Transformer / GU5.3 / AC230V $\sim\!50\text{Hz}$



7W / GU5.3 / AC230V~50Hz 7W / GU5.3 / AC230V~50Hz















QPAR16 is used and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.





DL-L4A0001 OS **DL-L4A0001** OB

50W / GU10 / AC230V~50Hz 50W / GU10 / AC230V~50Hz



LED OPAR16(PHILIPS)

7W / GU10 / AC230V~50Hz 7W / GU10 / AC230V~50Hz








The lamp body is made of pure aluminum and is molded through extrusion, and then shaped by CNC machines. The surface is treated by two processes of electrostatic dusting.

the protection class is IP55.

QPAR16 is used and built-in electronic appliance.

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.





DL-L4A0002 OS **DL- L4A0002** OB 50W / GU10 / AC230V~50Hz

50W / GU10 / AC230V~50Hz



LED QPAR16(PHILIPS)


7W / GU10 / AC230V~50Hz 7W / GU10 / AC230V~50Hz













DL-L3B0001 OS **DL-L3B0001** OB

This product contains a pure aluminum body and pure aluminum heat sink, completes with powder coating finishing;

By using the new generation of CITIZEN COB LED chip,

this product creates extreme low heat and offers an excellent lumen performance;

The diffuser is made of clear tempered glass, which offers an even light output and high lumen efficacy, The beam corn is well designed and creates a beatiful $% \left(1\right) =\left(1\right) +\left(1\right) +\left($ light effect.

Waterproof rate: IP55

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.

3W LED 2700K-3000K / With 300mA LED Driver / AC230V~50Hz 3W LED 2700K-3000K / With 300mA LED Driver / AC230V $\sim\!50 \text{Hz}$








DL-L3B0002 os

DL-L3B0002 OB





completes with powder coating finishing;
By using the new generation of CITIZEN COB LED chip, this product creates extreme low heat and offers an excellent lumen performance;

This product contains a pure aluminum body and pure aluminum heat sink,

The diffuser is made of clear tempered glass, which offers an even light output and high lumen efficacy, The beam corn is well designed and creates a beatiful light effect.

Waterproof rate: IP55

It is suitable for residential area, villa, park, outdoor leisure area, holiday village and so on.

This product is CE certified and all materials are in conformity with RoHS standard.

7W LED 2700K-3000K / With 180mA LED Driver / AC230V~50Hz 7W LED 2700K-3000K / With 180mA LED Driver / AC230V $\sim\!50\text{Hz}$



