



## PROFILE LOUVER TYPE

### SPECIFICATION

#### HOUSING

- DIE-FORMED COLD-ROLLED STEEL  
AVAILABLE IN □ 0.4 , □ 0.6 , □ 0.8 mm.  
STEEL THICKNESS
- ALL METAL PART ARE RUST-PROOFED AFTER  
FABRICATION TO PREVENT ANY CORROSION  
(ZINE PHOSPHATE)
- FINISHED WITH HIGH GRADE EPOXY POLYESTER  
POWDER COATING
- G5 ROTARY LOCKED LAMP HOLDER
- THW □ 0.5 sqmm./105c □ 1.0 sqmm./70c  
WIRING CABLE

#### REFLECTOR & LOUVER




- 99.80% PURITY ANODIZED ALUMINIUM  
REFLECTOR TO PROVIDE TOTAL REFLECTANCE OF  
□ TR 87% □ TR 95% FOR MIRROR FINISH
- PARABOLIC REFLECTOR MACHINED TO PROVIDE  
OPTIMUM OPTICAL PERFORMANCE FOR  
LONGITUDINAL
- CHRISTMAS TREE PROFILES FOR TRANSVERSAL

#### INSTALLATION

- AVAILABLE IN RECESSED T-BAR OR CONCEAL CEILING

#### DIMENSIONS (mm.)

| MODEL     | TYPE | W   | W1  | L    | L1   | H   | CEILING CUT OUT (mm.)<br>A x B |
|-----------|------|-----|-----|------|------|-----|--------------------------------|
| WLR1/1/1S | T5   | 145 | 107 | 570  | 595  | 110 | 120 x 575                      |
| WLR1/3/1S | T5   | 295 | 271 | 570  | 595  | 80  | 278 x 575                      |
| WLR1/3/2S | T5   | 295 | 257 | 570  | 595  | 80  | 270 x 575                      |
| WLR1/1/1L | T5   | 145 | 107 | 1173 | 1197 | 110 | 120 x 1178                     |
| WLR1/3/1L | T5   | 295 | 271 | 1173 | 1197 | 80  | 278 x 1178                     |
| WLR1/3/2L | T5   | 295 | 257 | 1173 | 1197 | 80  | 270 x 1178                     |

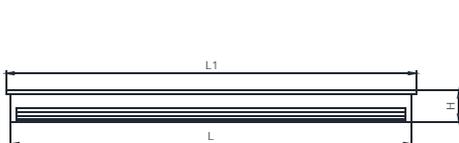

CEILING CUT OUT(mm.)

