


TUBULAR STEP

SPECIFICATION

- TUBULAR STEEL, WHICH 3.2MM.IN THICKNESS, SERVICE DOOR FOR CABLE CONNECTION, HOT DIP GALVANIZED OR UV RESISTANT POLYESTER POWDER COAT

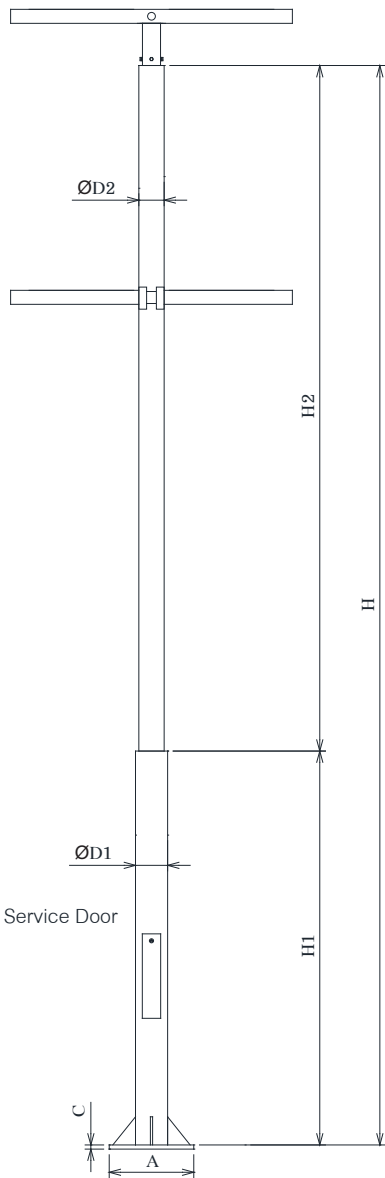

DIMENSIONS (mm.)									
MODEL	H	A x B x C	D	Ø	ØD1	ØD2	H1	H2	ADAPTER
WST432 T4-2 3M	3 M	300x300x15	200	25x60	3"	2"	1000	2000	
WST432 T4-2 4M	4 M	300x300x15	200	25x60	3"	2"	1500	3000	
WST443 T4-2 5M	5 M	350x350x15	250	30x70	4"	3"	1500	3500	2"
WST453 T4-2 6M	6 M	350x350x15	250	30x70	5"	3"	1500	4500	2"
WST453 T4-2 7M	7 M	350x350x15	250	30x70	5"	3"	1500	5500	2"
WST453 T4-2 8M	8 M	350x350x15	250	30x70	5"	3"	3000	6000	2"
WST453 T4-2 9M	9 M	400x400x15	300	30x70	5"	3"	3000	6000	2"

