


## SPECIFICATION



Parameter	UNIBollard
Type	BCP310/311/312
Light Source	LED
Power Consumption	15W
Input Voltage	100-240V AC, 50/60 Hz
System lumen output	760lm
System Efficacy	40lm/w
CRI	> 80
Color Temperature	2700K / 3000K / 4000K / 6500K
Optics cover/ lens type	PCF Polycarbonate bowl/cover frosted
Materials and finishing	Housing: Aluminium Optical cover: Polycarbonate Color: Black and Aluminium
Surge Rating	1kV/2kV
Cable	Cable 0.3 m with connector 3-pole
Weight	BCP310 = 1.45Kg net weight BCP311 = 2.5Kg net weight BCP312 = 4.3Kg net weight
Classifications	Class I
IP / IK Grade	IP65; IK 06
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF

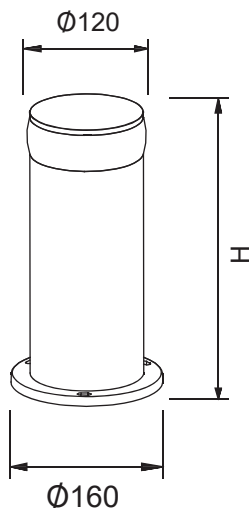

TYPE	POWER	H (mm.)	PRICE
BCP310 LED760/WW 15W 100-240V Cyl BK	15W	300	4,840
BCP311 LED760/WW 15W 100-240V Cyl BK	15W	600	5,940
BCP312 LED760/WW 15W 100-240V Cyl BK	15W	1200	7,590