


SPECIFICATION



Parameter	UNIUrban
Type	BDP461
Light Source	LED
Power Consumption	33W / 65W / 100W
Input Voltage	110-277V AC, 50/60 Hz
System lumen output	33W: 3000lm 65W: 6000lm 100W: 10000lm
System Efficacy	≥ 100lm/w
CRI	≥ 70
Color Temperature	3000K / 4000K
Color Consistency	SDCM ≤ 5
Optical	TS: Symmetrical 90°*90°
Housing Materials	Die-cast Aluminium 5mm plate tempered glass 5mm
Surface Color	RAL9007
Input Interface	flying wire : 20cm, 3*1.0mm2
Lifetime	50,000 hrs (L70/B50) @ta=40°C
Mounting Pole Dimensions	Ø55-60 outer diameter
Weight	10.7-11.5KG net weight
IP / IK Grade / Classifications	IP65; IK 08; Class I
Operating Temperature	- 40°C to + 50°C
Controls	ON / OFF
Certifications	CB, CQC, SAA, CE
Appearance/Mounting type	Post-Top

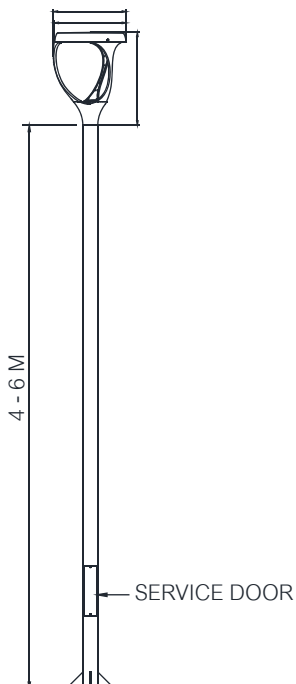

TYPE	POWER	CCT	TILT ANGLE	PRICE
BDP461 LED33/WW 110-277V TS	33W	3000K	N.A	16,000
BDP461 LED33/NW 110-277V TS	33W	4000K	N.A	16,000
BDP461 LED65/WW 110-277V TS	65W	3000K	N.A	18,000
BDP461 LED65/NW 110-277V TS	65W	4000K	N.A	18,000
BDP461 LED100/WW 110-277V TS	100W	3000K	N.A	20,000
BDP461 LED100/NW 110-277V TS	100W	4000K	N.A	20,000

* ราคาไม่รวมเสาไฟและฐานราก

