PHILIPS

Lighting

RoadFlair Gen2

BRP491 LED102/NW 70W 220-240V DM GM

10200 lm - 70 W - 4000 K

The RoadFlair Gen2 is brand new design road lighting product family, set to meet customers' all-round requirements, including high lumen efficacy for energy saving and sustainability, an aesthetic design with nice shapes and appearance, quality materials and components for product reliability and long lifetime, professional optics for various applications, a dimming and system control interface for improving municipal operations and offering future-proof features. The RoadFlair Gen2 competitive price will help with the acceleration of road lighting LED transformation, to a more sustainable society and smarter city.

Product data

General information	
Lamp colour code	740 neutral white
Driver included	Yes
Optical cover/lens type	PC-MLO [Polycarbonate micro lens optic]
Control interface	Analog
Connection	SI [Screw connection block]
Cable	-
Protection class IEC	Safety class I (I)
CE mark	CE mark

Operating and electrical	
Input Voltage	220 to 240 V
Input frequency	50 or 60 Hz
Power factor (min.)	0.95

Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Housing material	Aluminium pressure die cast
Optical cover/lens material	Polycarbonate
Overall length	355 mm
Overall width	230 mm
Overall height	136 mm
Colour	Aluminium and Grey
Dimensions (height x width x depth)	136 x 230 x 355 mm

Approval and application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]

RoadFlair Gen2

Initial performance (IEC compliant)	
Initial luminous flux (system flux)	10200 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	140 lm/W
Lamp colour temperature	4000 K
Colour Rendering Index	>70
Initial input power	70 W
Power consumption tolerance	+/-10%

Application conditions	
Ambient temperature range	-40 to +50 °C

Product data	
Full product code	911401673006
Order product name	BRP491 LED102/NW 70W 220-240V DM GM
Order code	911401673006
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	911401673006
Net Weight (Piece)	3.600 kg

IP66 IK08

Dimensional drawing

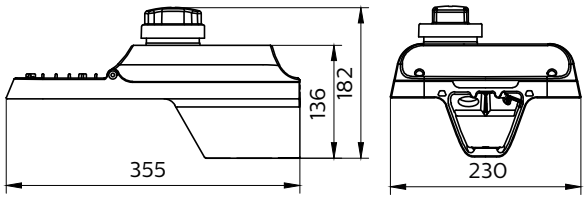

BRP491 LED102/NW 70W 220-240V DM GM

© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.