

RECESSED DOWNLIGHT COB

SPECIFICATION



Series	ALMACH V1
Input Voltage	220-240Vdc , 50Hz
Color Temperature	3000K , 4000K , 5000K
CRI	≥ 90 Ra
Unified Glare Rating (UGR)	< 22
Housing Materials	Adjustable Aluminium
Color	White , Black
Protection Class	IP 20
Controls	ON / OFF




Remark *(All of Tolerances ± 10%)

Model	Rated Power (W)	Luminous Flux (lm)	Beam Angle	Dimension WxLxH (mm)	Cut Out WxL (mm)
RDL/65/5S	5	460	15°/24°/30°/36°	80 x 80 x 54	65 x 65
RDL/85/9S	9	828	15°/24°/30°/36°	100 x 100 x 69	85 x 85
RDL/65/2X5S	2x5	920	15°/24°/30°/36°	150 x 80 x 54	135 x 65
RDL/85/2X9S	2x9	1650	15°/24°/30°/36°	190 x 100 x 69	175 x 85

Light Distribution Curve

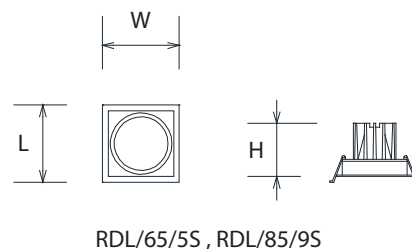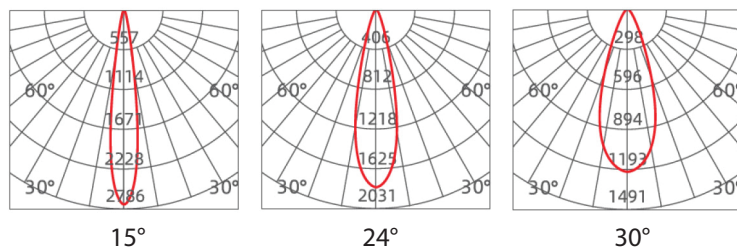

Replaceable Heatsink Assembly

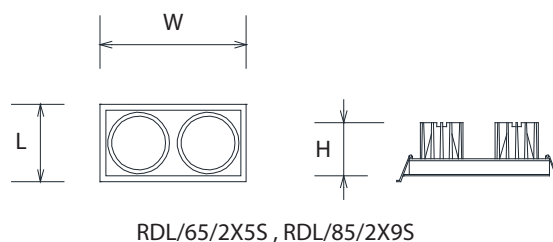

Dimension Drawing (mm)

