




FLOOD LIGHT

SPECIFICATION


Series	MSPORTS V2
Input Voltage	220-240Vac , 50/60Hz
Power Factor	> 0.9
Harmonic (%THDi)	< 15%
Color Temperature	3000K , 4000K , 5700K
CRI	> 70 Ra (Option : 80 Ra , 90 Ra)
Beam Angle	20° , 30° , 45° , 60° , Asymmetrical
Driver	Upshine / Sosen
LED Chip	SMD #5050
Housing Materials	Die-casting Aluminium with PC lens Cover
Color	Gray
Operating Temperature	- 30°C to + 40°C
Protection Class / IK Grade	IP 66 / IK 08
Installation	Standard Bracket
Surge Protection	6KV line-line / 10KV line-earth

Remark *(All of Tolerances $\pm 10\%$)




Model	Rated Power (W)	Efficacy (lm/W)	Luminous Flux (lm)	Module (Qty)	Dimension WxLxH (mm)	Weight (kg)
MSPORTS-400 V2	400	145	58000	2	365 x 336 x 331	7.5
MSPORTS-600 V2	600	145	87000	3	365 x 500 x 311	10.3
MSPORTS-800 V2	800	145	116000	4	698 x 349 x 314	18
MSPORTS-1200 V2	1200	145	174000	6	698 x 513 x 314	22


Light Distribution Curve




20°




30°




45°



60°



Asymmetrical

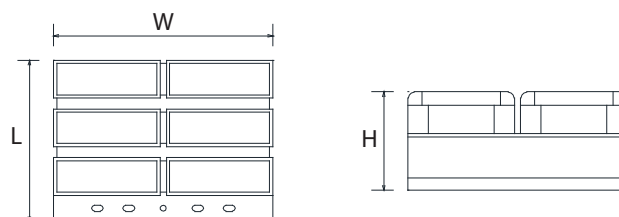

Dimension Drawing (mm)

