

TRACK LIGHT

SPECIFICATION


Series	TL/S/4017
Input Voltage	220-240V
Color Temperature	3000K , 4000K
Housing Materials	Aluminium
Color	White , Black , Grey
Protection Class	IP 20




Remark *(All of Tolerances $\pm 10\%$)

Model	Rated Power (W)	CRI (Ra)	Efficacy (lm/W)	Beam Angle	Dimension $\varnothing \times H$ (mm)
TL/S/4013H	14	> 90	65	15°/24°/ 36°/60°	60 x 180
TL/S/4014H	20	> 80	95	15°/24°/ 36°/60°	70 x 200
TL/S/4015H	28	> 90	90	15°/24°/ 36°/60°	85 x 222
TL/S/4016H	35	> 90	85	15°/24°/ 36°/60°	95 x 240
TL/S/4017H	42	> 80	110	15°/24°/ 36°/60°	110 x 240


Light Distribution Curve

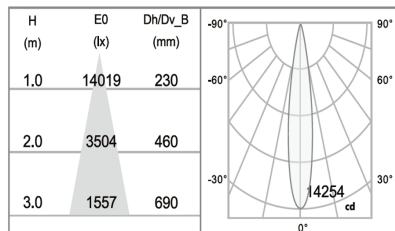


15°

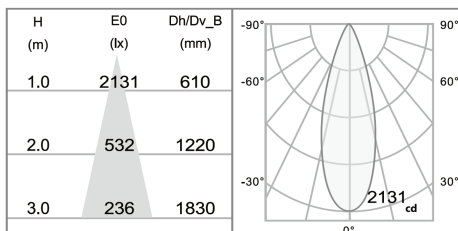

36°



Track System



CX-MA

Accessories



Honey comb



Barn door



Anti-glare ring



Lens



Reflector

Dimension Drawing (mm)

