

RECESSED DOWNLIGHT COB

SPECIFICATION


Series	ZETA V2
Input Voltage	220-240Vdc , 50Hz
Color Temperature	3000K , 4000K , 5000K
CRI	≥ 90 Ra
Unified Glare Rating (UGR)	< 19
Housing Materials	Fixed Aluminium
Color	White
Protection Class	IP 20
Controls	ON / OFF




Remark *(All of Tolerances $\pm 10\%$)

Model	Rated Power (W)	Luminous Flux (lm)	Beam Angle	Dimension WxLxH (mm)	Cut Out WxL (mm)
RDL/120/15S	15	1100	70°	140 x 140 x 85	120 x 120
RDL/140/20S	20	1635	70°	165 x 165 x 100	140 x 140

Light Distribution Curve



70°

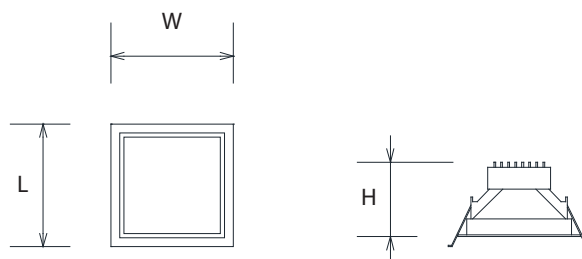

Dimension Drawing (mm)

