

FLOOD LIGHT

SPECIFICATION


Series	ZETA V2
Input Voltage	220-240Vac , 50Hz
Power Factor	> 0.9
Color Temperature	3000K , 4000K , 5700K
CRI	> 70 Ra (Option 80 Ra)
Beam Angle	30° , 60° , 90° , 70*150° , 135*60°
Driver	SOSEN
LED Chip	Lumileds 2835
Housing Materials	Die-casting Aluminium with PC lens and Tempered Glass Cover
Color	Black
Operating Temperature	- 30°C to + 40°C
Protection Class / IK Grade	IP 66 / IK 08
Installation	Standard Bracket
Surge Protection	6KV




Remark *(All of Tolerances $\pm 10\%$)

Model	Rated Power (W)	Efficacy (lm/W)	Luminous Flux (lm)	Dimension WxLxH (mm)
FL/L386/200W 3CCT V2	120 / 160 / 200 (Selectable)	150	18000 / 24000 / 30000	386 x 414 x 51
FL/L354/50 V2	50	150	7500	254 x 239 x 38
FL/L320/100 V2	100	150	15000	320 x 314 x 49
FL/L358/150 V2	150	150	22500	358 x 364 x 49
FL/L386/200 V2	200	150	30000	386 x 414 x 51
FL/L460/250 V2	250	150	37500	460 x 480 x 54
FL/L460/300 V2	300	150	45000	460 x 480 x 54
FL/L550/400 V2	400	150	60000	550 x 589 x 56
FL/L550/500 V2	500	150	75000	550 x 589 x 56


Light Distribution Curve




60°



90°



70x150°

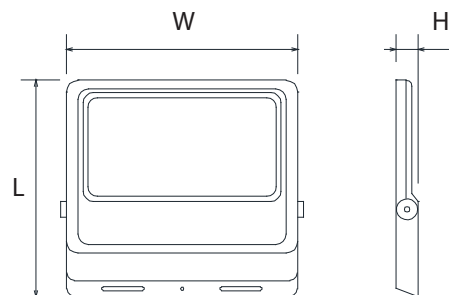

Dimension Drawing (mm)

