

# POST TOP LIGHT





## SPECIFICATION

| Parameter                | Smart Post Top G3   |
|--------------------------|---|
| Type                     | BGP161  |
| Light Source             | Mid Power LED   |
| Power Consumption        | 27W   |
| Input Voltage            | 220-240V AC, 50/60 Hz   |
| System lumen output      | 2300lm @ 3000K CCT<br>2500lm @ 4000K CCT  |
| System Efficacy          | > 85lm/w @ 3000K CCT<br>> 92lm/w @ 4000K CCT  |
| CRI                      | > 70  |
| Color Temperature        | 3000K / 4000K   |
| Color Consistency        | SDCM ≤ 4  |
| Optics                   | Symmetrical Beam  |
| Materials and finishing  | Housing: Die-casting Alum., 500hrs salt spray<br>Optical cover: Polycarbonate, Anti-UV<br>Color: Dark Grey RAL7043 / Light Grey RAL9006 |
| Lifetime                 | 50K hours<br>(70% lumen maintenance @ Ta = 35°C)  |
| Mounting Pole Dimensions | Ø60mm, leader cable 0.5m  |
| Luminaire Dimension      | Ø578mm x H265mm   |
| Weight                   | 4.5Kg net weight  |
| Classifications          | Class I   |
| IP / IK Grade            | IP65; IK 07   |
| Operating Temperature    | - 40°C to + 50°C  |
| Controls                 | ON / OFF  |
| Certifications           | CB, CQC, RoHS, IEC, GB7000  |



| TYPE                                | POWER | CCT   | COLOR             | PRICE  |
|-------------------------------------|-------|-------|-------------------|--------|
| BGP161 LED2500/WW PSU 220-240V 9006 | 27W   | 3000K | 9006 (Light Grey) | 13,700 |
| BGP161 LED2500/WW PSU 220-240V 7043 | 27W   | 3000K | 7043 (Dark Grey)  | 13,700 |
| BGP161 LED2500/NW PSU 220-240V 9006 | 27W   | 4000K | 9006 (Light Grey) | 13,700 |
| BGP161 LED2500/NW PSU 220-240V 7043 | 27W   | 4000K | 7043 (Dark Grey)  | 13,700 |

\* (ราคาไม่รวมเสาไฟและฐานราก)

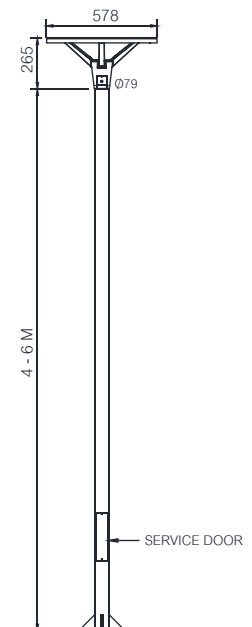

092

[www.winnerlight.co.th](http://www.winnerlight.co.th)